

Product Data Sheet RG190-39/14/2TDMO-221

**ebmpapst**

The engineer's choice



RG190-39/14/2TDMO-221

INDEX

<b>1</b>	<b>General</b> .....	<b>3</b>
<b>2</b>	<b>Mechanics</b> .....	<b>3</b>
2.1	General .....	3
2.2	Connections .....	3
<b>3</b>	<b>Operating Data</b> .....	<b>4</b>
3.1	Operating Data - Electrical Interface - Input .....	4
3.2	Electrical Operating Data .....	7
3.3	Operating Data - Electrical Interface - Output .....	8
3.4	Electrical Features .....	9
3.5	Data According ErP Directive .....	9
3.6	Aerodynamics .....	10
3.7	Sound Data .....	12
<b>4</b>	<b>Environment</b> .....	<b>12</b>
4.1	General .....	12
4.2	Climatic Requirements .....	12
<b>5</b>	<b>Safety</b> .....	<b>13</b>
5.1	Electrical Safety .....	13
5.2	Approval Tests .....	13
<b>6</b>	<b>Reliability</b> .....	<b>13</b>
6.1	General .....	13

**1 General**

Fan type	Blower	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air in axially, Air out radially	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


**2 Mechanics**

**2.1 General**

Width	225 mm	
Height	225 mm	
Depth	85 mm	
Mass	1,2 kg	
Housing material	Plastic	
Impeller material	Plastic	

**2.2 Connections**

Electrical connection	Wires	
Lead wire length	L = 350 mm	
Tolerance	+ - 10,0 mm	
Tube length	S = 36 mm	
Tolerance	+ - 5 mm	
Wire size (AWG)	18	
Insulation diameter	2,05 mm	
Contact	See drawing	

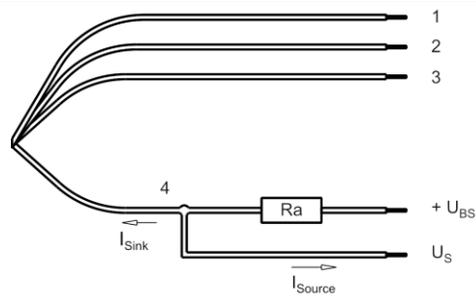

Wire	Colour	Operation
1	red	+ UB
2	blue	- GND
3	violet	CONTR
4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

Lead wire 1 - 2: AWG20

Lead wire 3 - 4: AWG22 (Insulation diameter 1,35mm)

**Note:**

It must be ensured that the power supply is applied before the control signal (U Contr) is turned on.

### 3 Operating Data



#### 3.1 Operating Data - Electrical Interface - Input

Control input	Analog
---------------	--------



#### Features

PWM - Frequency	1 kHz - 10 kHz Typical: 2 kHz
Input voltage range	0 V - 10 V

#### Characteristics

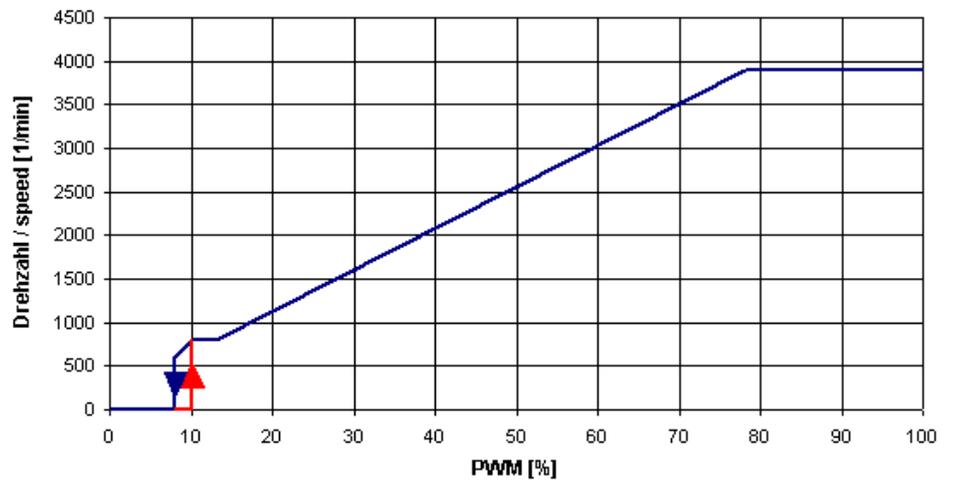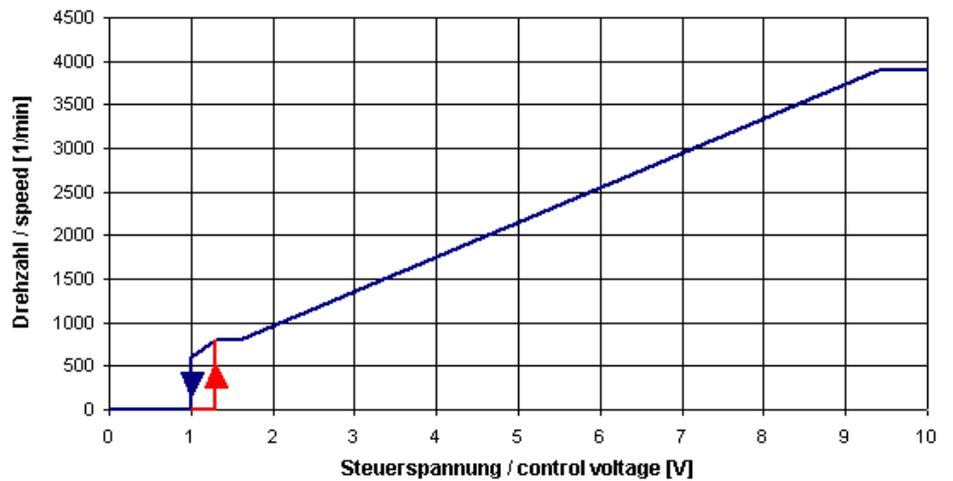

Schematics

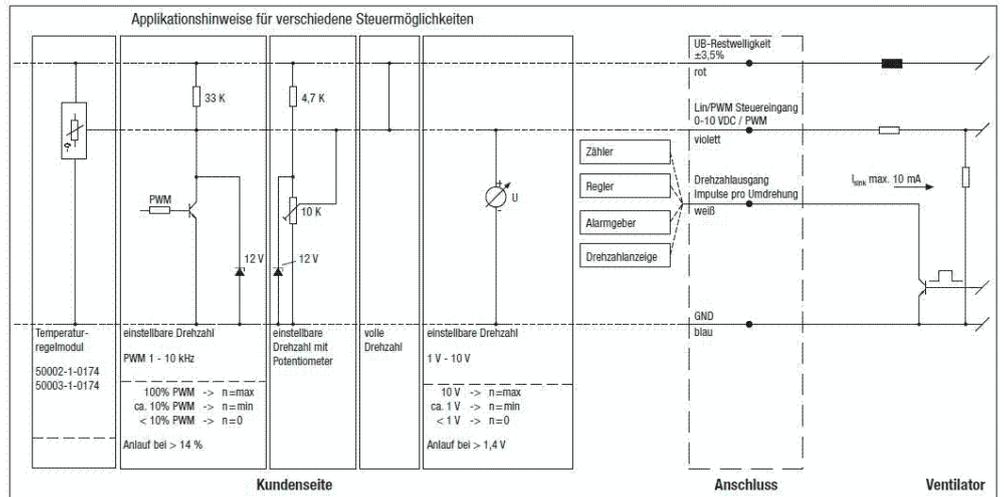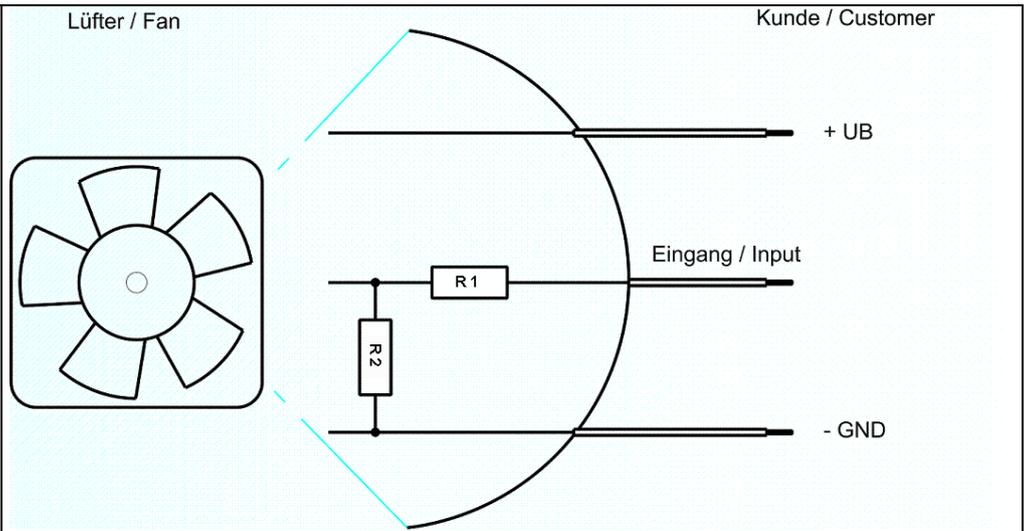

**Input voltage divider:**

R1 = 47 kOhm

R2 = 36 kOhm

For protection: There is parallel to R2 a 5,1 V Z-Diode

**Speed control:**

By pulse-width modulation (PWM) 0 ... 100%

with switching transistor in emitter circuit and collector resistance to 12 V

Frequency = 2 kHz (1 - 10 kHz)

**Information to the curve PWM:**

0% - &lt;10% PWM: 0 1/min

10% PWM: 800 1/min (Fan on, comming from 0% PWM)

10% - 13% PWM: 800 1/min (corresponding to min. speed)

13% - 78% PWM: linear increasing curve

78% - 100% PWM: 3.900 1/min (corresponding to max. speed)

10% - &gt;8% PWM: linear decreasing curve (comming from 100% PWM)

8% PWM: 600 1/min or 0 1/min (Fan off, comming from 100%

PWM)

oder:

**Speed control:**

By analog voltage 0 - 10 V

**Information to the curve analog:**

0 V - &lt; 1,3 V: 0 1/min

1,3 V: 800 1/min (Fan on,

comming from von 0 V)

1,3 V - 1,6 V: 800 1/min (corresponding to min. speed)

1,6 V - 9,4 V: linear increasing curve

9,4 V - 10 V: 3.900 1/min (corresponding to max. speed)

1,3 V - &gt; 1,0 V: linear decreasing curve (comming from 10 V)

1,0 V: 600 1/min or 0 1/min

(Fan off, comming from 10 V)

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
I: corresp. to arithm. mean current value


Name	Condition
U Contr. 0001	U Contr.: 10,0 V

**No sensor break detection. Speed is 0 1/min with open control input.**

Features	Condition	Symbol	Values		
Voltage range		U	16 V		36,0 V
Nominal voltage		$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	65 W	113 W	106,0 W
Tolerance	U Contr. 0010		+/- 10 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	4.080 mA	4.700 mA	2.930 mA
Tolerance	U Contr. 0010		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	3.350 1/min	3.900 1/min	3.900 1/min
Tolerance	U Contr. 0010		+/- 10,0 %	+/- 5,0 %	+/- 5,0 %

### 3.3 Operating Data - Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

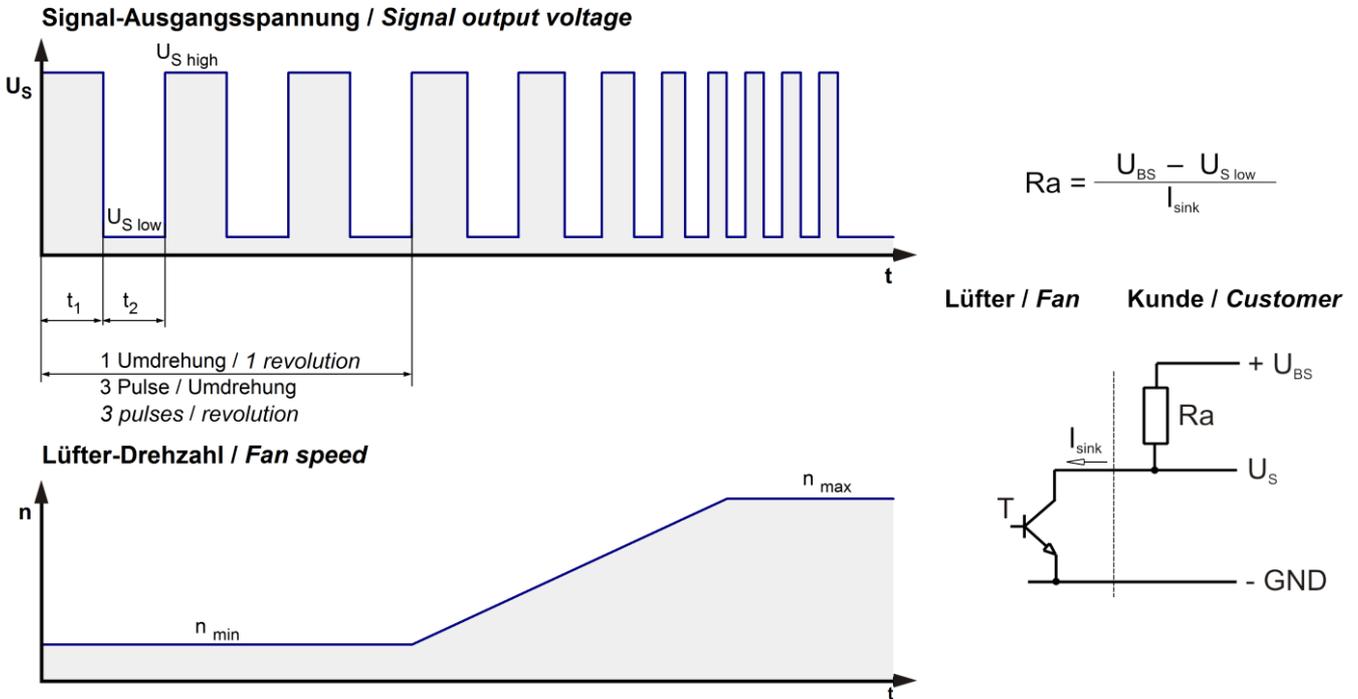

Features	Note	Values
Tacho operating voltage (UBS)		$\leq 60,0\text{ V}$
Tacho signal Low	$I_{sink}: 2\text{ mA}$	$\leq 0,4\text{ V}$
Tacho signal High	$I_{source}: 0\text{ mA}$	$\leq 60,0\text{ V}$
Maximum sink current		$\leq 20\text{ mA}$
Maximum source current		$0\text{ mA}$
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_S$ required. All voltages measured to GND.	
Tacho frequency	$(3 \times n) / 60$	$195\text{ Hz}$
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\text{ V/us}$


**Please note:**

At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.

The tacho signal is only activated after the start-up is completed.

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	P-CH FET	
Max. residual current at $U_N$	$I_F \leq 5 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{\text{block}}$ approx. 2.400 mA	
Clock signal at locked rotor	$t_3 / t_4$ Typical: 2,6 s / 10,0 s	

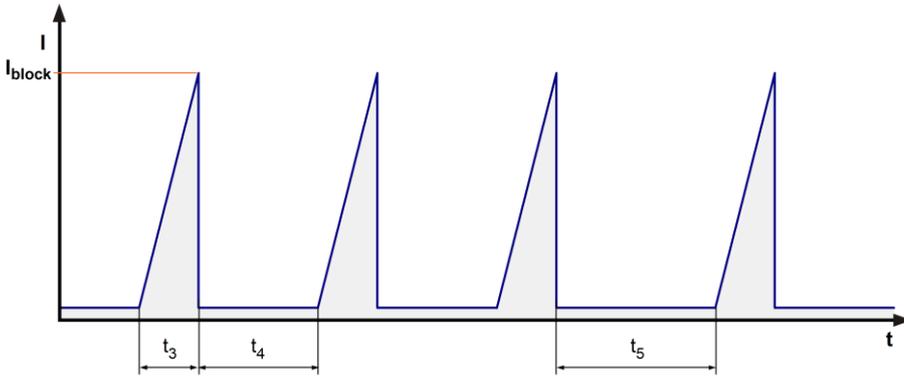

**Locked rotor signal  $t_5$ :**

After 4 failed start-ups there is an extended timeout of 40,0s.

### 3.5 Data According ErP Directive

Installation / Efficiency category	A / static
Speed control	integrated
Specific ratio	1,00473
Target overall efficiency 2015	41,4 %
Overall efficiency	51,7 %
Efficiency grade	61
Power input	135,6 W
Speed	3.900 1/min

All values measured in optimum energy efficiency point.

Productiondatecode is printed on the fan label.


### 3.6 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m.  
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.900 1/min at free air flow	U Contr. 10,0 V		
------------------------------	-----------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \max.$ )	815,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \max. / \dot{V} = 0$ )	740 Pa	

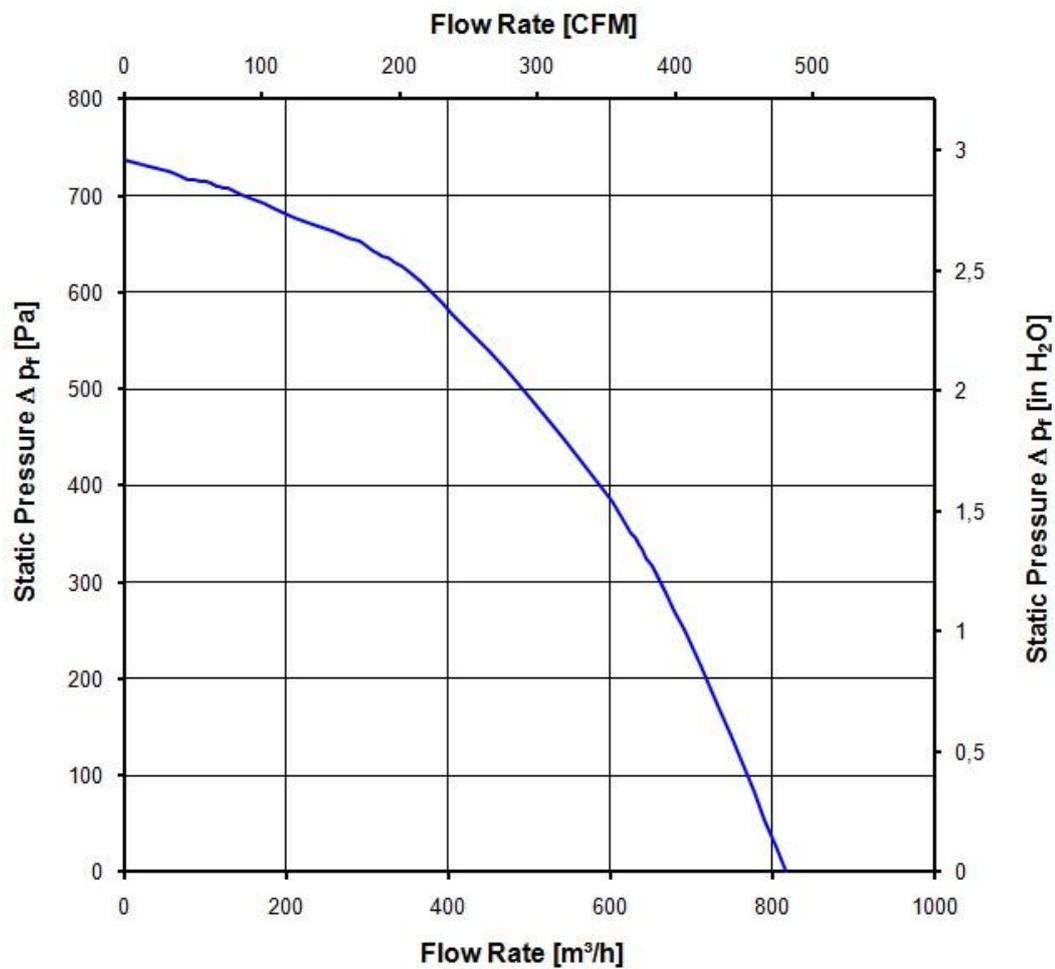

**3.7 Sound Data**

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of Lp(A) < 5 dB(A)  
 For further measurement conditions see section 3.5

a.) Operation condition:

3.900 1/min at free air flow	U Contr. 10,0 V		
------------------------------	-----------------	--	--

Optimal operating point	500,0 m3/h @ 444 Pa	
Sound power level at the optimal operating point	7,9 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		

**4 Environment**

**4.1 General**

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

**4.2 Climatic Requirements**

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

\*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

**5.2 Approval Tests**


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	No

**6 Reliability**

**6.1 General**

Life expectancy L10 at TU = 40 °C	52.500 h	
Life expectancy L10 at TU max.	30.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	87.500 h	

Ansicht mit Schutzgitter / view with finger guards

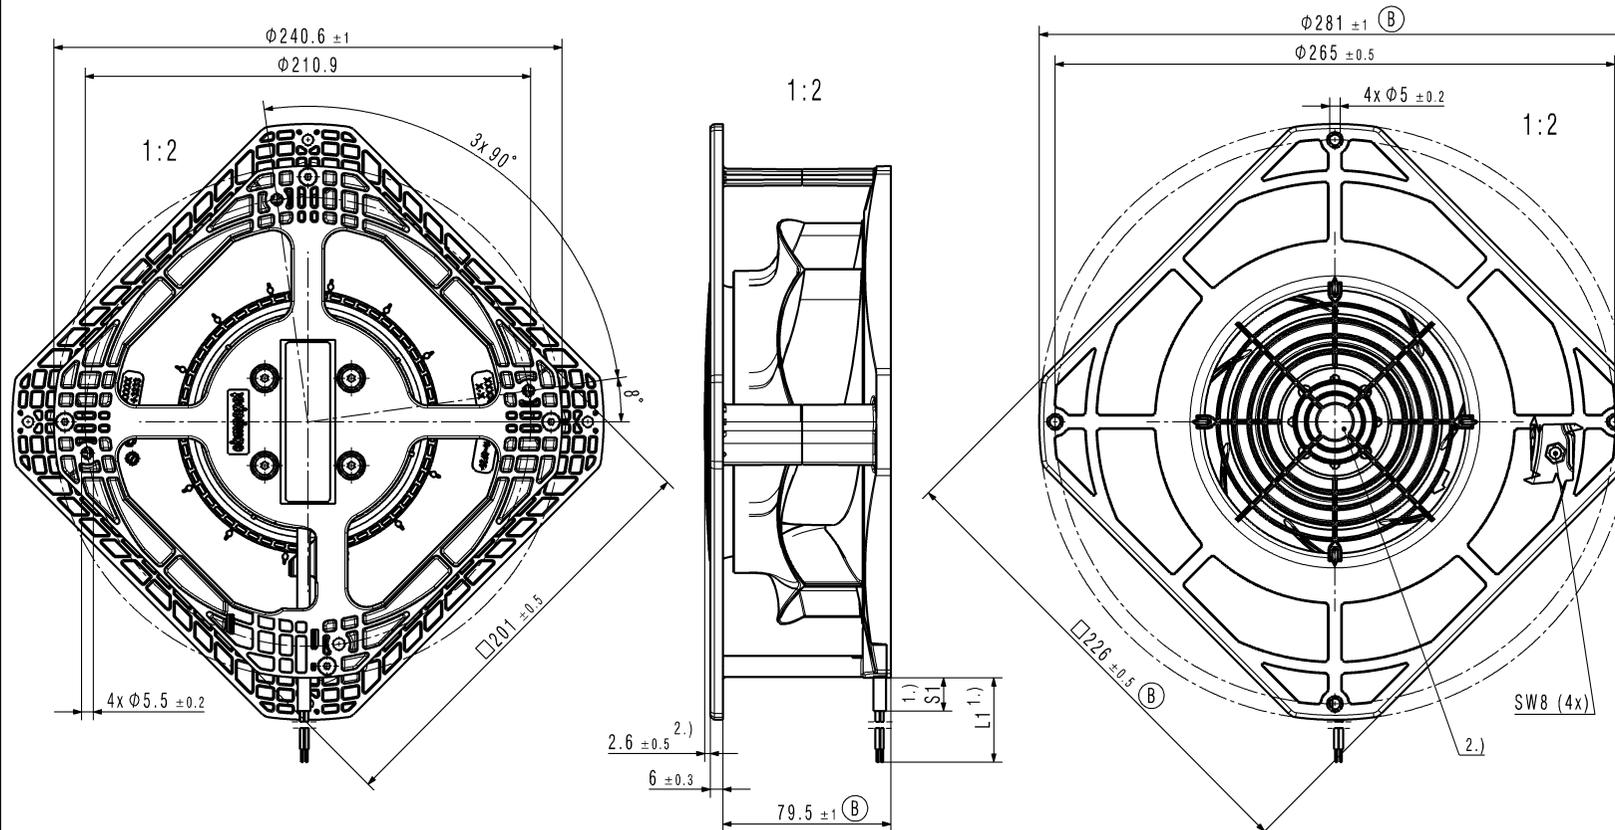

Copying of this document, and giving it others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN ISO 10166 Invention / Refer to protection notice DIN ISO 10166 /

- 1.) Anzahl und Länge der Litzen sowie Länge des Schlauches ab Flanschrand siehe Produktspezifikation
- 2.) Schutzgitter, nur wenn im Lieferumfang enthalten

- 1.) length and number of wires and length of tube from flange edge see design specification
- 2.) finger guards, only if included in delivery

SAP-Status/State		Änd.-Nr. / Change-No.		CATIA-System-Version / CATIA-System-Version		CAD-Umgebung / CAD-Environment		Werkstoff / Material:		Volumen / Volume (cm³):	
				9595400200 CPM000						Gewicht / Mass (g):	
Tolerierung / Tolerances:		3D-Referenzmodell / 3D-Referenzmodell:		Datum		Name		Artikel / Title:			
Allgemeintoleranzen / Gen. Tolerances:		Bearb. / Drawn						Zug.-Nr. / Drawing No:		Ers.-f.-Zug. / Replaces:	
		Freig. / Released:									
				Dokumenttyp / Type of Document		Teildokument (Blatt/Page)		Index / Index		Format / Size: Masstab/Scale	
		ebm-papst St. Georgen GmbH & Co KG									