

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.



Jameco Part Number 1881479

FLAT CHIP

THICK FILM (5% • 2%)

GENERAL PURPOSE

RK73B

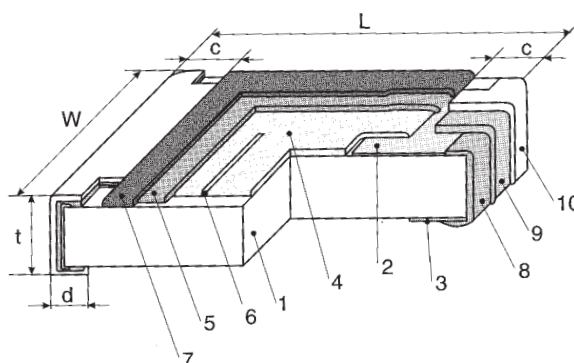

STRUCTURE

1	Ceramic substrate	
2	Top termination (Ag Pd)	~ 11 μm
3	Bottom termination (Ag Pd)	~ 11 μm
4	Resistive layer	~ 11 μm
5	Glass layer	~ 11 μm
6	Trimming cut	
7	Protective layer	~ 25 μm
8	End termination	~ 0.05 μm
9	Diffusion barrier (Ni)	~ 8 μm
10	Solder plating	~ 8 μm

IDENTIFICATION

TYPE	COATING COLOR	MARKING
RK73 1E and RK73 1H	Black	None
RK73 1J ... RK73 3A		White, 3 digits

TYPE DESIGNATION (HOW TO ORDER)

Old Part No.	RK73K	1J	G		TD	10K	
New Part No.	RK73B	1J		L	TD	103	G
	PRODUCT CODE	STYLE	TOLERANCE	TERMINATION SURFACE MATERIAL T: Sn L: Sn/Pb	TAPING*	NOMINAL RESISTANCE 3 digits	TOLERANCE

*Please see "PACKAGING"

FEATURES

- RuO₂ thick film resistor element
- Anti-leaching nickel barrier terminations
- Excellent heat resistance and moisture resistance are ensured by the use of metal glaze thick film
- Rated ambient temperature: +70° C
- Taping according to IEC-60 286-3
- Meets or exceeds IEC 60 115, CECC 40 401-802
- Suitable for reflow and wave soldering
- Lab Kit available

DIMENSIONS (mm)

SIZE	TYPE	L	W	c	d	t
0201	RK73 1H	0.6 ± 0.03	0.3 ± 0.03	0.1 ± 0.05	0.15 ± 0.05	0.23 ± 0.03
0402	RK73 1E	1.0 ^{+0.1} / _{-0.05}	0.5 ± 0.05	0.2 ± 0.1	0.25 ^{+0.05} / _{-0.1}	0.35 ± 0.05
0603	RK73 1J	1.6 ± 0.2	0.8 ± 0.1	0.3 ± 0.1	0.3 ± 0.1	0.45 ± 0.1
0805	RK73 2A	2.0 ± 0.2	1.25 ± 0.1	0.4 ± 0.2	0.3 ^{+0.2} / _{-0.1}	0.5 ± 0.1
1206	RK73 2B	3.2 ± 0.2	1.6 ± 0.2	0.5 ± 0.3	0.4 ^{+0.2} / _{-0.1}	0.6 ± 0.1
1210	RK73 2E		2.6 ± 0.2			
2010	RK73 2H	5.0 ± 0.2	2.5 ± 0.2			
2512	RK73 3A	6.3 ± 0.2	3.1 ± 0.2			

Specifications given herein may be changed at any time without prior notice.
Please confirm technical specifications before you order and/or use.

RATING

SIZE	TYPE	T.C.R. (ppm/K)	POWER RATING	MAX. WORKING VOLTAGE	MAX. OVERLOAD VOLTAGE	RESISTANCE RANGE (E24)		OPERATING TEMPERATURE RANGE
						G (± 2%)	J (± 5%)	
NEW 0201	RK73B 1H	± 400	0.05 W	25 V	50 V	—	1 Ω ... 9.1 Ω 1.1 MΩ ... 4.7 MΩ	- 55° C ... + 125° C*
		± 200				10 Ω ... 1 MΩ	10 Ω ... 1 MΩ	
0402	RK73B 1E	± 400	0.063 W	50 V	100 V	—	1 Ω ... 9.1 Ω	
		± 200				10 Ω ... 10 MΩ	10 Ω ... 10 MΩ	
0603	RK73B 1J	± 400	0.1 W			1 Ω ... 9.1 Ω 1.1 MΩ ... 22 MΩ	1 Ω ... 9.1 Ω 1.1 MΩ ... 22 MΩ	- 55° C ... + 155° C*
		± 200				10 Ω ... 10 MΩ	10 Ω ... 10 MΩ	
0805	RK73B 2A	± 400	0.125 W	150 V	200 V	1 Ω ... 9.1 Ω 1.1 MΩ ... 10 MΩ	1 Ω ... 9.1 Ω 1.1 MΩ ... 10 MΩ	
		± 200				10 Ω ... 1 MΩ	10 Ω ... 1 MΩ	
1206	RK73B 2B	± 400	0.25 W	200 V	400 V	1 Ω ... 9.1 Ω 6.2 MΩ ... 22 MΩ	1 Ω ... 9.1 Ω 6.2 MΩ ... 22 MΩ	- 55° C ... + 125° C*
		± 200				10 Ω ... 5.6 MΩ	10 Ω ... 5.6 MΩ	
		0.5 W 0.33 W				—	1 Ω ... 9.1 Ω 6.2 MΩ ... 10 MΩ	
1210	RK73B 2E	± 400	0.33 W			10 Ω ... 1 kΩ 1.1 kΩ ... 5.6 MΩ	10 Ω ... 1 kΩ 1.1 kΩ ... 5.6 MΩ	
		± 200				—	1 Ω ... 9.1 Ω 6.2 MΩ ... 22 MΩ	
2010	RK73B 2H	± 400	0.75 W			10 Ω ... 5.6 MΩ	10 Ω ... 5.6 MΩ	
		± 200				—	1 Ω ... 9.1 Ω 6.2 MΩ ... 22 MΩ	
2512	RK73B 3A	± 400	1 W			10 Ω ... 5.6 MΩ	10 Ω ... 5.6 MΩ	
		± 200						

* Please note derating diagram

FLAT CHIP


THICK FILM

RK73


PERFORMANCE

TEST	TEST CONDITIONS	TYP. TEST RESULTS
Life test at 70° C rated power (P_{70})	IEC 115-1 4.25.1 70° C $\pm$ 3° C, 1000 h; 1.5 h On / 0.5 h Off cycle	$\pm$ (1% $\cdot$ R + 0.05 Ω)
Rapid change of temperature	IEC 115-1 4.19 – 55° C (30 min) / + 125° C (30 min); 5 cycles	$\pm$ (0.5 % $\cdot$ R + 0.1 Ω)
Damp heat steady state	IEC 115-1 4.24 56 days at 40° C and 93% relative humidity	$\pm$ (1% $\cdot$ R + 0.05 Ω)
Endurance at 125° C	IEC 115-1 4.25.3 + 125° C / 1000 h	$\pm$ (1% $\cdot$ R + 0.05 Ω)
Short time overload	IEC 115-1 4.13 6.25 x rated power for 5 sec., but smaller 2.5 x U_{max}	$\pm$ (1% $\cdot$ R + 0.05 Ω)
T.C.R.	IEC 115-1 4.8 Cycle: + 25° C / – 55° C / + 25° C / + 125° C / + 25° C	Within specified T.C.R.
Bending test	IEC 115-1 4.31 Bending: 5 mm (1J, 2A, 2B); 3 mm (1H, 1E); 2 mm (2E, 2H, 3A)	$\pm$ (0.5% $\cdot$ R + 0.05 Ω)
Solderability	IEC 68-2-20 235 $\pm$ 5° C / 2 $\pm$ 0.5 sec.	Terminations > 95% covered with new solder
Resistance to soldering heat	IEC 115-1 4.18 10 $\pm$ 1 sec. at 260 $\pm$ 5° C solder bath temperature	$\pm$ (0.5% $\cdot$ R + 0.05 Ω)

DERATING CURVE

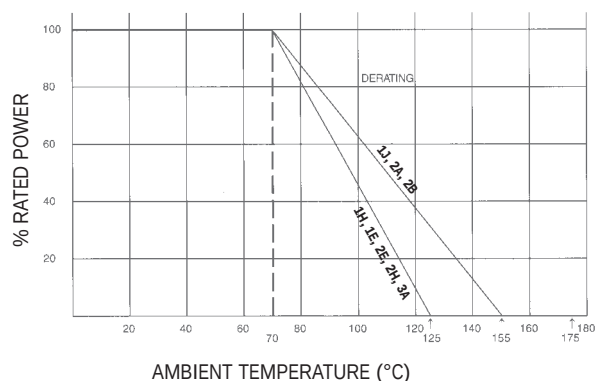


SURFACE TEMPERATURE RISE

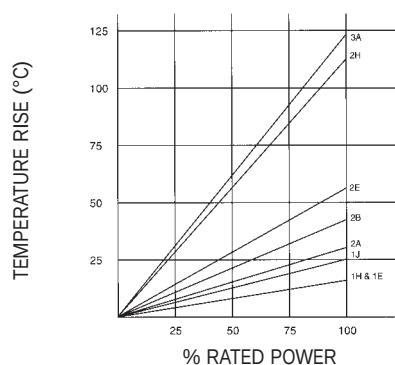

ONE-PULSE LIMITING ELECTRIC POWER

KOA RK73 Flat Chip Resistors

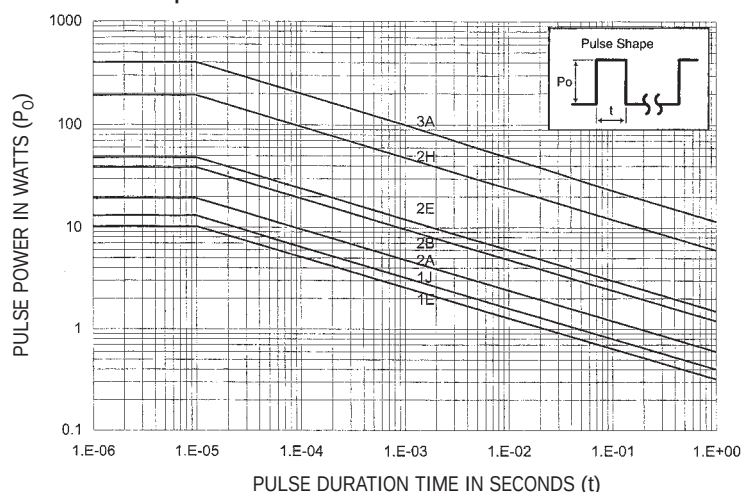


Specifications given herein may be changed at any time without prior notice.
Please confirm technical specifications before you order and/or use.

RECOMMENDED PAD DIMENSIONS

FOR REFLOW SOLDERING


TYPE	STYLE	DIMENSIONS (mm)				
		COMPONENT SIZE	A	B	C	D
RK73	1H	0.6 x 0.3	0.25	0.7	0.3	0.225
SG73	1E	1.0 x 0.5	0.5	1.3	0.3	0.4
RN73	1J	1.6 x 0.8	1.0	2.0	0.6	0.5
SR73	1J	1.6 x 0.8	1.0	2.0	0.6	0.5
RK73N	2A	2.0 x 1.25	1.3	2.5	1.05	0.6
LT73	2A	2.0 x 1.25	1.3	2.5	1.05	0.6
NT73	2B	3.2 x 1.6	2.2	4.0	1.4	0.9
PT72	2B	3.2 x 1.6	2.2	4.0	1.4	0.9
LA73	2E	3.2 x 2.5	2.2	4.0	2.3	0.9
CR73	2H	5.0 x 2.5	3.5	6.3	2.3	1.4
RF73	2H	5.0 x 2.5	3.5	6.3	2.3	1.4
KL73	3A	6.4 x 3.2	4.6	8.0	3.0	1.7

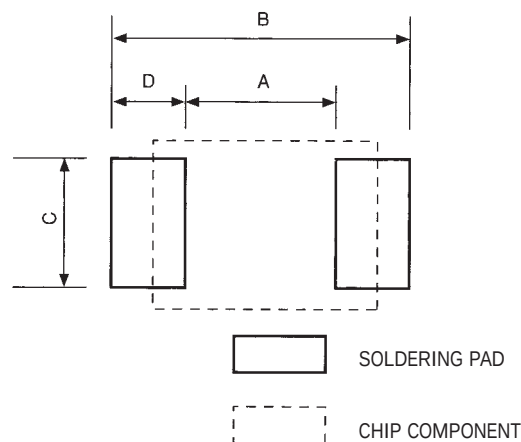

FOR WAVE SOLDERING

TYPE	STYLE	DIMENSIONS (mm)				
		COMPONENT SIZE	A	B	C	D
RK73	1E	1.0 x 0.5	0.5	1.5	0.5	0.5
SG73	1J	1.6 x 0.8	1.0	2.4	0.8	0.7
RN73	1J	1.6 x 0.8	1.0	2.4	0.8	0.7
SR73	2A	2.0 x 1.25	1.3	3.1	1.25	0.9
RK73N	2A	2.0 x 1.25	1.3	3.1	1.25	0.9
LT73	2B	3.2 x 1.6	2.2	4.4	1.6	1.1
NT73	2B	3.2 x 1.6	2.2	4.4	1.6	1.1
LA73	2E	3.2 x 2.5	2.2	4.4	2.5	1.1
CR73	2H	5.0 x 2.5	3.5	6.3	2.5	1.4
RF73	2H	5.0 x 2.5	3.5	6.3	2.5	1.4
KL73	3A	6.4 x 3.2	4.6	8.0	3.2	1.7

RECOMMENDED IR PROFILE (FLAT TYPE COMPONENTS)

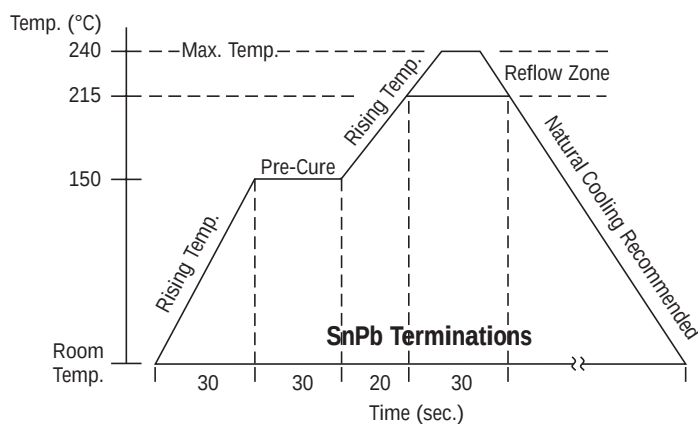

RECOMMENDED WAVE SOLDER PROFILE (FLAT TYPE COMPONENTS)

