

**M8-Round-Plug Connector, Single-Ended Cordsets**

RKMV 3 | RKMV 4 | RKMWV 3 | RKMWV 4

RKMV | RKMWV




**3- and 4-Poles**

Actuator/sensor cordset, single-ended, M8, 3- and 4-poles, female straight connector with self-locking threaded joint and molded cable.


Actuator/sensor cordset, single-ended, M8,

**RKMV**

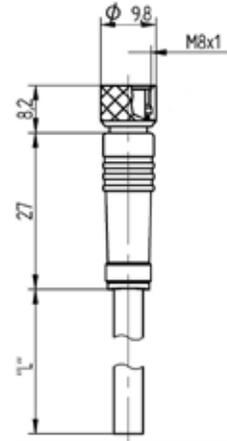

3- and 4-poles, female 90° connector with self-locking threaded joint and molded cable.


**RKMWV**

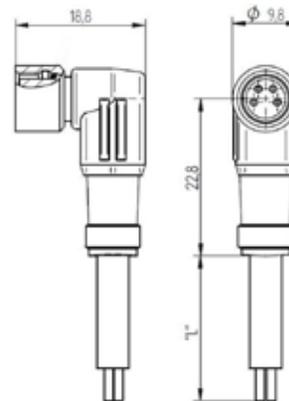


**Pin Assignments**

**M8**

**3 poles**



**4 poles**





**Cordsets  
Single-Ended**

## M8-Round-Plug Connector, Single-Ended Cordsets

RKMV 3 | RKMV 4 | RKMVW 3 | RKMVW 4

### Technical Data

#### Environmental

Degree of protection IP 67, IP68 (NEMA 6P)  
Operating temperature range -30 to +80C

#### Mechanical

Housing / Molded body TPU grey transparent  
Insert (contact bearer) PA/TPU, orange  
Contact Copper Alloy  
Coupling screw Nickel Plated Brass  
O-ring FKM

#### Electrical data

Rated voltage 63V (IEC) / 30V (UL)  
Rated current\* 4 A

### Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
294	PVC	22 AWG stranded	black	5.00 mm nominal
295	PVC	22 AWG stranded	black	5.20 mm nominal

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
<b>Female Straight</b>				
RKMV 3-294/...M	3	PVC	2M / 5M / 10M	
RKMV 4-295/...M	4	PVC	2M / 5M / 10M	