
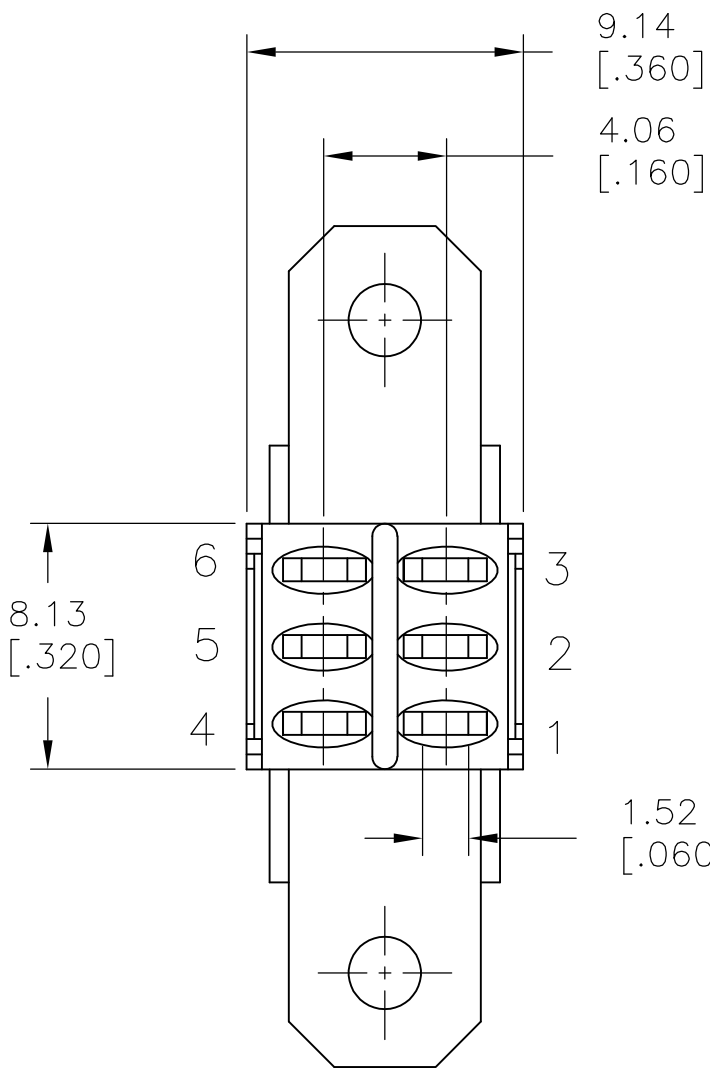
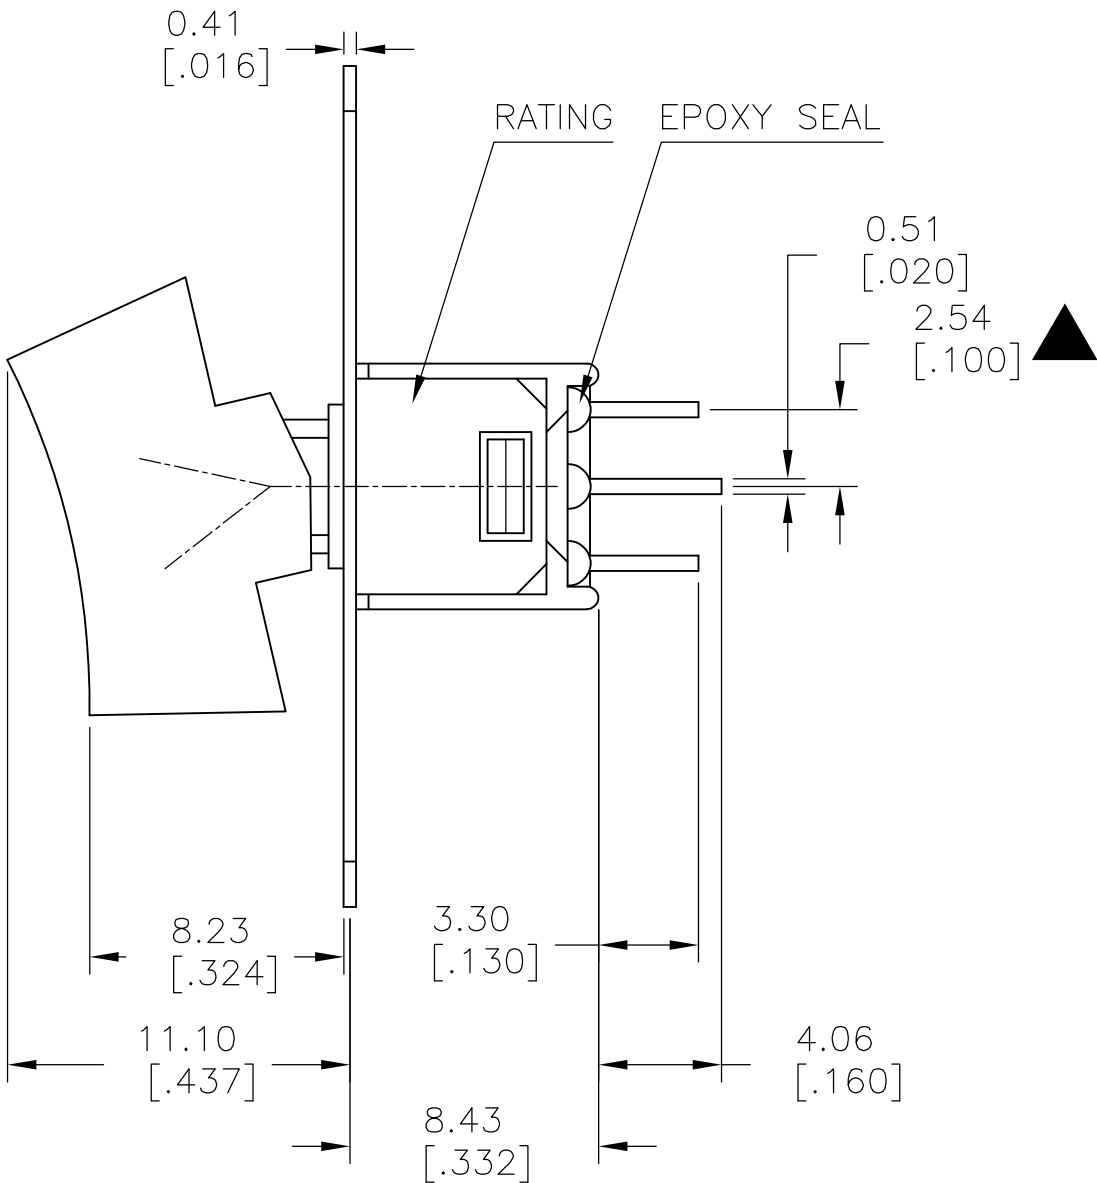


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
-	-	A		NEW DRAWING PER ECO-14-009318		11JUL2014	RH

SPECIFICATIONS

- MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR SILVER PLATED CONTACTS.
- CONTACT RATING: 3 Amps @120 VAC OR 28 VDC
1 Amp @ 250 VAC
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

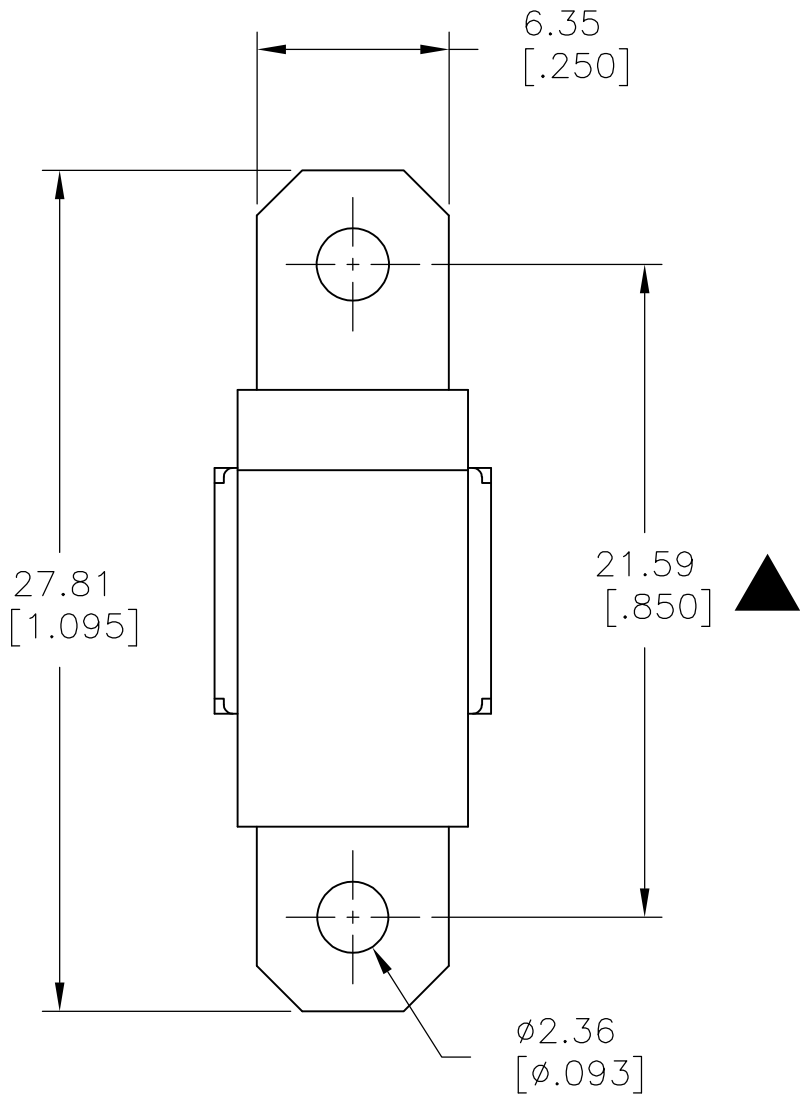

SILVER	2-1,5-4	2-3,5-6	ON-ON	V-BRACKET	VERTICAL	2	2	RMD1R102VS2QES	2267087-8
SILVER	2-1	2-3	ON-ON	V-BRACKET	VERTICAL	1	2	RMS1R102VS2QES	2267087-7
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	2	2	RMD1R102M7QES	2267087-6
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	1	2	RMS1R102M7QES	2267087-5
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	2	2	RMD1R102M6QES	2267087-4
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	1	2	RMS1R202M6QES	2267087-3
SILVER	2-1,5-4	2-3,5-6	ON-ON	SOLDER LUG	VERTICAL	2	2	RMD1R102M1QES	2267087-2
SILVER	2-1	2-3	ON-ON	SOLDER LUG	VERTICAL	1	2	RMS1R102M1QES	2267087-1
CONTACT MATERIAL	POS 2	POS 1	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

1



0

0



0

0

0

37

11

11



11



11





11

11

^





^

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

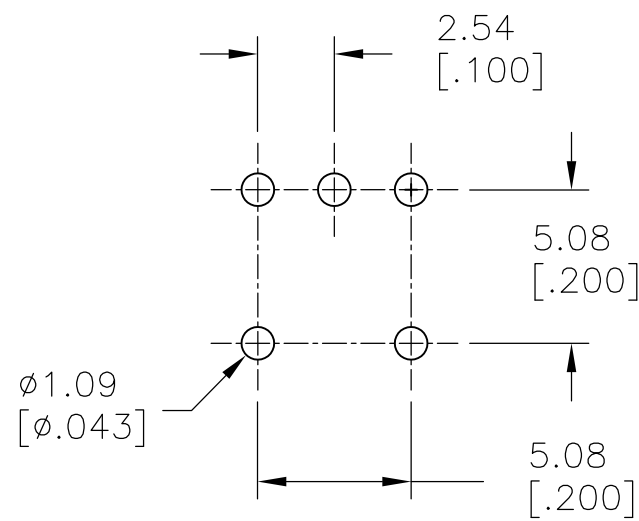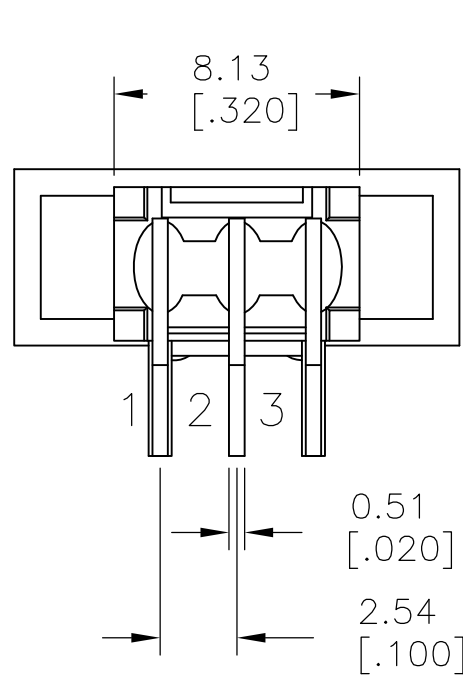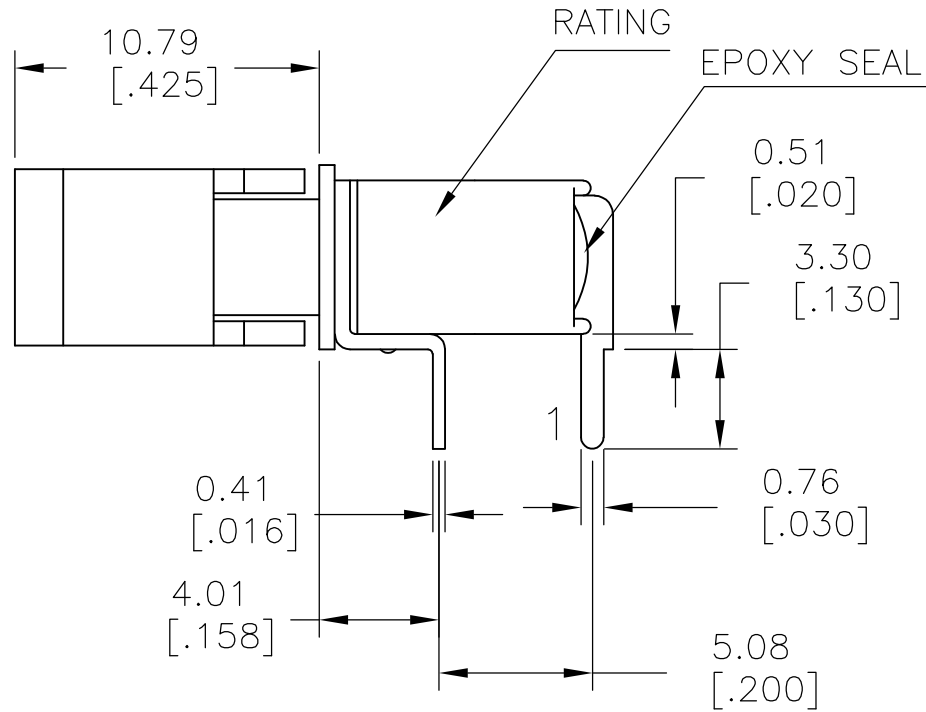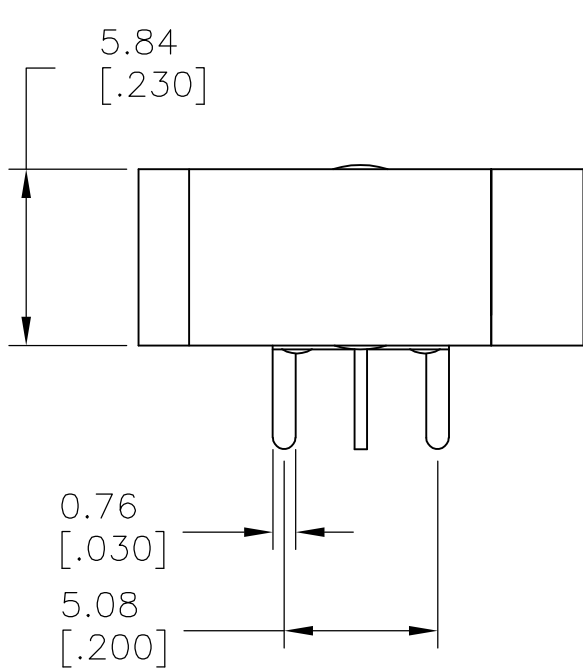

P.C. MOUNTING

SPDT M6
RIGHT ANGLE

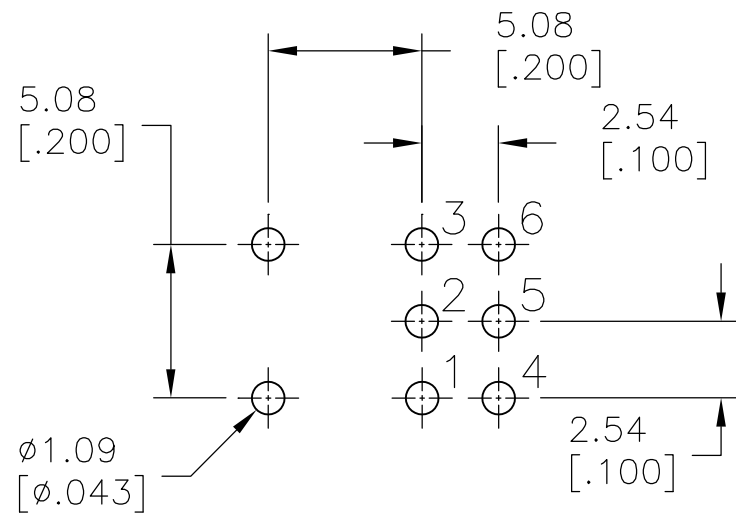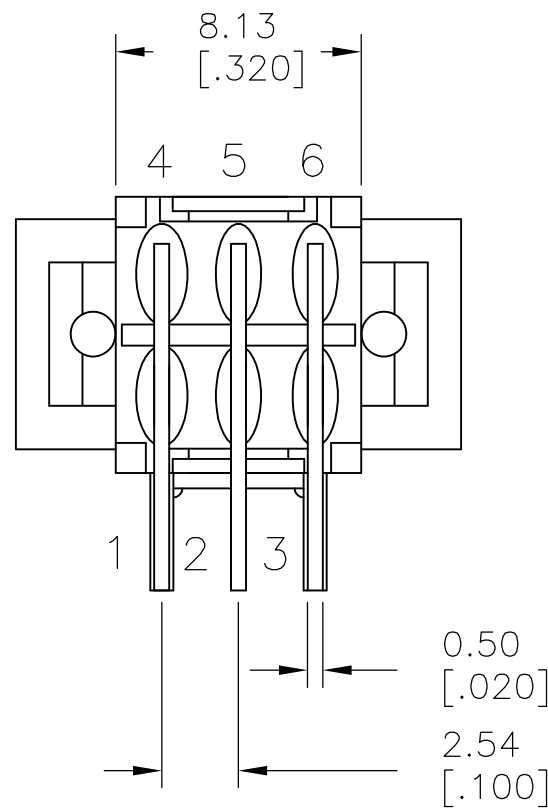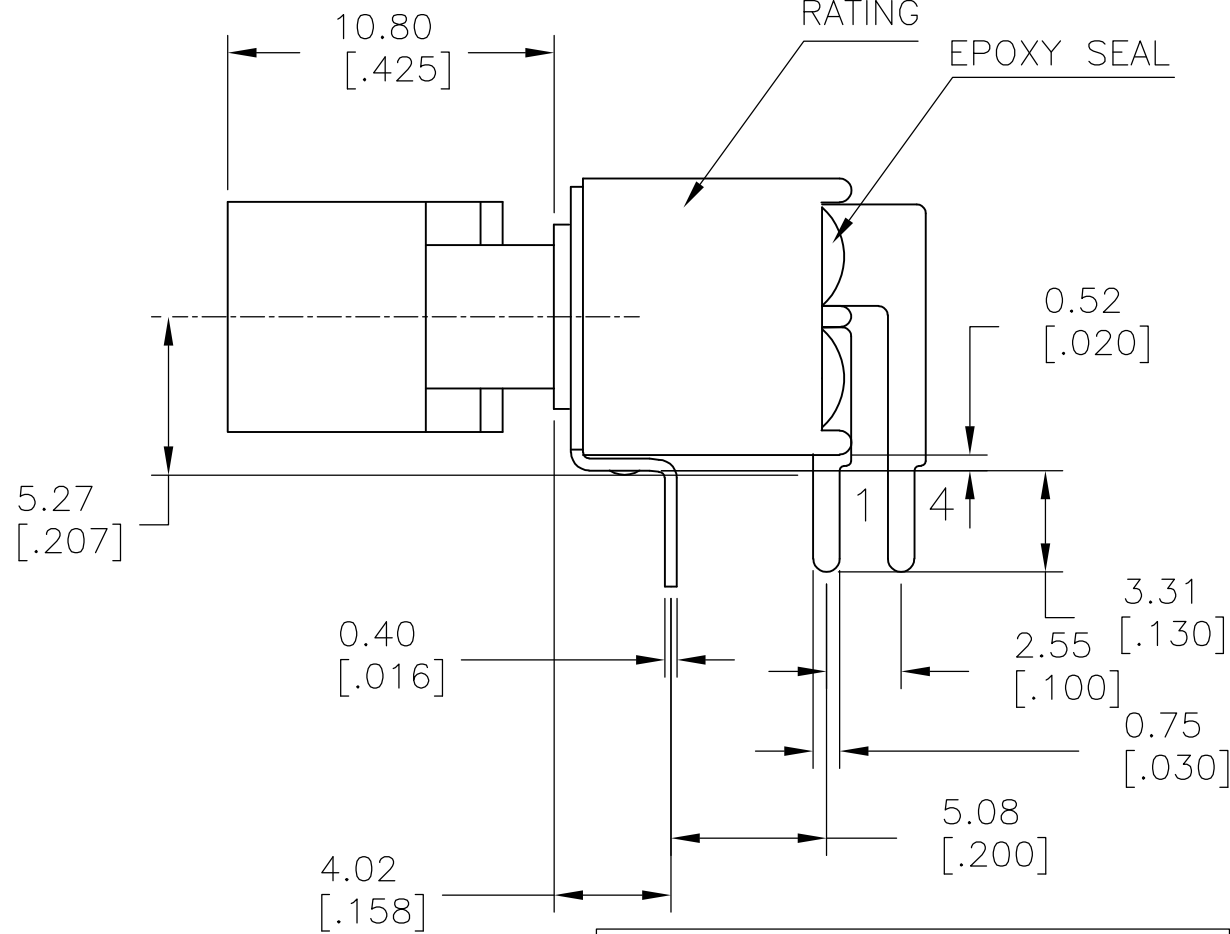
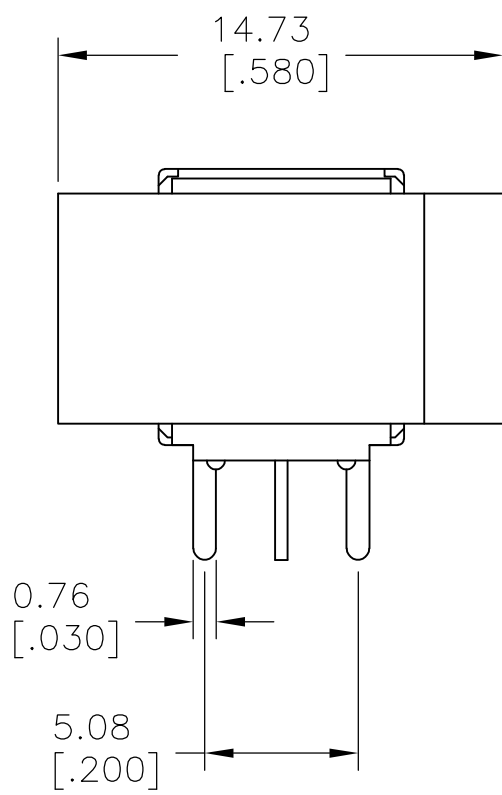


P.C. MOUNTING



DPDT M6
RIGHT ANGLE

LAYOUT FOR PN 2267087-3 & 4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL, RYAN 11JUL2014	NAME			
0 PLC ± -		PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES			
1 PLC ± 0.38 [.015]		APPLICATION SPEC	SIZE			
2 PLC ± 0.25 [.010]		—	CAGE CODE			
3 PLC ± -		—	DRAWING NO			
4 PLC ± -		—	RESTRICTED TO			
ANGLES ± 5°		—	A2 00779 C=2267087			
MATERIAL		WEIGHT	SCALE			
FINISH		—	3:1			
—		CUSTOMER DRAWING	SHEET			
—		—	3 of 5			
—		—	REV			
—		—	A			

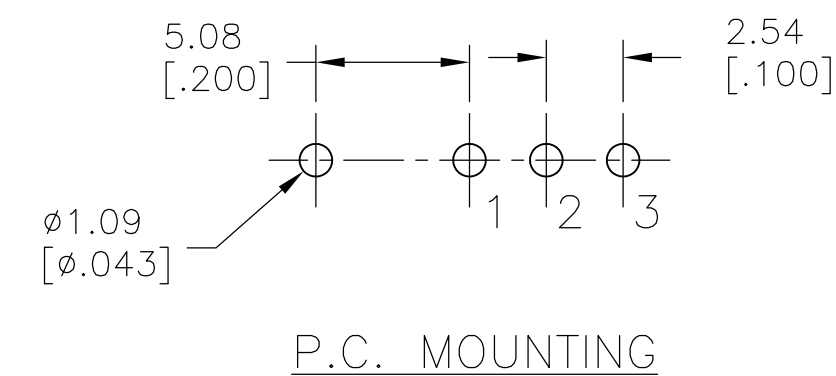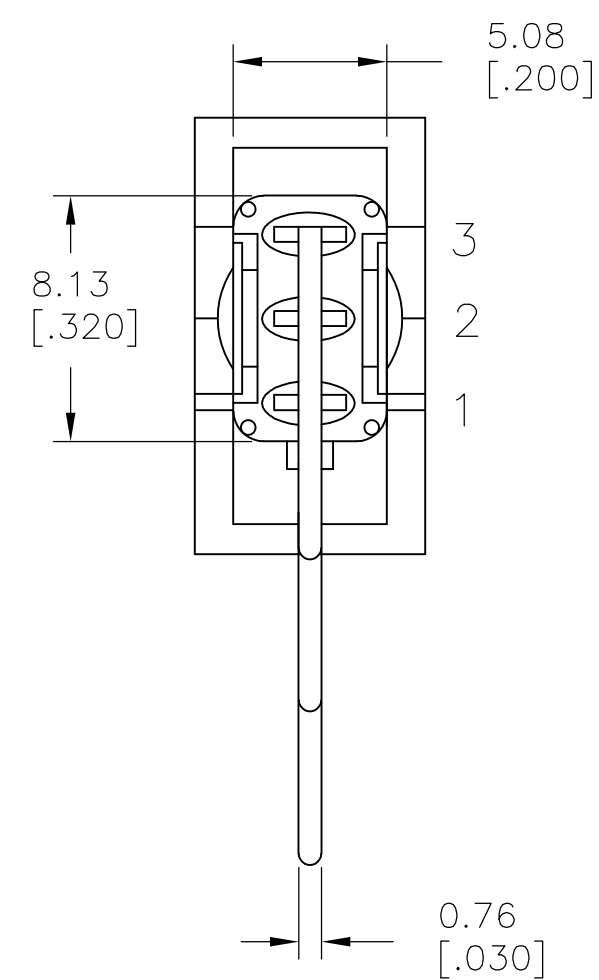

VERTICAL
RIGHT ANGLE

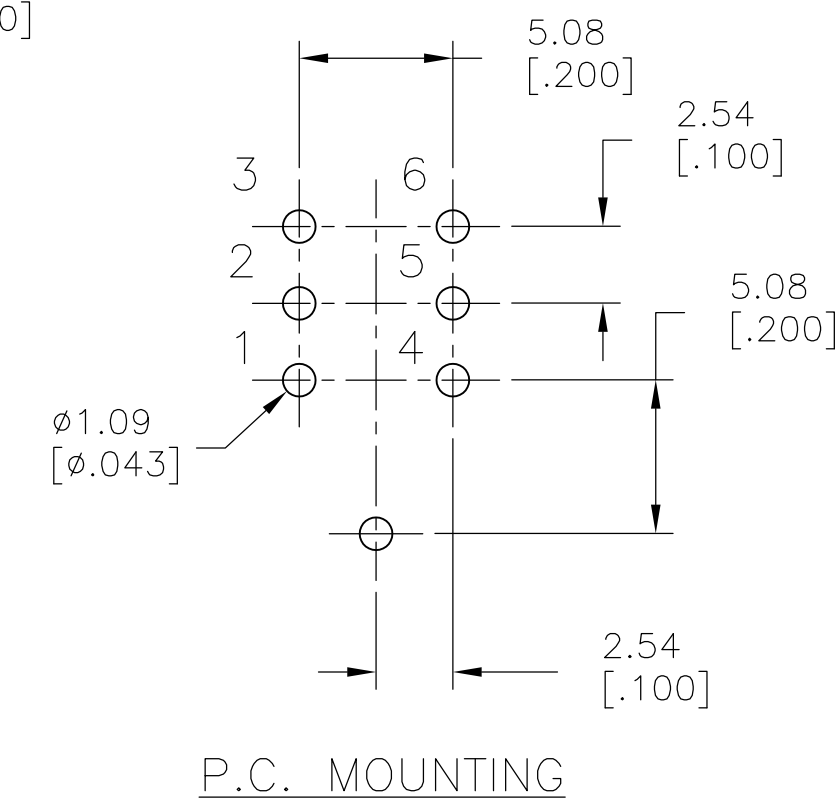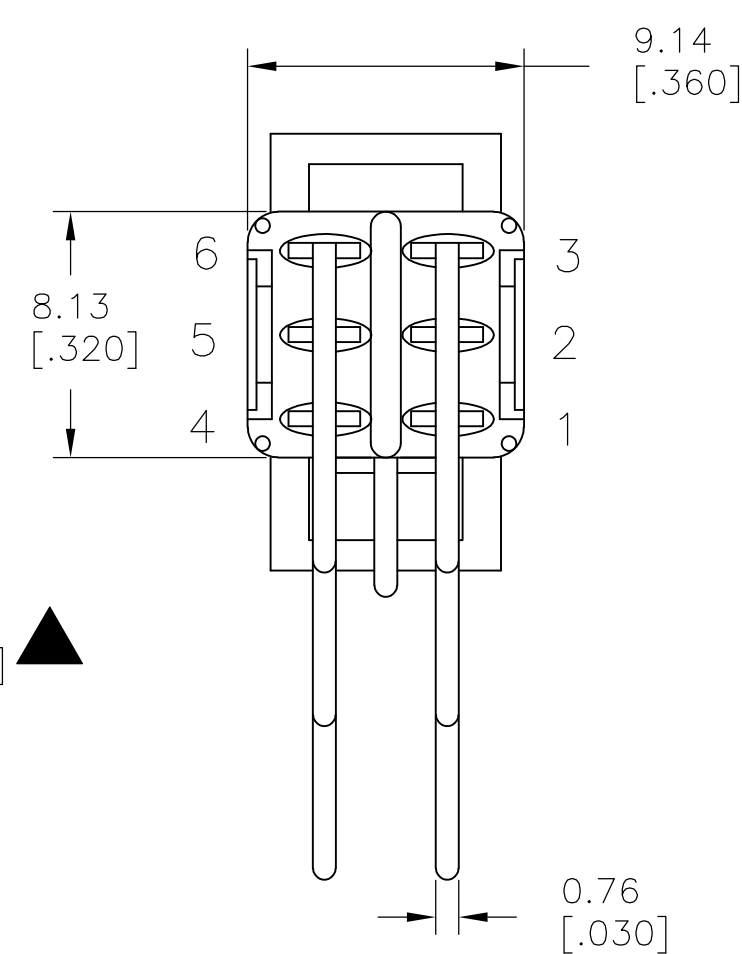




VERTICAL
RIGHT ANGLE

LAYOUT FOR PN 2267087-5 & 6

LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D

C

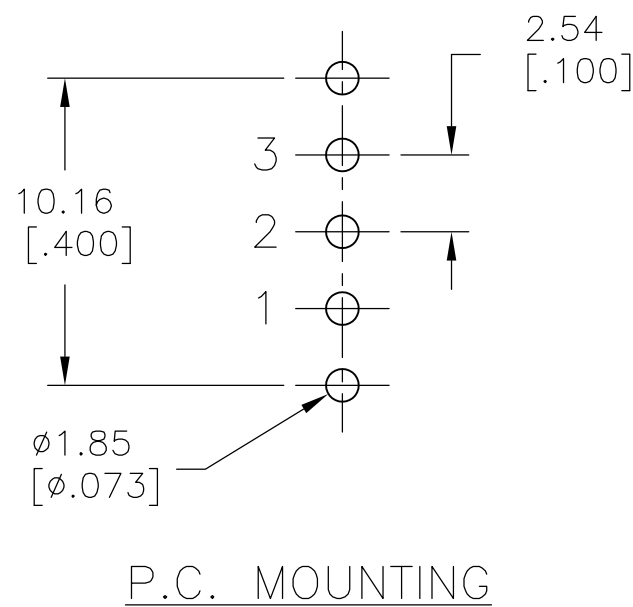
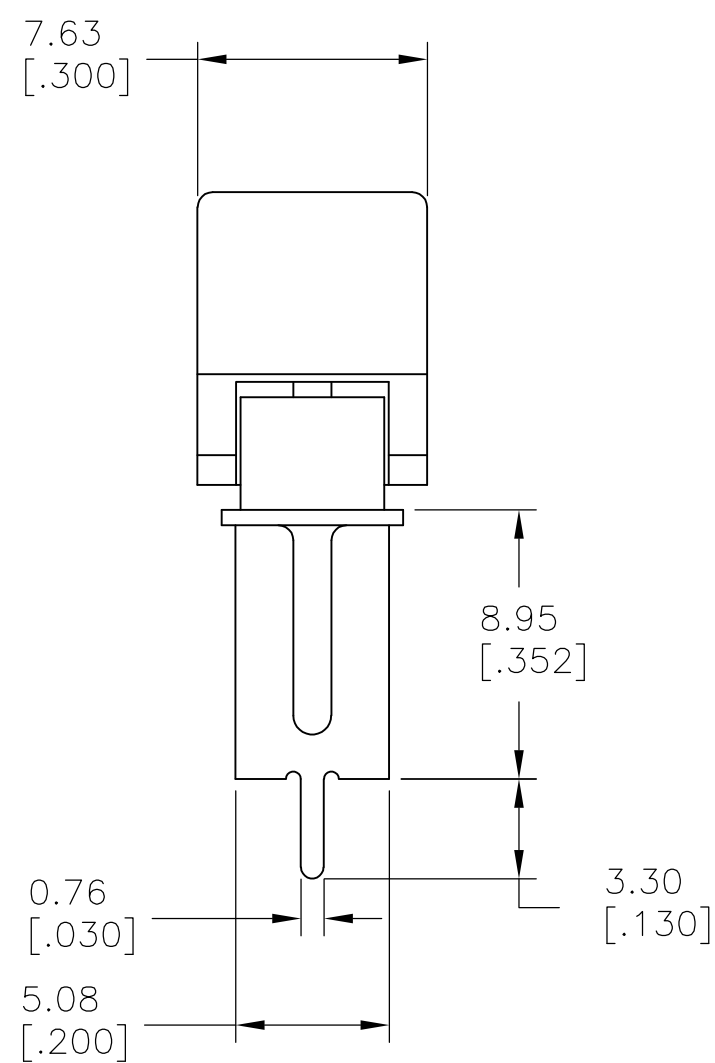
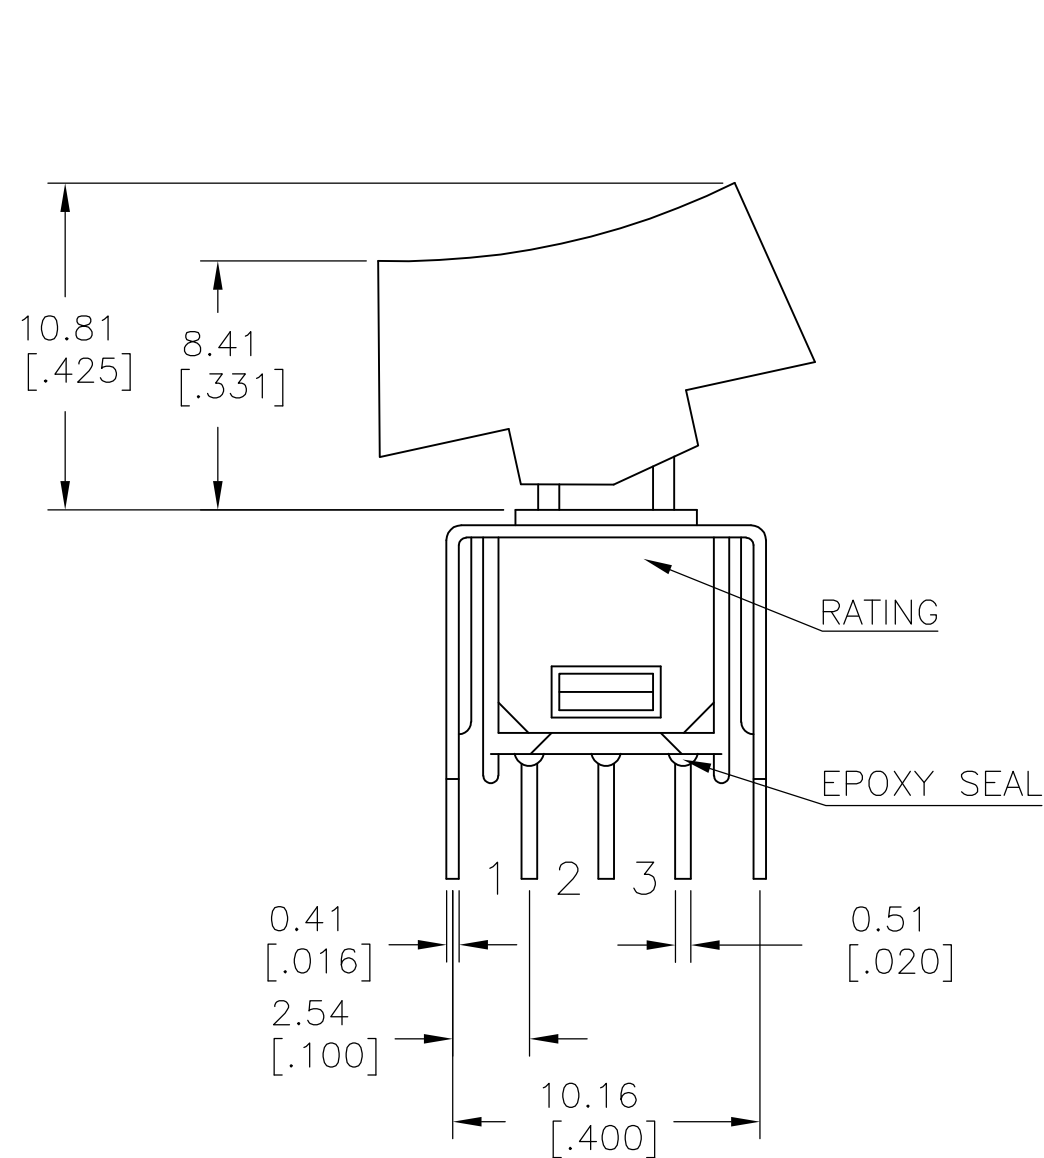


SPDT VS2

VERTICAL V-BRACKET

B

A

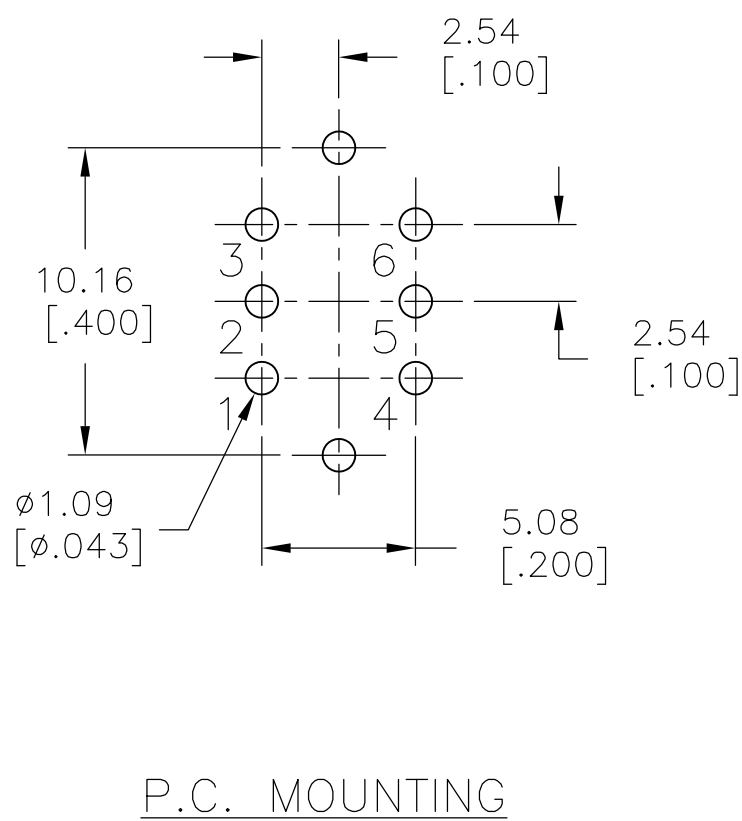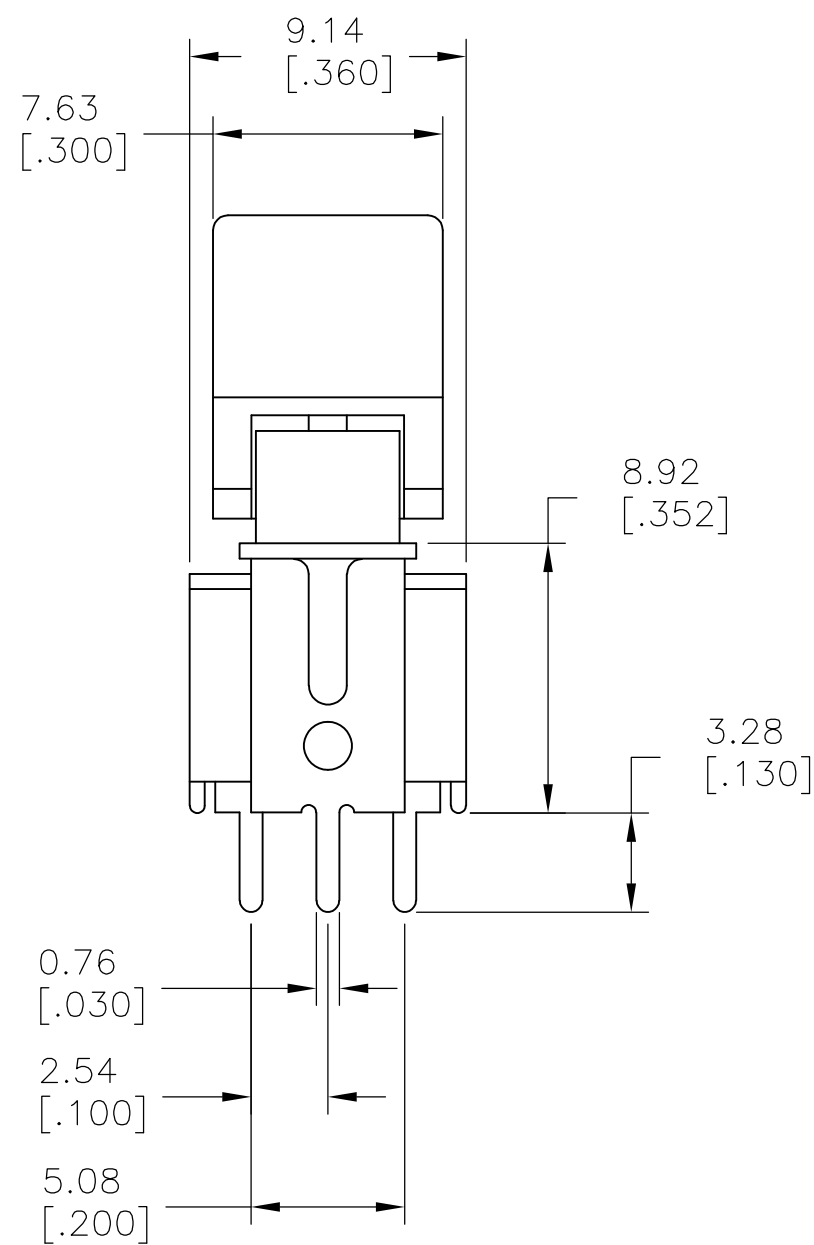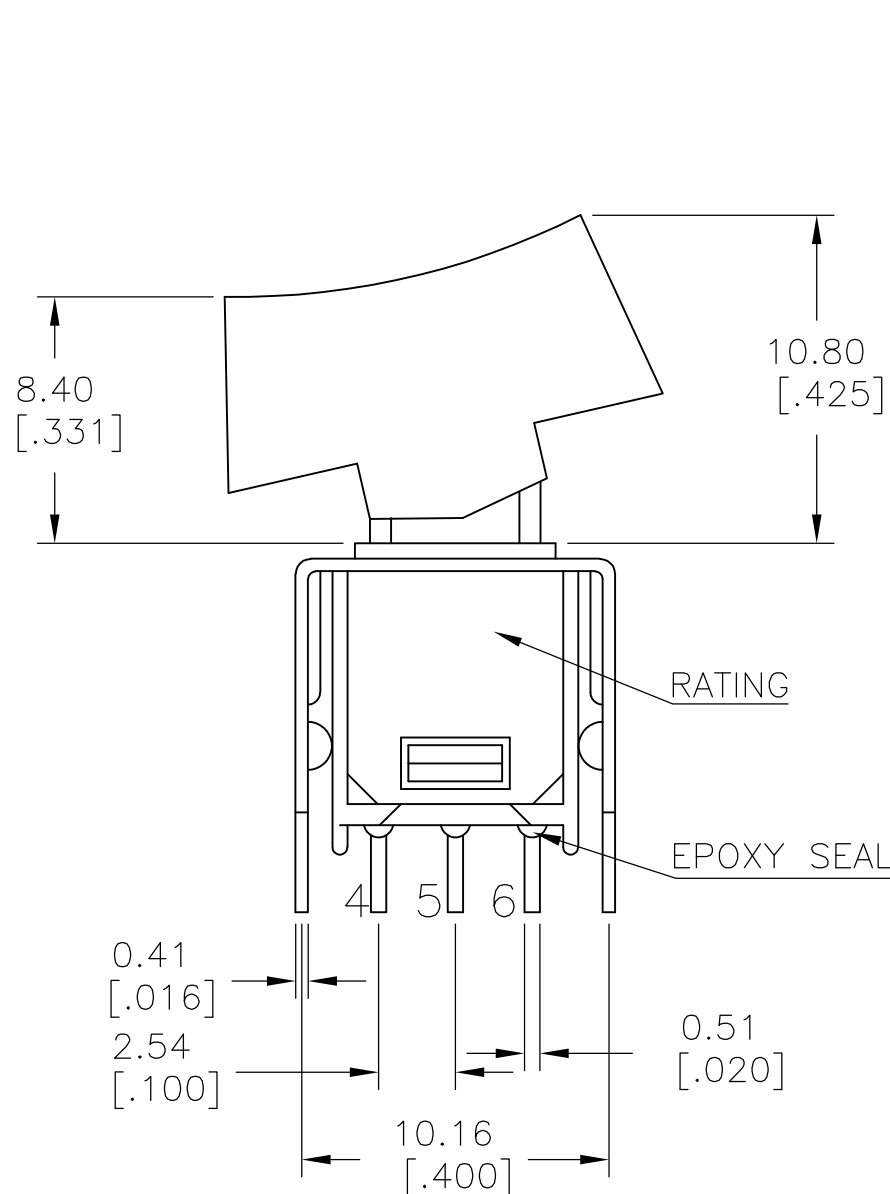

DPDT VS2

VERTICAL V-BRACKET

LAYOUT FOR PN 2267087-7 & 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	 TE Connectivity						
		CHK HILL, RYAN 11JUL2014							
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD HILL, RYAN 11JUL2014	NAME						
	0 PLC ± -	PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES						
	1 PLC ± 0.38[.015]	—							
	2 PLC ± 0.25[.010]	APPLICATION SPEC							
	3 PLC ± -	—							
	4 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	A2 00779 C=2267087				—		
—	—	CUSTOMER DRAWING	SCALE		3:1	SHEET	5 of 5	REV	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RMD1R102M1QES](#)