

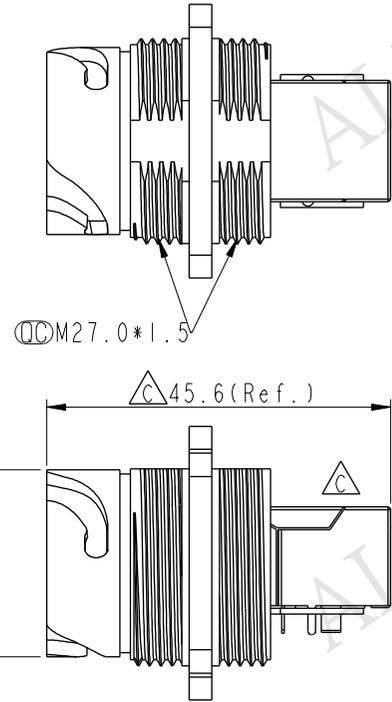
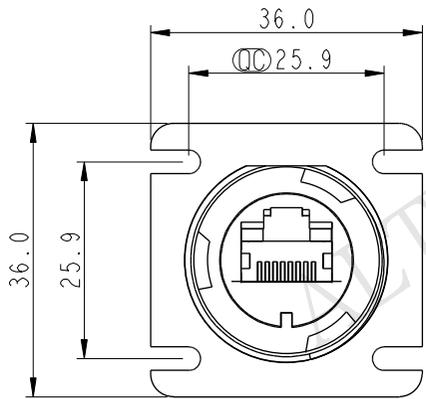
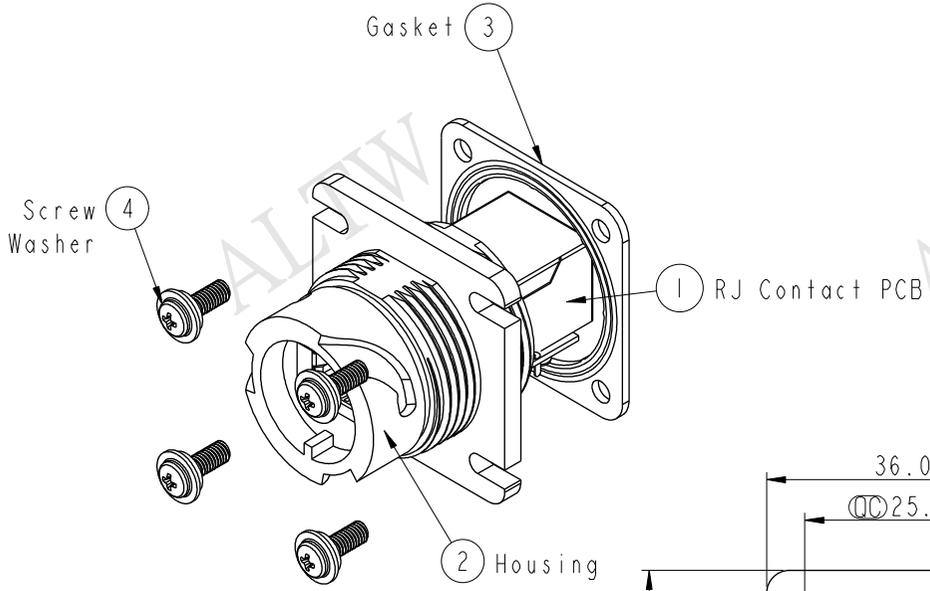


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1370009	2013-07-06	Cary	Change Note & Panel Cut-out
C	LEN13A0046	2013-10-15	Raison	Modify Jack and Note
D	LEN1610151	2016-01-08	Ruru	Change Note

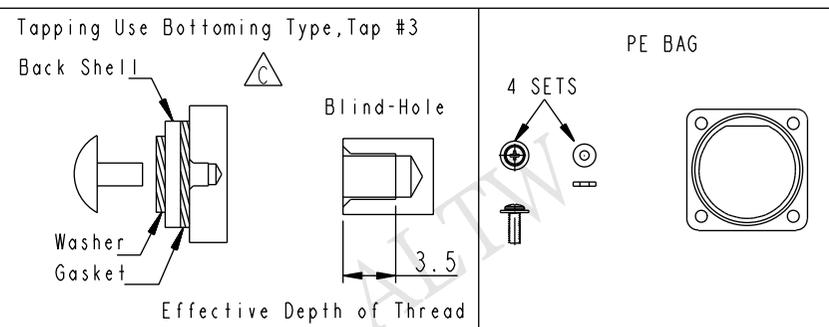

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.01.14
ISSUED

ALTW
CONFIDENTIAL
2016-01-08
R&D DEPT.

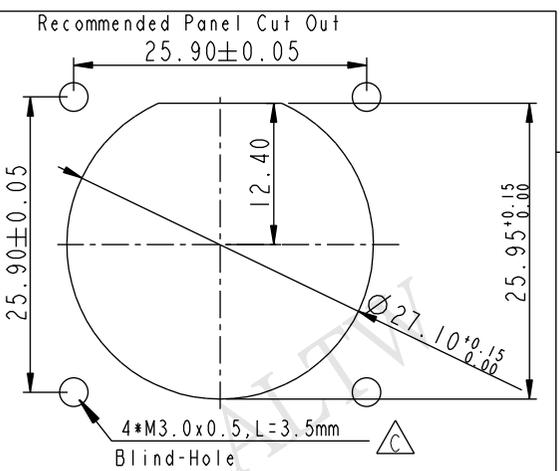

- Note:
- * \varnothing Important Dimension
 - * \triangle Waterproof Rate: IP67 Unmated
 - * Housing: Nylon+GF, BLACK
 - * RJ45 Jack: Cat 5e, Shield
 - * \triangle Gasket: Silicone, UL 94V-0, Black
 - * Screw: M3.0x L=8.0mm
 - * Contact: Phosphor Bronze, Gold Flash
 - * \triangle Screw torsion value range: 1.5~2kgf-cm
 - * \triangle Temperature Range: -40°C to 105°C
 - * \triangle All Parts Should Meet RoHS Compliant

UNIT: mm		
TOLERANCE	.X ±0.25	
.XX ±0.1		
.XXX ±0.05		
ANGLES	±1°	

TITLE RJ45 ODVA, DOUBLE LOCK Unmated Waterproof			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. B.4	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. ROP-5SDFFH-TSU7001	DRAWN BY Ruru	DATE 2016-01-08
DWG NO. ROP-5SDFFH-TSU7001	CHECKED BY Rita	DATE 2016-01-08
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-01-08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.