


## Data Sheet

# Radial Lead Type Monolithic Ceramic Capacitors

## RPE Series (DC25V-DC100V)

**RPE5C1H220J2K1Z03B (C0G, 22pF, DC50V)**

## RoHS regulation conformity parts

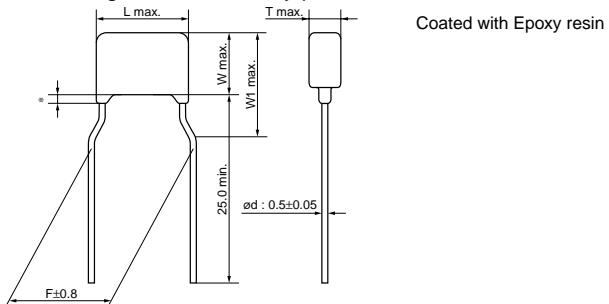

\* Coating extension does not exceed the end of the lead bend.  
 - Lead Wire : Solder Coated Copper Wire or  
 Solder Coated CP Wire  
 (in mm)

### Dimensions

Length L	5.0mm max.
Width W	3.5mm max.
Thickness T	2.5mm max.
Lead Spacing F	5.0mm $\pm$ 0.8mm
Lead Diameter d	0.5mm $\pm$ 0.05mm
Size W1	5.0mm max.

### Rated Value

	Murata PN Code	Spec
Temperature Char.	<b>5C</b>	C0G, 0 $\pm$ 30ppm/ $^{\circ}$ C
Capacitance	<b>220</b>	22pF
Capacitance Tol.	<b>J</b>	$\pm$ 5%
Rated Voltage	<b>1H</b>	DC50V

### Lead Style

Code	Lead Style
<b>K1</b>	Inside Crimp

### Packaging

Code	Packaging	Minimum Quantity
<b>B</b>	Bulk	500

### Specifications

Please refer to  
 'RPE Series Specifications and Test Methods'  
 PDF file.

● This data sheet is applied for RADIAL LEAD TYPE MONOLITHIC CERAMIC CAPACITOR used for General Electronics equipment for your design.

#### <Notice>

- Bonding, resin molding and coating  
 In case of bonding, molding or coating this product, verify that these processes do not affect the quality of capacitor by testing the performance of the bonded, molded or coated product in the intended equipment. The variation in thickness of adhesive or molding resin or coating may cause an outer coating resin cracking and/or ceramic element cracking of a capacitor in a temperature cycling.
- Please refer to 'Caution' and 'Notice' for the other details.

- The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.
- This statement does not insure the compliance of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.