

Datasheet

RS 25 Core Unscreened Industrial Cable, PVC Sheath, 5.8mm OD, 0.055 mm² CSA 0.25 A, 25m

RS Stock number 660-4005

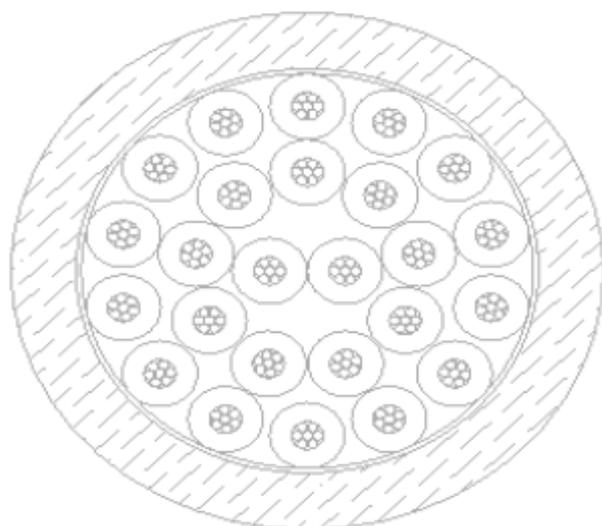


Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω/Km) :
<384

Min.Insulation DC Resistance at 20°C (MΩ*KM) :
>200

Current Rating : 0.25 A

**Description:****Rated Temperature (°C):** -20 ~ 80**Rated Voltage (V):** 250**Flammability Test:** IEC60332-1**Standard:****Manufacture to Def. Stan 61.12 Part 4 & 5****Construction:****Conductor:** Tinned Copper**Conductor Dia. (mm):** $0.10 \pm 0.008 \times 7$ **Insulation:** PVC**Insulation Dia. (mm):** $0.7 \pm 0.05 \times 25C$ **Tape:** Mylar Spiral**Coverage:** $\geq 115\%$ **ID Thread:** Green, White/Green**A rip cord :** 210 D**Jacket:** FR-PVC**Outer Dia. (mm):** 5.5 ± 0.1