

## RT50LL9C2


Releasable Cable Tie, 50lb. 15" Max. Bun. Dia 3.98" PA66, Natural, 100/pk

Article Number: 115-06102

Part Number: RT50LL9C2

Type: RT50LL

Material: PA66

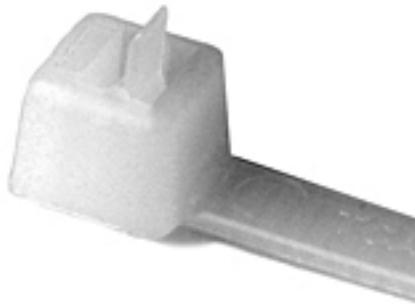


### 1. Base Data

---

<b>Part No.</b>	RT50LL9C2
<b>Type</b>	RT50LL
<b>Color</b>	Natural
<b>Features</b>	The extended pawl allows for simple and quick release of the ties.
<b>Application</b>	Perfect for prototype construction and service requiring the addition of wire on existing harnesses.

## 2. Product Dimensions

---

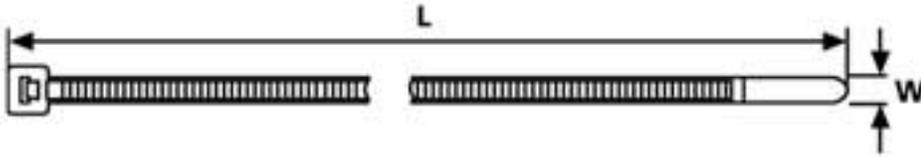

<b>Min. Tensile Strength</b>	50 lbs / 225 N
<b>Length (L)</b>	15 " / 380 mm
<b>Width (W)</b>	.18 " / 4.6 mm
<b>Min. Ø Bundle</b>	.06 " / 1.5 mm
<b>Max. Ø Bundle</b>	3.98 " / 101 mm

## 4. Material and Specifications

---

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL94 V2
<b>Operating Temperature</b>	-40 °F to +185 °F (-40 °C to +85 °C) continuous
<b>ROHS Conformity</b>	

## Logistic and Packaging

---

<b>Packaging Type</b>	bag
<b>Pkg. Qty.</b>	100
<b>Carton Qty.</b>	5000

**UPC**

08930604494

**Miscellaneous**


---

**UL Recognized (US and Canada)** Yes

## Releasable Ties

The extended pawl allows for simple and quick release of the ties. Perfect for prototype construction and service requiring the addition of wires on existing harnesses.

Material Data	
Material	<b>Polyamide 6.6 (PA66)</b>
Operating Temperature	<b>-40 °F to +185 °F</b> <b>(-40 °C to +85 °C) continuous</b>
Flammability	<b>UL94 V2</b>



RT40R



RT50S and RT50LL

**CALUS**  
File# E64139

Product Selection			Min. Tensile Strength	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type						
<b>RT40R</b>								
115-06219	<b>RT40R9C2</b>	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)	Natural	100
115-06204	<b>RT40R9M4</b>	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)		1000
115-06200	<b>RT40R0C2</b>	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)	Black	100
115-06202	<b>RT40R0M4</b>	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)		1000
<b>RT50S</b>								
115-06319	<b>RT50S9C2</b>	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)	Natural	100
115-06304	<b>RT50S9M4</b>	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)		1000
115-06300	<b>RT50S0C2</b>	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)	Black	100
115-00035	<b>RT50S0M4</b>	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)		1000
<b>RT50LL</b>								
115-06102	<b>RT50LL9C2</b>	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)	Natural	100
115-06104	<b>RT50LL9M4</b>	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)		1000
115-00039	<b>RT50LL0C2</b>	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)	Black	100
115-06101	<b>RT50LL0M4</b>	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)		1000

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.