

RTE Series


Low Profile Rotary DIP Switches

Features/Benefits

- Thru-hole and surface mount models
- Miniature size with robust stainless steel cover
- Rotary SPDT, SP3T, SP4T functions
- Rotary binary-decimal and hexadecimal coding
- RoHS compliant

Typical Applications

- Timers, automation components
- Computer and peripherals
- Alarms, access control
- Instrumentation

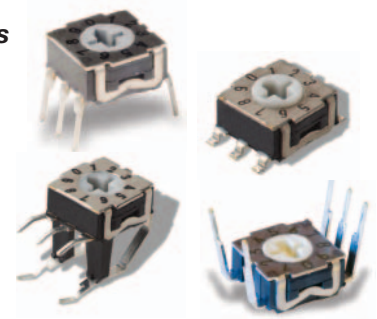

H

DIP

Specifications

CONTACT RATING:

Gold: 100 mA max. 10 μ A min. 30 V DC max. 20 mVDC min.

Silver: 100 mA max. 1 mA min. 50 V DC max. 2 VDC min.

MECHANICAL LIFE: RTE02/03: 1,500 actuations; RTE04/10/16: 20,000 actuations

CONTACT RESISTANCE: 100 m Ω max. initial; 150 m Ω after life

INSULATION RESISTANCE: RTE02/03: 10¹⁰ Ω min.

RTE04/10/16: 10¹⁰ Ω min. initial

DIELECTRIC STRENGTH: RTE 02/03: 500 Vrms; RTE 10/16; 300 Vrms

OPERATING TEMPERATURE: -25°C to 85°C.

STORAGE TEMPERATURE: -40°C to 85°C.

PACKAGING: N or R terminations in tube.

V termination in box. G termination in reel, 750 pieces per reel.

G termination with flush actuator, 1250 pieces per reel.

Materials

COVER & BASE: Thermoplastic PPS

ACTUATOR: LCP

KNOB: Thermoplastic

MOVABLE CONTACTS: Brass, gold or silver plated.

STATIONARY CONTACTS: Brass, gold or silver plated.

TERMINALS: See page I-25 to I-26

O-RING: Silicone

Note: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Solderability: Wave soldering 260°/2s.

SMT are reflow compatible according to CECC 00802-NORM.

How To Order

Our easy Build-A Switch concept allows you to mix and match options to create the switch you need. Below is a complete listing of options shown in catalog. To order, simply select desired option from each category and place in the appropriate box.

NOTE: Some of the configurations may not be available or could require some development.

RTE											
Number of Positions		ESD Protection and top plate		Actuator		Terminations		Switch Function		Contact/terminal Material	
RTE02 ¹		0 Without ESD - standard plate		0 Flush, screwdriver slot		N Thru-hole		0 Single pole ^{3,1}		4 Gold/Matte-tin	
RTE03 ¹		1 With ESD - standard plate ⁴		1 Extended shaft ^{2,5}		V Right angle ⁷		1 BCD code		5 Silver/Matte-tin ¹³	
RTE04 ²		B Without ESD - black plate		2 Shaft for button ^{2,5,6}		G Surface mount		2 BCD complement code ⁹			
² RTE10 ³						M Manual ⁸		3 Grey Code ¹⁰			
² RTE16 ³						R Reverse, thru-hole		4 Hexadecimal code ¹¹			
								7 Grey Code ¹²			

1 - RTE02/RTE03 available with single pole function "0" only

2 - RTE04 version only available with screwdriver slot actuator "0"

3 - Single pole function not available for RTE10/RTE16

4 - ESD protection available with "N" thru-hole termination only

5 - Not available in surface mount

6 - Buttons ordered separately

7 - Not available for RTE02/RTE03

8 - Manual - available for RTE03 and RTE10/RTE16 with actuator option "2" only

9 - BCD complement code for RTE10, not available with terminations "G" & "M"

10 - Grey Code - for RTE10 only

11 - Hexidecimal code for RTE16 only

12 - Grey code for RTE04/RTE16 only

13 - Silver contact option only available for RTE02/RTE03



Third Angle
Projection




RTE Series

Low Profile Rotary DIP Switches

SWITCHES WITH STANDARD OPTIONS


PC Mount-Terminal Option N

PART NUMBER WITHOUT ESD PIN	WITH ESD PIN	NO. POS.	FUNCTION	QTY PER TUBE
RTE0200N04	RTE0210N04	2	SPDT	65
RTE0300N04	RTE0310N04	3	SP3T	65
RTE0400N04	RTE0410N04	4	SP4T	65
RTE1000N14	RTE1010N14	10	BCD	65
RTE1600N44	RTE1610N44	10	HEXADECIMAL	65

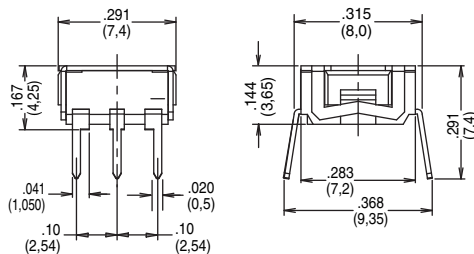



Right Angle Mount-Terminal Option V

PART NUMBER	NO. POS.	FUNCTION	QUANTITY
RTE0400V04	4	SP4T	150 per box
RTE1000V14	10	BCD	150 per box
RTE1600V44	16	HEXADECIMAL	150 per box

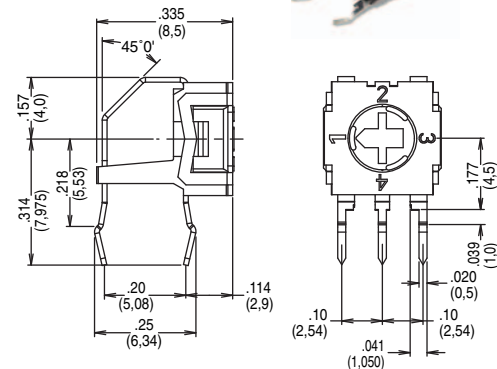

Surface Mount-Terminal Option G

PART NUMBER	NO. POS.	FUNCTION	QUANTITY PER REEL
RTE0200G04	02	SPDT	1250
RTE0300G04	03	SPDT	1250
RTE0400G04	04	SP4T	1250
RTE1000G14	10	BCD	1250
RTE1600G44	16	HEXADECIMAL	1250

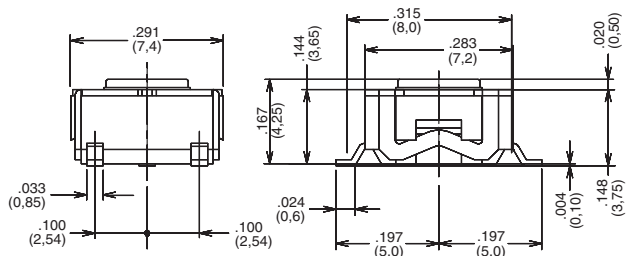

Third Angle
Projection




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change


RTE Series Low Profile Rotary DIP Switches

NUMBER OF POSITIONS


RTE02* 2 POSITION




RTE03 3 POSITION




RTE04 4 POSITION



RTE10 10 POSITION




RTE16 16 POSITION




ESD PROTECTION

0 WITHOUT

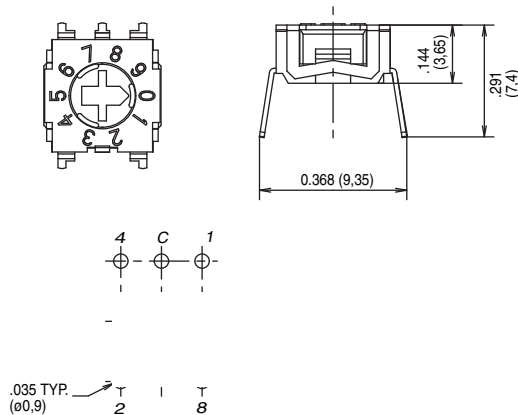


1 WITH

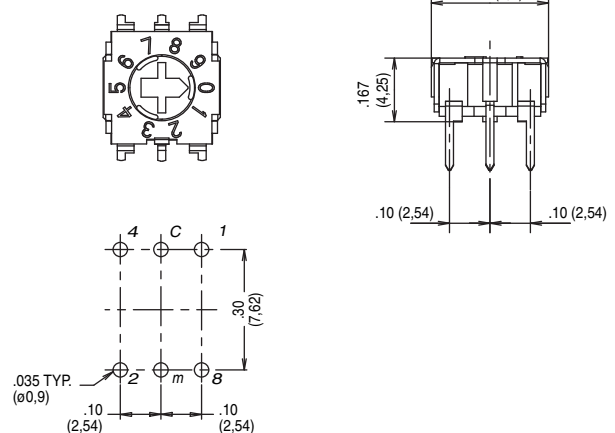


ACTUATOR



0 FLUSH, SCREWDRIVER SLOT

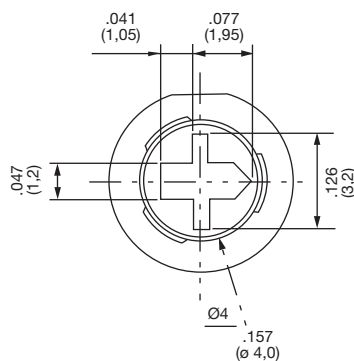

1 EXTENDED SHAFT
(not available in surface mount)



2 SHAFT FOR BUTTON



Third Angle
Projection




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

RTE Series


Low Profile Rotary DIP Switches

TERMINATIONS


N THRU-HOLE

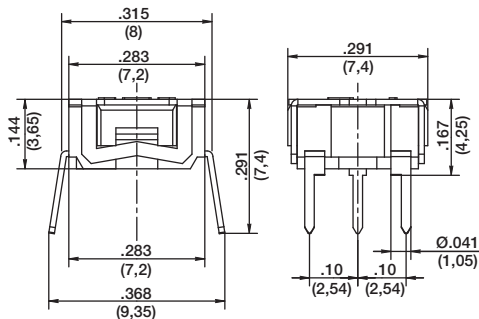


RTE10, RTE 04 or RTE16
with ground terminal




RTE10, RTE 04 or RTE16
without ground terminal




RTE02 with
ground terminal




RTE02 without
ground terminal



RTE03 with
ground terminal




RTE03 without
ground terminal




Ø in PC Board for screw driver operation must be 3.5 mm


R REVERSE, THRU-HOLE

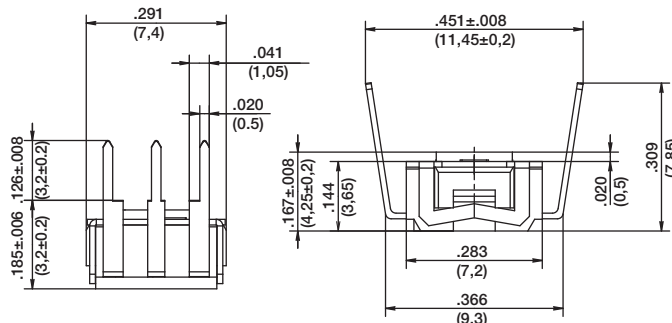


RTE10, RTE 04 or RTE16
with ground terminal




RTE10, RTE 04 or RTE16
without ground terminal




RTE02 with
ground terminal




RTE02 without
ground terminal



RTE03 with
ground terminal



RTE03 without
ground terminal



Ø in PC Board for screw driver operation must be 3.5 mm




Third Angle
Projection


RTE Series Low Profile Rotary DIP Switches

TERMINATIONS

V RIGHT ANGLE, THRU-HOLE

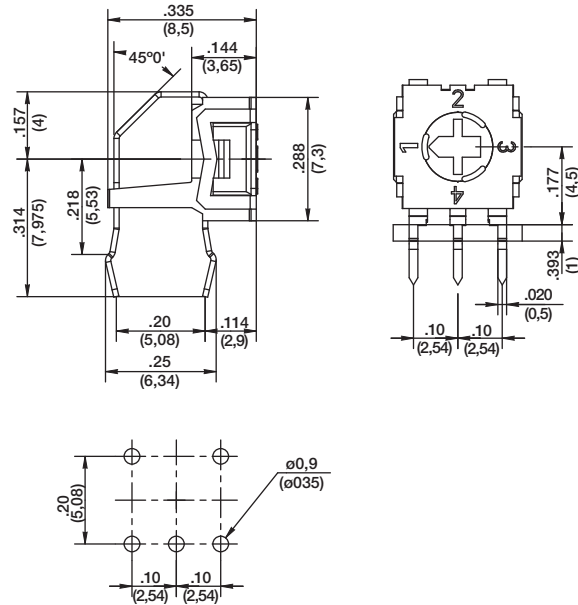


G SURFACE MOUNT

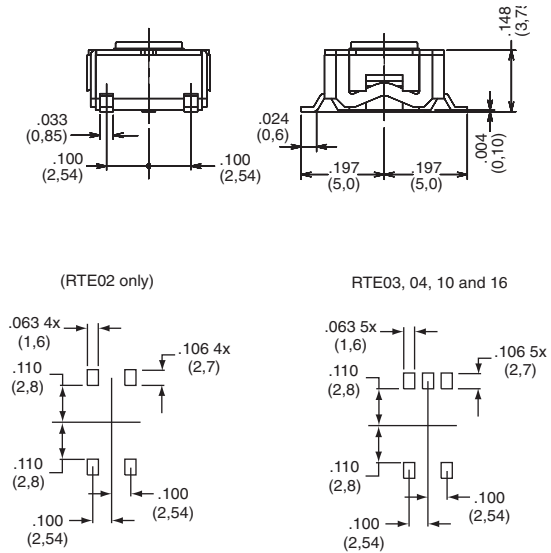

PCB layout seen component side

M OPTION

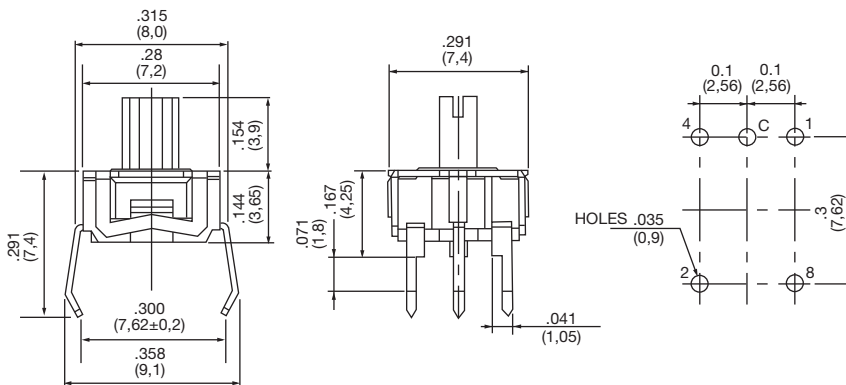

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



RTE Series

Low Profile Rotary DIP Switches



DIP

SWITCH FUNCTION

0 SINGLE POLE

POS.	1	2	3	4
C	●	●	●	●
1	●			
2		●		
3			●	
4				●

1 BCD CODE

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1		●		●		●		●		●
2			●	●			●	●		
4					●	●	●	●		
8									●	●

2 BCD COMPLEMENT CODE

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1	●		●		●		●		●	
2	●	●			●	●			●	●
4	●	●	●	●						●
8	●	●	●	●	●	●	●			

Other codes available by request.

3 GREY CODE (for RTE10 only)

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1		●	●			●	●			●
2				●	●	●	●			
4					●	●	●	●	●	●
8									●	●

4 HEXADECIMAL CODE

POS.	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1		●		●		●		●		●		●		●		●
2			●	●			●	●			●	●			●	●
4					●	●	●	●					●	●	●	●
8									●	●	●	●	●	●	●	●

7 GREY CODE (for RTE04 and RTE16 only)

POS.	1	2	3	4
C	●	●	●	●
1	●			
2		●		
4			●	
8				●

POS.	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1		●	●			●				●	●			●	●	
2			●	●							●	●	●			
4					●	●	●	●			●	●	●			
8									●	●	●	●	●	●	●	●

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT *	RoHS COMPATIBLE *	CONTACT MATERIAL	TERMINAL PLATING	RATINGS		
*4	YES	YES **	GOLD	MATTE TIN	100 mA max.	10µ A min.	30 V DC max.
*5	YES	YES **	SILVER	MATTE TIN	100 mA max.	1 mA min.	50 V DC max.

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

** When selecting contact material option 4 and 5 with RTE02, RTE03 and or “V” terminations, these combinations are RoHS compliant but not currently compatible (i.e. they do not sustain the high temperatures of the leadfree soldering process). All other options and terminations are RoHS compatible. Please contact customer service for RoHS compatible versions of the RTE02 and RTE03.



Third Angle Projection

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change






RTE Series Low Profile Rotary DIP Switches

BUTTONS AVAILABLE

Buttons are ordered separately, shipped in bulk.


Part Number **Color**

BTN RTE 40	Red
BTN RTE 50	Green
BTN RTE 90	Black

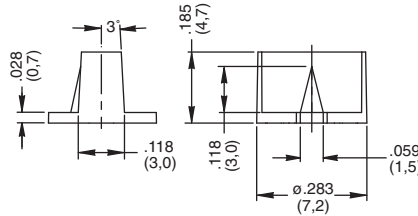


TAPE AND REEL

Tape and reel for RTExx02Gxx
750 pieces per reel.

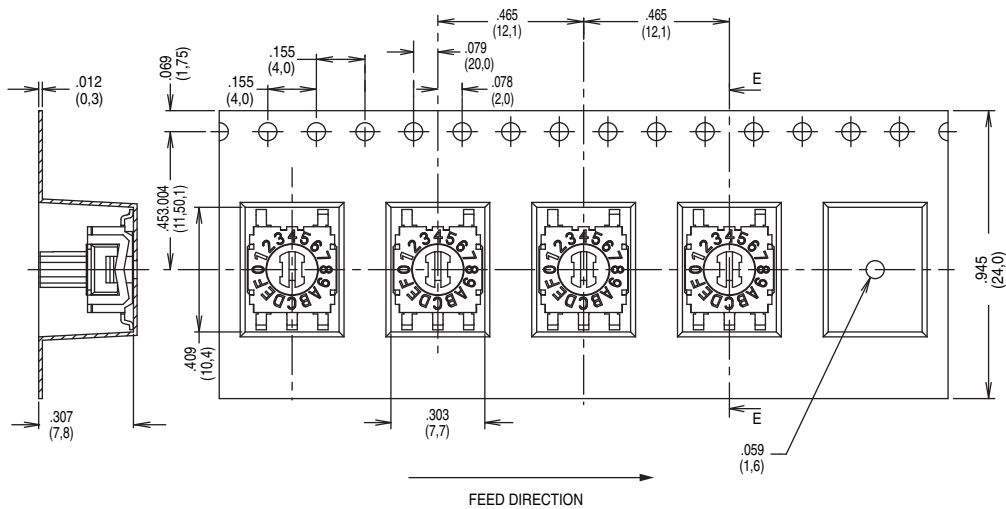

Tape and reel for RTExx00Gxx
1,250 pieces per reel.

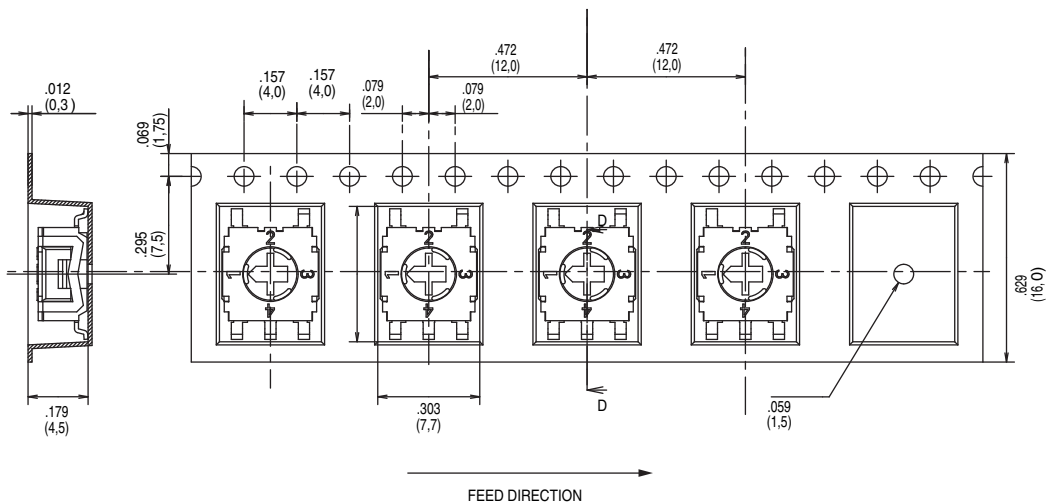

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

RTE0310N04	RTE0400N04	RTE1000G14	RTE1600G44	RTE1600N44	RTE1600V44	RTE1610N44	RTE0200R05
RTE0201R04	RTE0201R05	RTE0210N05	RTE0210R04	RTE0210R05	RTE0211N04	RTE0211N05	RTE0211R04
RTE0211R05	RTE0212N04	RTE0212N05	RTE0300R05	RTE0301R04	RTE0301R05	RTE0310N05	RTE0310R04
RTE0310R05	RTE0311N04	RTE0311N05	RTE0311R04	RTE0311R05	RTE0312N04	RTE0312N05	RTE0400V04
RTE1000R24	RTE1000V24	RTE1001R14	RTE1002G14	RTE1002V14	RTE1010N24	RTE1010R14	RTE1010R24
RTE1011N14	RTE1011N24	RTE1011R14	RTE1011R24	RTE1012N14	RTE1012N24	RTE1601R44	RTE1602V44
RTE1610R44	RTE1611N44	RTE1611R44	RTE1612N44	BTNRTE40	BTNRTE50	BTNRTE90	RTE0200G01