

Power PCB Relay RT1 Inrush Power

- 1 pole 16 A, 1 NO contact (W pre-make contact + AgSnO₂)
- 10 A / 250 VAC making and breaking capacity acc. to IEC 60669-1
- 165 A / 20 ms inrush peak current
- Mono- or bistable coil
- 5 kV / 10 mm coil-contact
- Reinforced insulation
- Optional test tab (manual operator)
- RoHS compliant (Directive 2002/95/EC)

Applications

Lighting systems, movement sensors, filament and incandescent lamp loads, motors



F0272-A

Approvals

REG.-Nr. 6106, E214025

Technical data of approved types on request

| Contact data | RT.3T | RTS3L |
|--|---------------------------------------|-----------------------------|
| Contact configuration | 1 NO | |
| Contact set | pre-make contact | single contact |
| Type of interruption | | micro disconnection |
| Rated current | 16 A | |
| Rated voltage / max.switching voltage AC | 250/400 VAC | |
| Limiting continuous current | 16 A | |
| Maximum breaking capacity AC | 4000 VA | |
| Limiting making capacity | | |
| max 20 ms (incandescent lamps) | 165 A | 120 A |
| max 200 µs (fluorescent lamps) | 800 A | - |
| Contact material | W (pre-make cont.)+AgSnO ₂ | AgSnO ₂ |
| Mechanical endurance DC | > 5x10 ⁶ cycles | > 10x10 ⁶ cycles |
| bistable | > 3x10 ⁶ cycles | > 5x10 ⁶ cycles |
| tab manually operated | > 10 ³ cycles | - |
| Rated frequency of operation with / without load | 6 / 60 min ⁻¹ | |

Contact ratings

| Type | Load | Cycles |
|-------|--|-------------------------|
| RTS3T | 3000 W, 230 VAC, DF 8,3%, 5 min ⁻¹ , incandescent lamp | typ. 12x10 ³ |
| RT*3T | 16 A, 250 VAC, capacitive load 140 µF, 7,5 min ⁻¹ , EN60669-1 | > 20x10 ³ |
| RT*3T | TV5, UL508, 40°C | 25x10 ³ |
| RTS3L | 16 A, 250 VAC, 85°C | > 100x10 ³ |
| RTS3L | 1.5 hp, 240 VAC | |
| RTS3L | TV8, UL508, 40°C | 25x10 ³ |
| RTS3L | 10/100 A / 250 VAC, simulated lamp load, acc. to IEC 61810-2 | 20x10 ³ |

Coil data


Coil data, monostable coil

| | |
|---|-------------|
| Rated coil voltage range | 5...110 VDC |
| Coil power | typ 400 mW |
| Operative range | 2 |
| Coil insulation system according UL1446 | class F |

Coil versions, monostable DC-coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-------------------|---------------------|
| 005 | 5 | 3.5 | 0.5 | 62±10% | 403 |
| 006 | 6 | 4.2 | 0.6 | 90±10% | 400 |
| 012 | 12 | 8.4 | 1.2 | 360±10% | 400 |
| 024 | 24 | 16.8 | 2.4 | 1440±10% | 400 |
| 048 | 48 | 33.6 | 4.8 | 5520±10% | 417 |
| 060 | 60 | 42.0 | 6.0 | 8570±12% | 420 |
| 110 | 110 | 77.0 | 11.0 | 28800±12% | 420 |

All figures are given for coil without preenergization, at ambient temperature +23°C
Other coil voltages on request

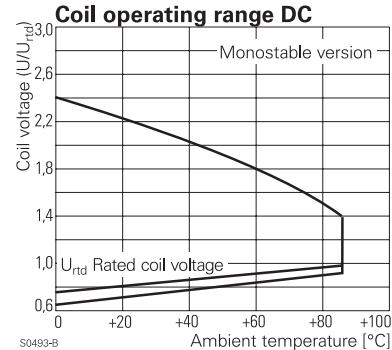

S0493-B

Power PCB Relay RT1 Inrush Power (Continued)

Coil data, bistable coils

| | 1 coil | 2 coils |
|---|-------------------|------------|
| Rated coil voltage range | 3...24 VDC | |
| Coil power | typ 400 mW | typ 600 mW |
| Operative range | | 2 |
| Limiting voltage, % of rated coil voltage | 120% | 150% |
| Minimum energization duration | 30 ms | |
| Maximum energization duration | 1 min at < 10% DF | |
| Coil insulation system according UL1446 | | class F |

Coil versions, bistable 1 coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Reset voltage VDC | Coil resistance Ω | Rated coil power mW |
|-----------|-------------------|---------------------|-------------------|--------------------------|---------------------|
| A03 | 3 | 2.1 | 2.1 | 21 ± 10% | 429 |
| A12 | 12 | 8.4 | 8.4 | 360 ± 10% | 400 |
| A24 | 24 | 16.8 | 16.8 | 1440 ± 10% | 400 |

Coil versions, bistable 2 coils

| | | | | | |
|-----|----|------|------|-----------|-----|
| F03 | 3 | 2.1 | 2.1 | 15 ± 10% | 600 |
| F12 | 12 | 8.4 | 8.4 | 240 ± 10% | 600 |
| F24 | 24 | 16.8 | 16.8 | 886 ± 10% | 650 |

All figures are given for coil without preenergization, at ambient temperature +23°C

Other coil voltages on request

Coils - operation

| Version | 1 coil | | 2 coils | | |
|--|--------|----|---------|----|----|
| Coil terminals | A1 | A2 | A1 | A3 | A2 |
| Pull-in | + | - | | + | - |
| Reset | - | + | | - | + |
| Contact position not defined at delivery | | | | | |

Insulation

| | |
|--|--|
| Dielectric strength coil-contact circuit open contact circuit | 4000 V _{rms} 1250 V _{rms} |
| Clearance / creepage coil-contact circuit | ≥ 10 / 10 mm |
| Material group of insulation parts | ≥ IIIa |
| Tracking index of relay base | PTI 250 V |
| Insulation to IEC 60664-1 | |
| Type of insulation coil-contact circuit open contact circuit | reinforced functional 250 V |
| Rated insulation voltage | |
| Pollution degree | 3 |
| Rated voltage system | 240 V |
| Overvoltage category | 2 400 V III |

Other data



| | RT.3T | RTS3L |
|--|---|--|
| RoHS - Directive 2002/95/EC | compliant | |
| Flammability class according to UL94 | V-0 | |
| Ambient temperature range | monostable -40...70°C bistable: 1 coil -10...70°C bistable: 2 coils -40...70°C | -40...85°C -10...85°C -40...85°C |
| Vibration resistance (function) monostable | 10 g | 20 g |
| Shock resistance (destruction) | 100 g | |
| Category of protection | RTII - flux proof | |
| Mounting | pcb or on socket ^{*)} | |
| Mounting distance | 0 mm | |
| Resistance to soldering heat | 270 °C / 10 s | |
| Relay weight with / without test tab | 16 / 14 g | - / 14 g |
| Packaging unit with / without test tab | 100 / 500 pcs | - / 500 pcs |

*) RTT3T or bistable 2 coil version, pcb mounting only; see Accessories

Accessories RTS3.

For details see datasheet


Accessories Power Relay RT

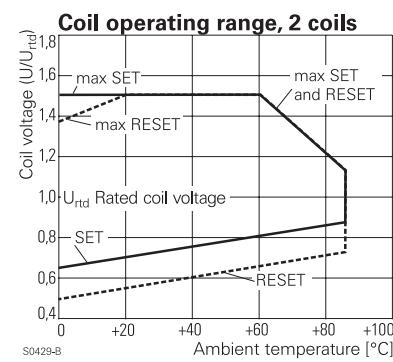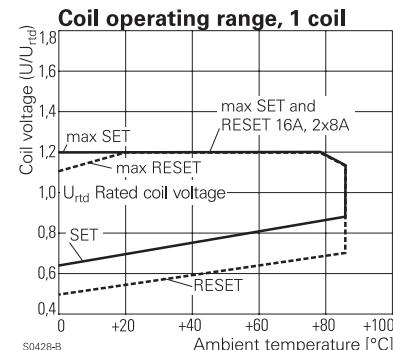

Terminal assignment


Bottom view on solder pins

monostable version

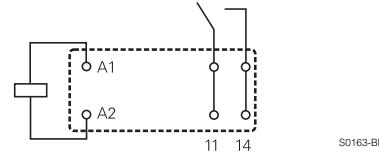

S0163-BF

bistable version

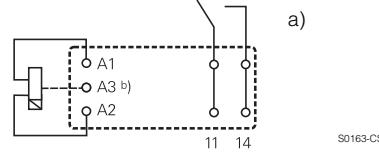

S0163-CS


a) Indicated contact position during or after coil energization with reset voltage.

b) for 2 coil version only


Power PCB Relay RT1 Inrush Power (Continued)

Dimensions / PCB layout

version without test tab

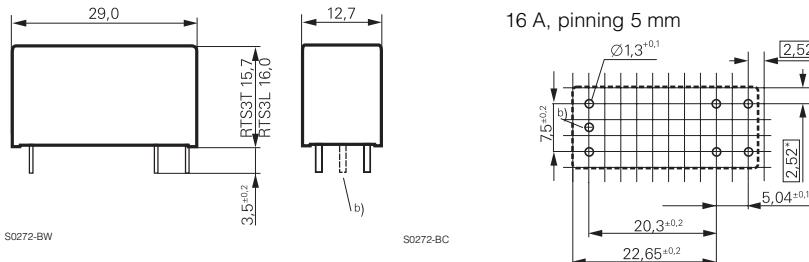

version with test tab

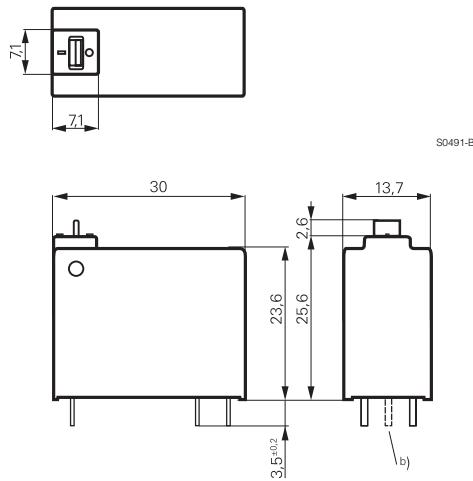

*) With the recommended PCB hole sizes a grid pattern from 2.5 mm to 2.54 mm can be used.

Product key

Type

Version

S without test tab**T** with test tab (manual operator)
for contact material 'T' only

Contact configuration


3 1 NO contact

Contact material

L AgSnO₂**T** Tungsten (W) pre-make + AgSnO₂

Coil

Coil code: please refer to coil versions table

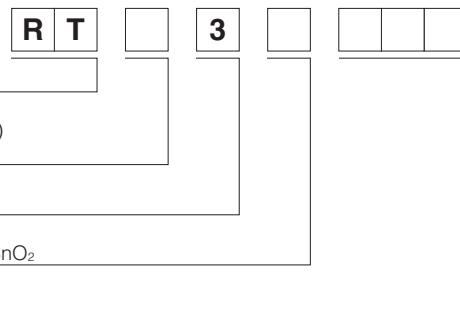

Power PCB Relay RT1 Inrush Power (Continued)

| Product key | Version | Contacts | Cont. material | Coil | Coil | Part number |
|-------------|------------------|--------------|---------------------------------|-----------------|--------|-------------|
| RTS3L005 | without test tab | 1 NO contact | AgSnO ₂ | monostable coil | 5 VDC | 1-1415898-8 |
| RTS3L012 | | | | | 12 VDC | 1-1415898-9 |
| RTS3L018 | | | | | 18 VDC | 2-1415898-0 |
| RTS3L024 | | | | | 24 VDC | 1-1415898-4 |
| RTS3L048 | | | | | 48 VDC | 2-1415898-1 |
| RTS3L060 | | | | | 60 VDC | 2-1415898-2 |
| RTS3LA12 | | | | bistable 1-coil | 12 VDC | 2-1415898-3 |
| RTS3LA24 | | | | | 24 VDC | 2-1415898-4 |
| RTS3LF12 | | | | | 12 VDC | 2-1415898-5 |
| RTS3LF24 | | | | | 24 VDC | 2-1415898-6 |
| RTS3T012 | with test tab | | W pre-make + AgSnO ₂ | monostable coil | 12 VDC | 0-1415898-0 |
| RTS3T024 | | | | | 24 VDC | 0-1415898-1 |
| RTS3TA12 | | | | | 12 VDC | 0-1415898-2 |
| RTS3TA24 | | | | | 24 VDC | 0-1415898-3 |
| RTS3TF03 | | | | | 3 VDC | 0-1415898-4 |
| RTS3TF12 | | | | | 12 VDC | 0-1415898-5 |
| RTS3TF24 | | | | 2-coils | 24 VDC | 0-1415898-6 |
| RTT3TA12 | | | | | 12 VDC | 0-1415898-7 |
| RTT3TA24 | | | | | 24 VDC | 0-1415898-8 |
| RTT3TF12 | | | | | 12 VDC | 0-1415898-9 |
| RTT3TF24 | | | | | 24 VDC | 1-1415898-0 |