

Raychem Corporation
300 Constitution Drive
Menlo Park, CA 94025
800-227-4856
FAX 800-227-4866

R
PolySwitch®
PTC Devices
Resettable Fuse

PRODUCT: RUSB160

DOCUMENT: SCD 23856
PCN: 552409
REV LETTER: D
REV DATE: NOVEMBER 17, 1998
PAGE NO.: 1 OF 1

Specification Status: Released

Electrical Rating

Voltage: 16VDC MAX

Current: 40A MAX

Leads:

24 AWG Tin/lead plated copper clad
steel

PART MARKING:




Raychem Logo

R 160

Part Identification



Lot Identification
(can be on back)

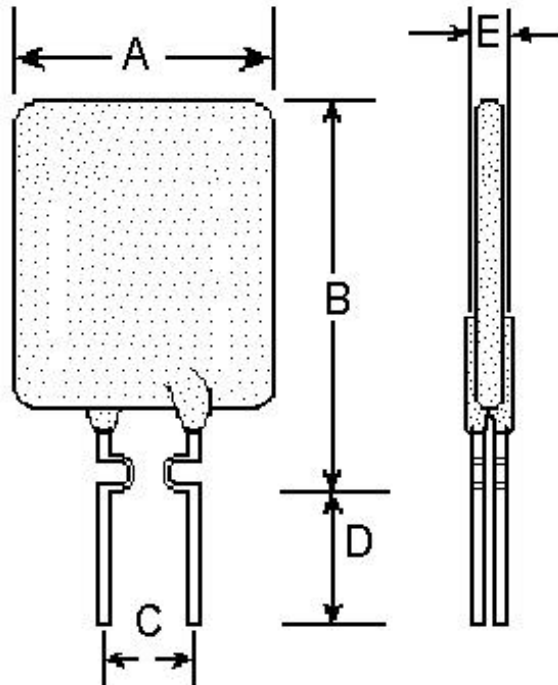

Lot identification may be on back of part

TABLE I. DIMENSIONS:

	A MAX	B MAX	C MIN	C MAX	D MIN	E MAX
mm:	8.9	15.2	4.3	5.8	7.6	3.0
in*:	(0.35)	(0.60)	(0.17)	(0.23)	(0.30)	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS				TIME TO TRIP	RESISTANCE			TRIPPED-STATE POWER DISSIPATION
AMPS 20°C HOLD	AMPS AT 0°C HOLD	AMPS AT 20°C HOLD	AMPS AT 20°C TRIP	AMPS AT 60°C HOLD	SECONDS AT 20°C, 8 A MAX	OHMS AT 20°C	MIN	TYP	MAX*
1.60	1.84	1.60	3.20	0.96	9		0.03	0.05	0.11
									0.9

*Maximum resistance is measured one hour after device is tripped and allowed to reset.

Recognitions:

UL pending.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.