

Tyco/Electronics**Raychem Circuit Protection**

308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
Fax: 800-227-4866

PolySwitch®
PTC Devices
Overcurrent Protection Device

PRODUCT: RXE075

DOCUMENT: SCD 21868
PCN: 465979
REV LETTER: G
REV DATE: AUGUST 1, 2001
PAGE NO.: 1 OF 1

Specification Status: RELEASED**Electrical Rating****Voltage: 72V MAX****Current: 40A MAX****Insulating Material:**

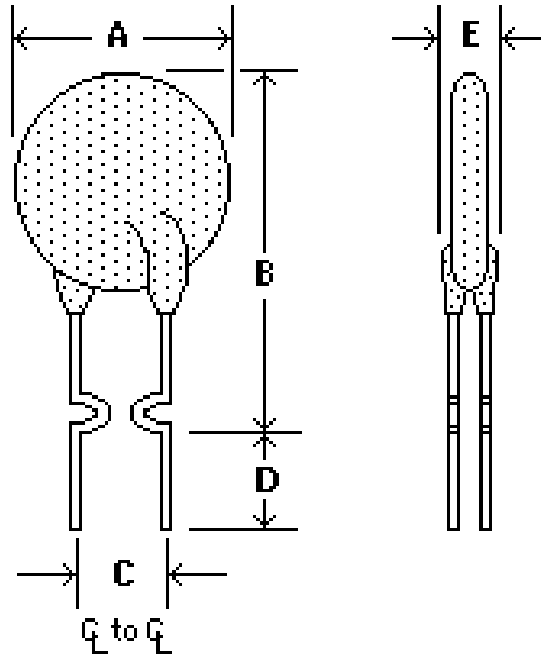
Cured, Flame Retarded Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

24 AWG Tin Lead Plated Copper

Marking:

Raychem Logo
and Voltage
X 72
X 075 — Part Identification
□ □ □ □ — Lot Identification
(can be on back)

**TABLE I. DIMENSIONS:**

A		B		C		D		E	
MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
--	10.4	--	15.2	4.3	5.8	7.6	--	--	3.0
--	(0.41)	--	(0.60)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I _H RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C			OHMS AT 20°C			
AMPERES 20°C HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	SECONDS AT 20°C, 3.75A MAX	MIN	MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
.75	.90	1.80	.75	1.50	.49	.98	6.3	.25	.40	.60	.92

Recognitions:

UL, CSA and TUV approved.

Reference Documents:

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).
PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.