

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXE185

DOCUMENT: SCD 21872
 PCN: 385417
 REV LETTER: H
 REV DATE: AUGUST 22, 2001
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retarded Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin Lead Plated Copper

Marking:

Raychem Logo and Voltage
 X 72
 X 185 — Part Identification
 □ □ □ □ — Lot Identification (can be on back)

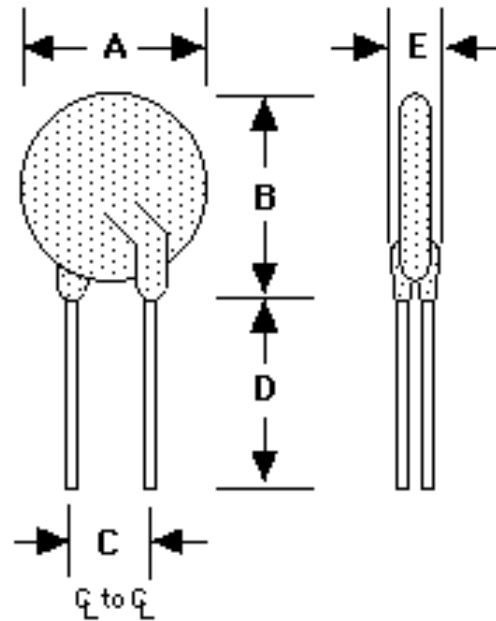


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	17.5	--	22.4	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.69)	--	(0.88)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I _H RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C			OHMS AT 20°C			
AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	TRIP	AMPERES AT 20°C HOLD	TRIP	AMPERES AT 60°C HOLD	TRIP	SECONDS AT 20°C, 9.25A MAX	MIN	MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
1.85	2.22	4.44	1.85	3.70	1.20	2.40	12.6	0.08	0.12	0.19	2.1

Recognitions: UL, CSA and TUV approved.

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXE185

DOCUMENT: SCD 21872
 PCN: 385417
 REV LETTER: H
 REV DATE: AUGUST 22, 2001
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retarded Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin Lead Plated Copper

Marking:

Raychem Logo and Voltage
 X 72
 X 185 — Part Identification
 □ □ □ □ — Lot Identification (can be on back)

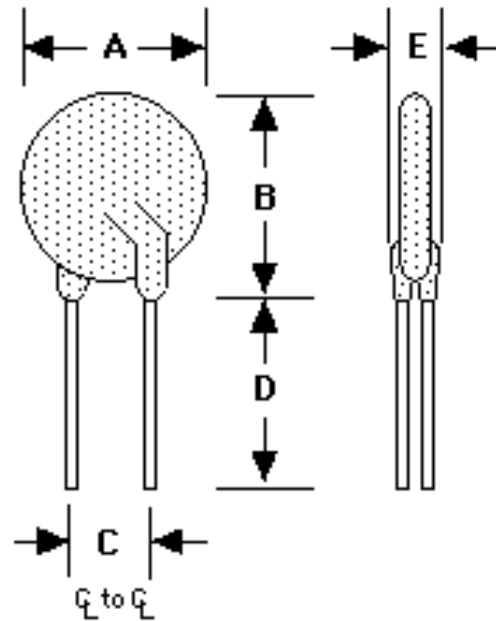


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	17.5	--	22.4	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.69)	--	(0.88)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I _H RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C			OHMS AT 20°C			
AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	TRIP	AMPERES AT 20°C HOLD	TRIP	AMPERES AT 60°C HOLD	TRIP	SECONDS AT 20°C, 9.25A MAX	MIN	MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
1.85	2.22	4.44	1.85	3.70	1.20	2.40	12.6	0.08	0.12	0.19	2.1

Recognitions: UL, CSA and TUV approved.

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXE185

DOCUMENT: SCD 21872
 PCN: 385417
 REV LETTER: H
 REV DATE: AUGUST 22, 2001
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retarded Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 20 AWG Tin Lead Plated Copper

Marking:

Raychem Logo and Voltage
 X 72
 X 185 — Part Identification
 □ □ □ □ — Lot Identification (can be on back)

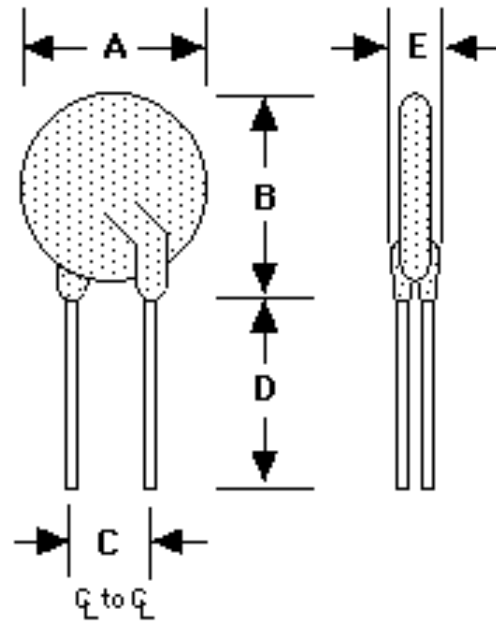


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	17.5	--	22.4	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.69)	--	(0.88)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I _H RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C			OHMS AT 20°C			
AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	TRIP	AMPERES AT 20°C HOLD	TRIP	AMPERES AT 60°C HOLD	TRIP	SECONDS AT 20°C, 9.25A MAX	MIN	MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
1.85	2.22	4.44	1.85	3.70	1.20	2.40	12.6	0.08	0.12	0.19	2.1

Recognitions: UL, CSA and TUV approved.

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.