

NEWAVA

TITLE

1.544 mHz T1, TRANSFORMER

PN **S10951**

REV **B**

AGENCY APPROVAL: NA

SH 1 OF 1



SPECIFICATIONS:

1. LONGITUDINAL BALANCE: 40 db MIN @ 4 kHz
(2-6) OR (3-5)
WITH 1 AND 4 GROUNDED
100 OHMS - 100 OHMS

2. INDUCTANCE: 6-2 = 3.78 - 8.44 mHy
@ 0.1 Vrms, 10.0 kHz

3. HI-POT: 1000 Vdc MIN WINDING TO WINDING
WINDING TO CORE

4. TURNS RATIO: (6-2) : (3-5) = 1 CT : 1 CT $\pm$ 1 %

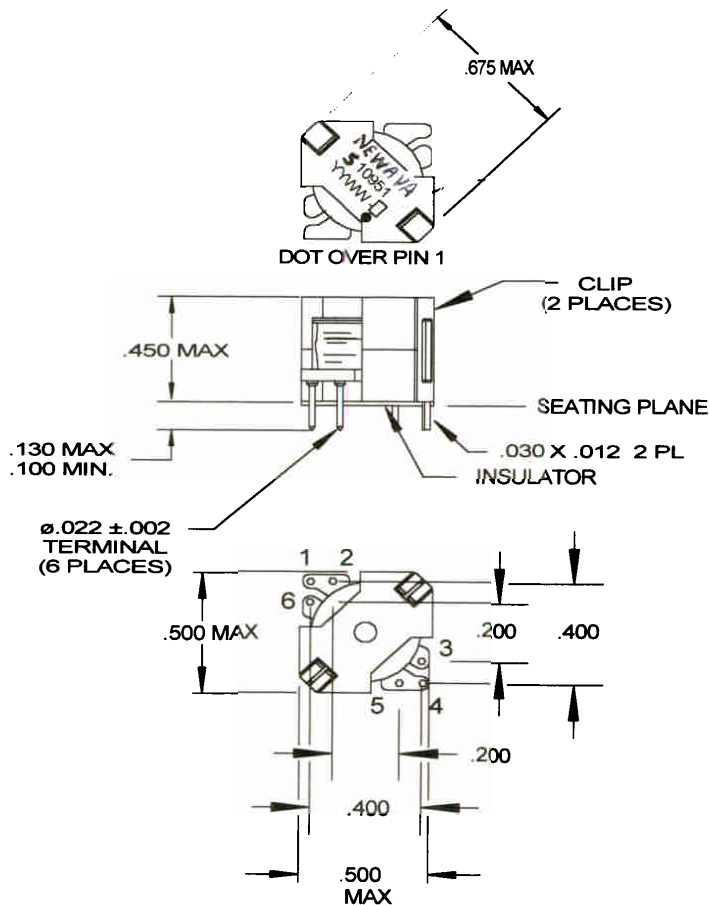

NOTE: PIN 1 DOT MUST BE A DOT, NOT AN ASTERICK!

TOLERANCES UNLESS OTHERWISE SPECIFIED	INCHES / DECIMAL	.XX = $\pm$.01	.XXX = $\pm$.005	ANGLES $\pm$ 1°
	MILLIMETERS (mm)	.XX = $\pm$ 0.20		