


Features

- Designed for 100VAC line.
- Large devices have isolated external mounting tab.
- Two lead style (bare wire or PVC lead).


Applications

- Suppressing noise occurring in Automatic machines, Office appliances and Power source.

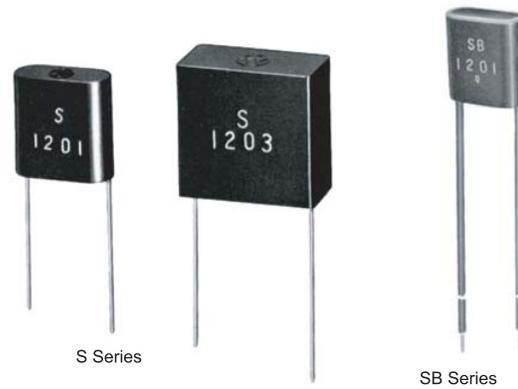


Dimensions

● S Series

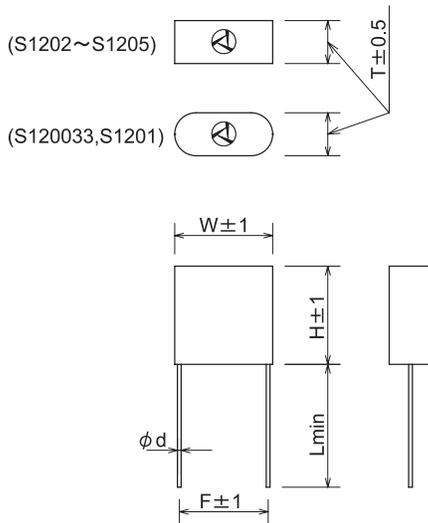

● SB Series

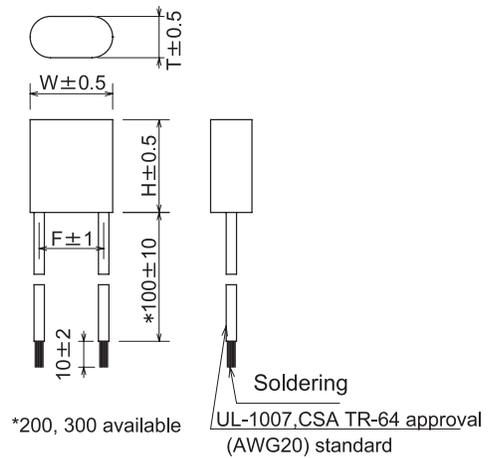

Unit: mm

Circuit



Electrical Specifications

Rated Voltage **150VAC**

Model Number	Capacitance μF ±20%	Resistance Ω ±30%	Dimensions					Pulse condition (Max.)				Peak Pulse Voltage	Test Voltage	Insulation Resistance					
			W	H	T	F	d	L	Peak to peak	Pulse width Max	Repetitive frequency				Pulse width (sec) x Frequency (Hz)				
S120033	0.003	120 (1/4W)	16.0	16.0	7.0	14.5	0.6±0.05	20.0	650V max	20msec.	120Hz max	3 max	700V	Line to Line 750VDC or 375Vrms 50/60Hz 60sec	Line to Line 10000M Ω min				
S1201	0.1		18.0	22.0	11.0	15.5	0.8±0.07	15.0		50msec.						3 max			
S1202	0.2	23.0															22.5	11.5	20.0
S1203	0.3											19.0							
S1205	0.5	16.0	18.0	8.0	12.5	—	—	3 max											
SB1201	0.1								120 (1/4W)	16.0	18.0	8.0	12.5	—	—	—	—	—	Line to Case 1500Vrms 50/60Hz 60sec
SB1202	0.2	120 (1/4W)	19.0	23.0	8.5	15.0	—	—	—	—	—	—	—						

Operating Temperature: -40~+85°C