




SK32 THRU S310

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
VOLTAGE - 20 to 100 Volts CURRENT - 3.0 Amperes

FEATURES

Plastic package has Underwriters Laboratory
Flammability Classification 94V-O
For surface mounted applications
Low profile package
Built-in strain relief
Metal to silicon rectifier
majority carrier conduction
Low power loss, High efficiency
High current capability, low V_F
High surge capacity
For use in low voltage high frequency inverters,
free wheeling, and polarity protection applications
High temperature soldering guaranteed:
260 °C/10 seconds at terminals

SMC/DO-214AB

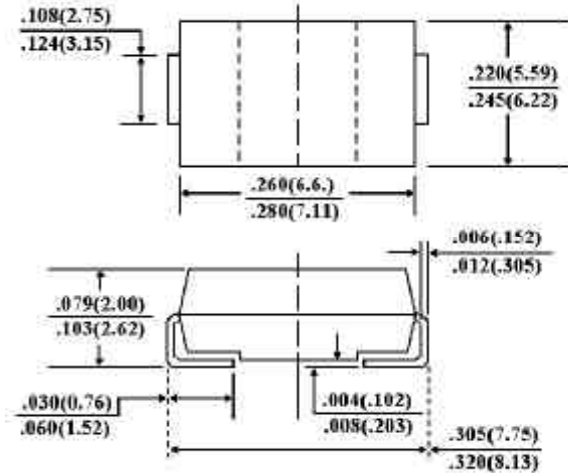

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic
Terminals: Solder plated, solderable per MIL-STD-750,
Method 2026
Polarity: Color band denotes cathode
Standard packaging: 16mm tape (EIA-481)
Weight: 0.007 ounce, 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SK32	SK33	SK34	SK35	SK36	SK38	SK39	S310	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	64	71	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at $T_L=75\text{ }^{\circ}\text{C}$	$I_{(AV)}$	3.0								Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	100								Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V_F	0.50			0.70		0.85			Volts
Maximum DC Reverse Current $T_A=25\text{ }^{\circ}\text{C}$ (Note 1)	I_R	0.5								mA
At Rated DC Blocking Voltage $T_A=100\text{ }^{\circ}\text{C}$		20.0								
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$	17 55								$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-50 to +125								$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-50 to +150								$^{\circ}\text{C}$

NOTES:

- Pulse Test with $PW=300$ µsec, 2% Duty Cycle.
- Mounted on P.C.Board with $14mm^2$ (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES
SK32 THRU S310


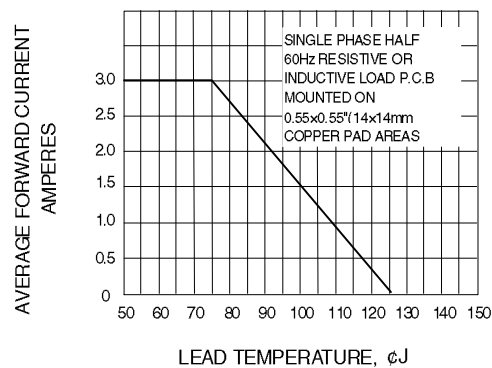


Fig. 1-FORWARD CURRENT DERATING CURVE

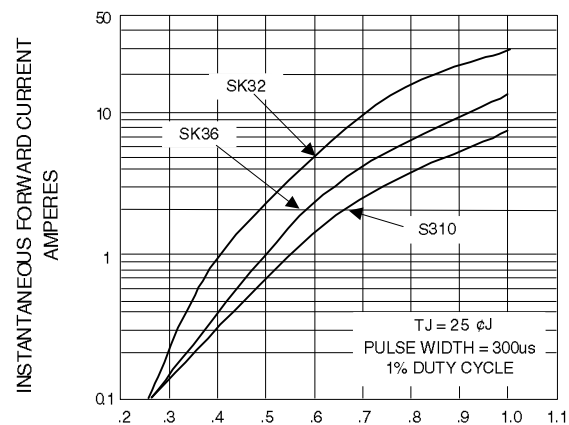

TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

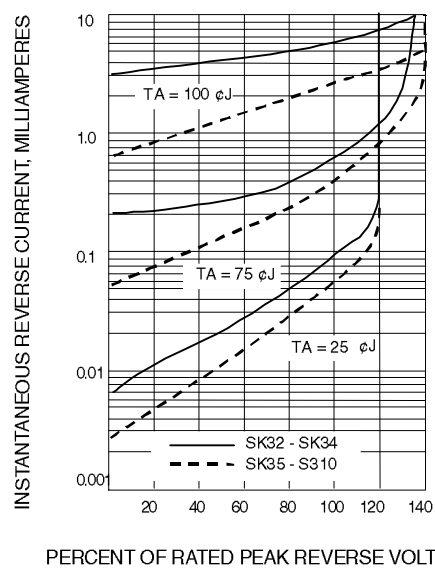


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

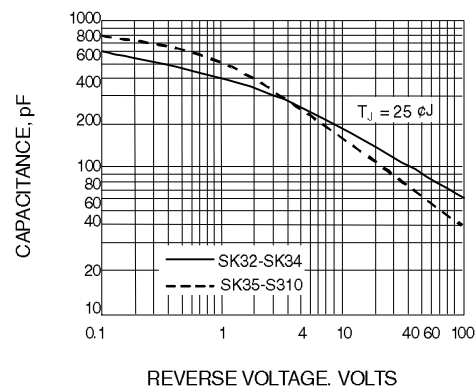


Fig. 4-TYPICAL JUNCTION CAPACITANCE

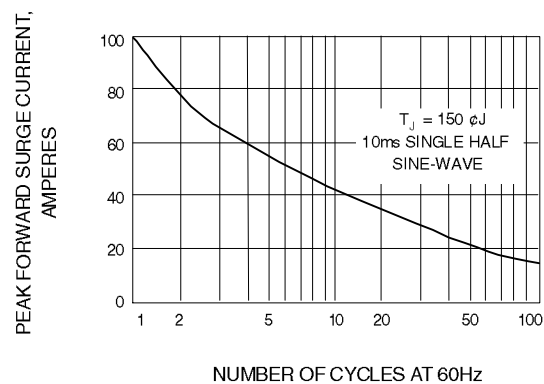


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT