## Customer Information Sheet

DRAWING No.: \$409-XX / \$410-XX

SHEET 3 OF 4


IF IN DOUBT - ASK

NOT TO SCALE

THIRD ANGLE PROJECTION

0.80±0.03 →

ALL DIMENSIONS IN mm

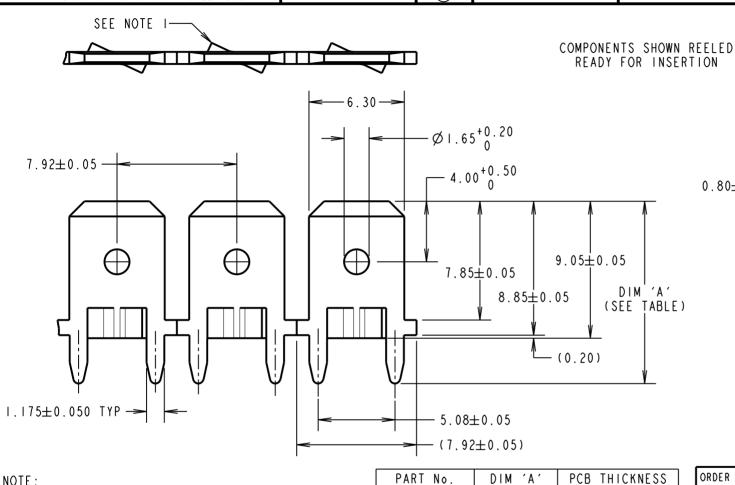

A STANDARD OF THE PARTY OF THE

25 09.11.11 11532 DATE C/NOTE APPROVED: S.BENNETT

S.FLOWER

I. SANDY

ORDER CODE:

(SEE TABLE)

mm<sup>2</sup>

S4XX-46 TYPE 09 OR 10 —

2.0 -

CUSTOMER REF.:

CHECKED:

DRAWN:

ASSEMBLY DRG:

2. QUANTITY OF TABS PER COIL = IOK.

4. PLATING THICKNESS = 4μ 100% TIN.

TOTAL WEIGHT PER COIL = 6.153kg.

3. RECOMMENDED MOUNTING HOLE SIZE  $= \emptyset$ 1.25  $\pm$ 0.06mm.

I. ANTI-ROCKING FEATURE.

www.harwin.com technical@harwin.com THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING.

THEIR WRITTEN PERMISSION

TENDERING OR FOR ANY OTHER PURPOSE WITHOUT

S409-XX

S410-XX

**TOLERANCES** X. = ±1mm

12.05

12.85

 $X.XXX = \pm 0.01$ mm

ANGLES = ±5° UNLESS STATED MATERIAL:

S/AREA:

1.60

2.40

BRASS CW508L HI50 TO BS EN 1652 (CuZn37 HARD)

SEE ABOVE FINISH:

\$409-46 / \$410-46

SHT  $^3$  or  $_{\scriptscriptstyle A}$   $^{\prime}$ 


CONFIDENTIAL AND COPYRIGHT

 $X.X = \pm 0.25 mm$  $X.XX = \pm 0.10$ mm

DRAWING NUMBER:

TITLE: 6.3mm BLADE VERTICAL REELED TAB TERMINAL

## Customer Information Sheet

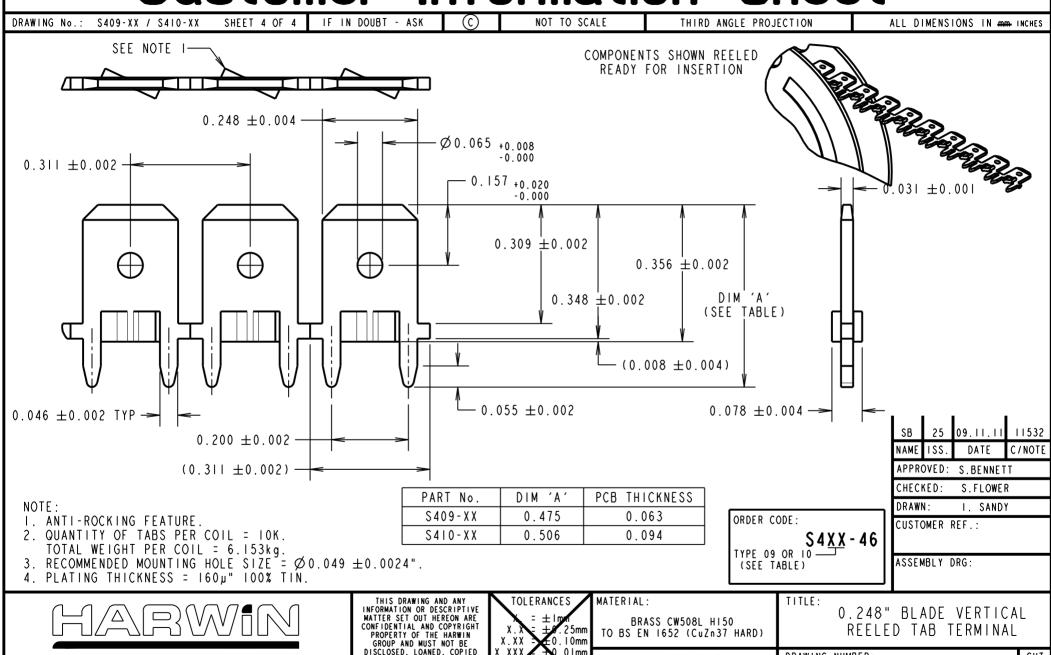

OR USED FOR MANUFACTURING.

TENDERING OR FOR ANY

OTHER PURPOSE WITHOUT

THEIR WRITTEN PERMISSION

www.harwin.com

technical@harwin.com

FINISH:

S/AREA:

SEE ABOVE

mm<sup>2</sup>

DRAWING NUMBER:

\$409-46 / \$410-46

SHT

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Harwin: \$409-46