

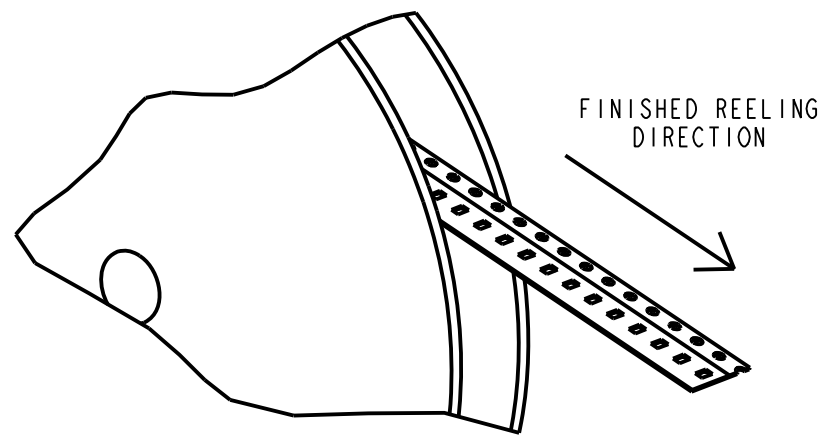
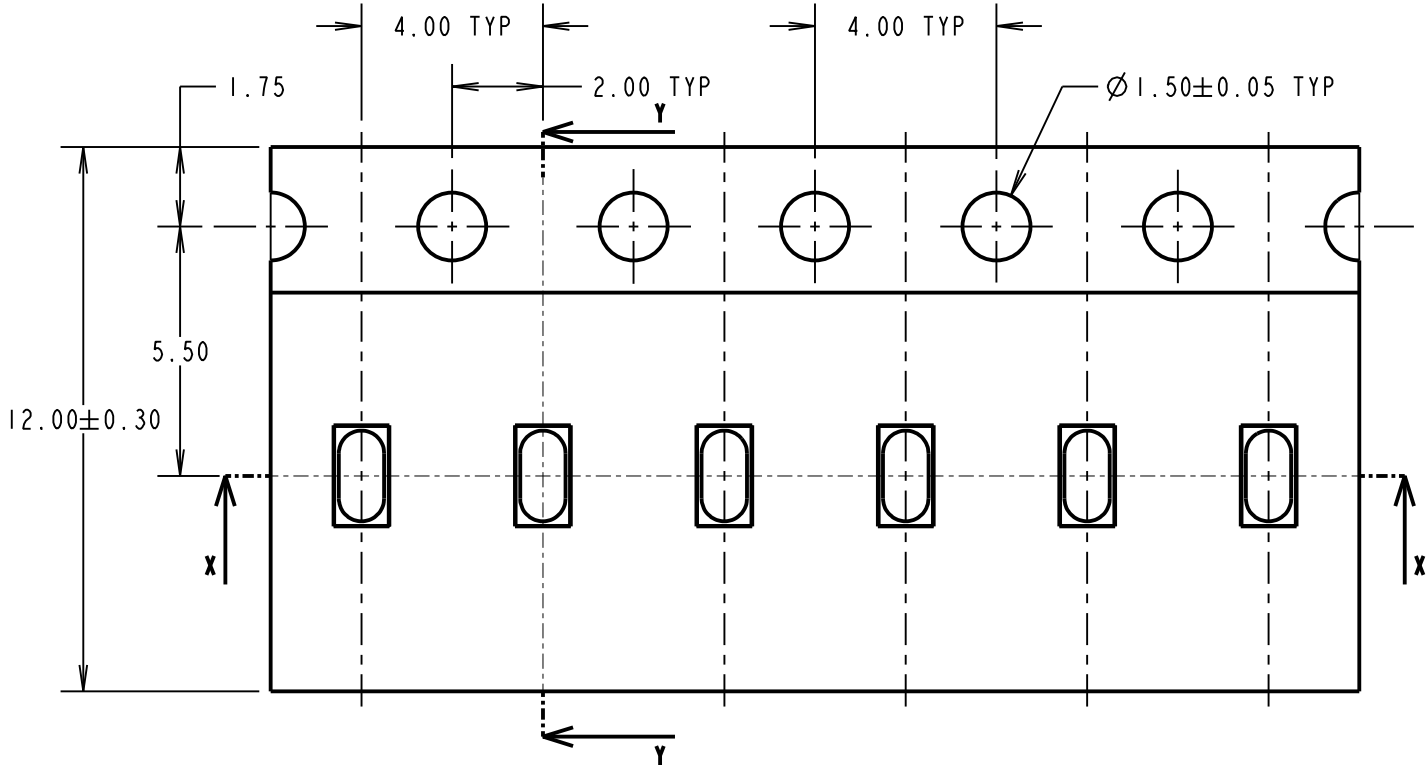



Customer Information Sheet

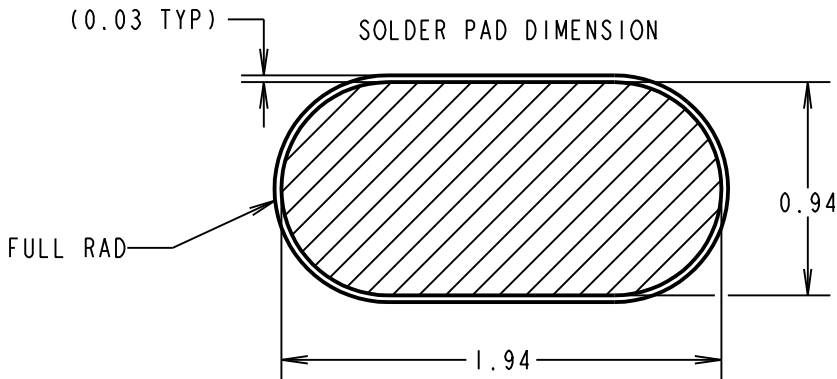


COMPONENT DETAILS

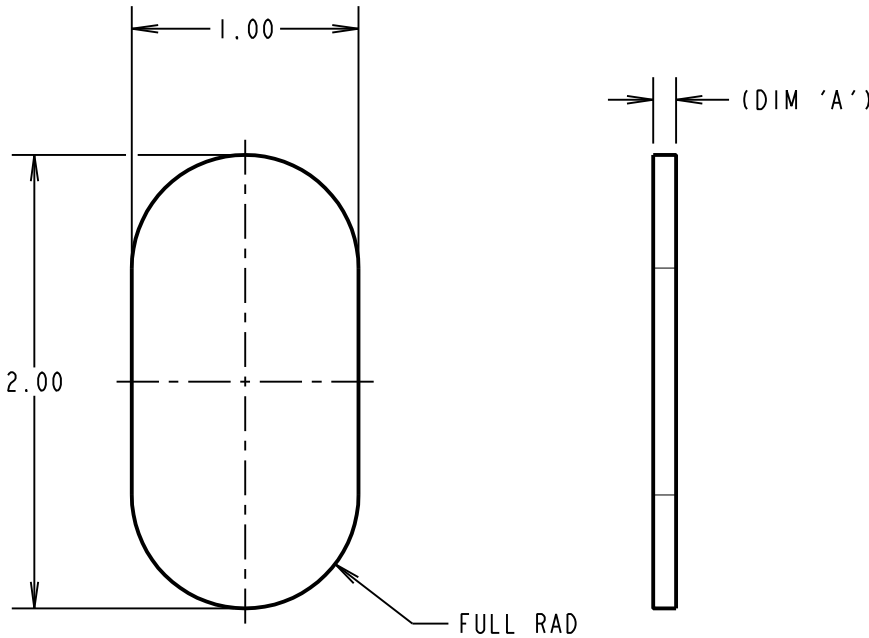


SECTION X-X

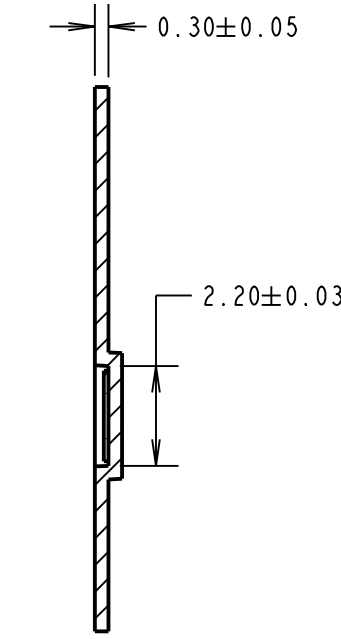

SECTION Y-Y

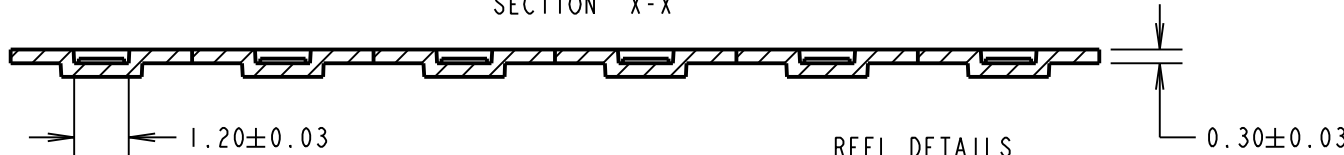

REEL DETAILS

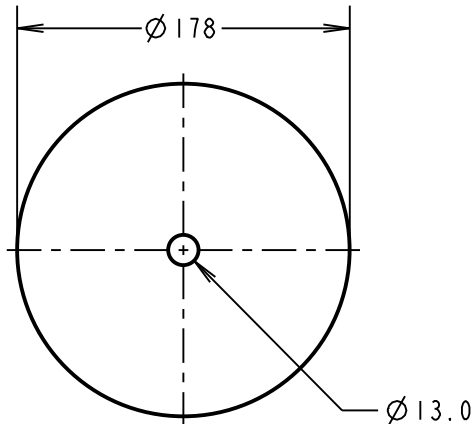

PART	DIM 'A'
S70-220101045R	0.10
S70-220102045R	0.20

ORDER CODE:
S70-22010XX45R

SIZE:
LENGTH _____
WIDTH _____
DIM 'A' = THICKNESS _____

SPECIFICATIONS:
FINISH:
0.025 - 0.075µ GOLD OVER 1.50 - 3µ NICKEL
ELECTRICAL:
CURRENT RATING = 0.5A
CONTACT RESISTANCE = 0.15mΩ
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO +85°C

NOTES:
1. QUANTITY OF COMPONENTS PER REEL = 9000.
2. PRODUCT IS TAPE AND REELED IN GENERAL ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

MSP	2	19.08.16	20041
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		M.PERREN	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
BERYLLIUM COPPER
FINISH:
CLEAN
S/AREA:
mm ²

TITLE:
SMT POGO PIN CONTACT PAD
DRAWING NUMBER:
S70-22010XX45R
SHT 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Harwin:

[S70-220102045R](#) [S70-220101045R](#)