

57mm (2.3INCH) SINGLE DIGIT NUMERIC DISPLAY

Part Number: SA23-12GWA

Green


Features

- 2.3 inch digit height.
- Low current operation.
- Excellent character appearance.
- High light output.
- Easy mounting on P.C. boards or sockets.
- Multicolor available.
- Mechanically rugged.
- Standard : gray face, white segment.
- RoHS compliant.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions& Internal Circuit Diagram

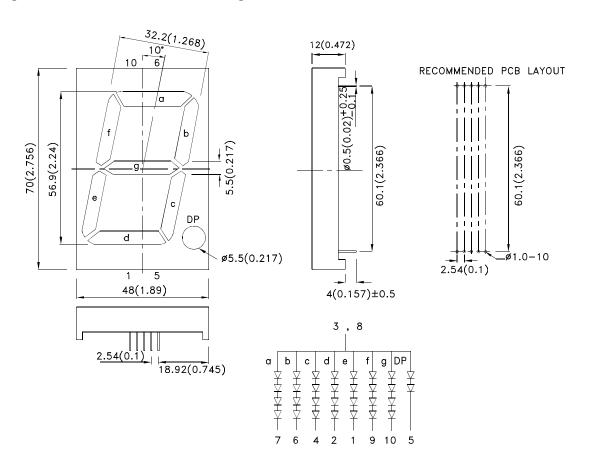

Notes:

- 1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.
- 2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAN0652 APPROVED: WYNEC

REV NO: V.1A CHECKED: Joe Lee DATE: JUN/24/2013 DRAWN: Q.M.Chen



PAGE: 1 OF 7 ERP: 1301000241

Selection Guide

| Part No. | Dice | Lens Type | lv (ucd) [1] @ 10mA | | Description |
|------------|--------------|----------------|------------------------|--------|-----------------------------------|
| | | | Min. | Тур. | • |
| SA23-12GWA | Green (GaP) | White Diffused | 31000 | 65000 | Common Anode, Rt. Hand Decimal |
| 0A25-120WA | Green (Gar) | vvince Dinasca | *9000 | *20000 | |

Electrical / Optical Characteristics at TA=25°C

| Symbol | Parameter | Device | Тур. | Max. | Units | Test Conditions |
|--------|-------------------------------|--------|--------------|---------------|-------|------------------|
| λpeak | Peak Wavelength | Green | 565 | | nm | IF=20mA |
| λD [1] | Dominant Wavelength | Green | 568 | | nm | IF=20mA |
| Δλ1/2 | Spectral Line Half-width | Green | 30 | | nm | IF=20mA |
| С | Capacitance | Green | 15 | | pF | VF=0V;f=1MHz |
| VF [2] | Forward Voltage (DP) | Green | 8.8 (4.4) | 10.0 (5.0) | V | Ir=20mA |
| lR | Reverse Current (Per Chip) | Green | | 10 (10) | uA | VR=5V (VR=5V) |

- Notes:
 1.Wavelength: +/-1nm.
 2. Forward Voltage: +/-0.1V.
 3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

Absolute Maximum Ratings at TA=25°C


| Parameter | Green | Units | | |
|-------------------------------|-----------------------|-------|--|--|
| Power dissipation (DP) | 250 (125) | mW | | |
| DC Forward Current (DP) | 25 (25) | mA | | |
| Peak Forward Current [1] (DP) | 140 (140) | mA | | |
| Reverse Voltage (Per Chip) | 5 (5) | V | | |
| Operating/Storage Temperature | -40°C To +85°C | | | |
| Lead Solder Temperature [2] | 260°C For 3-5 Seconds | | | |

Notes:

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.


SPEC NO: DSAN0652 **REV NO: V.1A DATE: JUN/24/2013** PAGE: 2 OF 7 APPROVED: WYNEC **CHECKED:** Joe Lee DRAWN: Q.M.Chen ERP: 1301000241


Notes:
1. Luminous intensity/ luminous Flux: +/-15%.
*Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

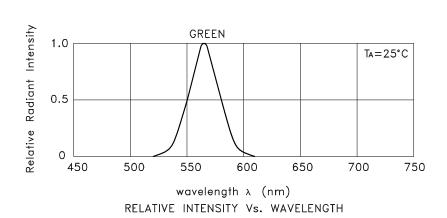



Green


SA23-12GWA





















SPEC NO: DSAN0652 REV NO: V.1A
APPROVED: WYNEC CHECKED: Joe Lee

DATE: JUN/24/2013 PAGE: 4 OF 7
DRAWN: Q.M.Chen ERP: 1301000241

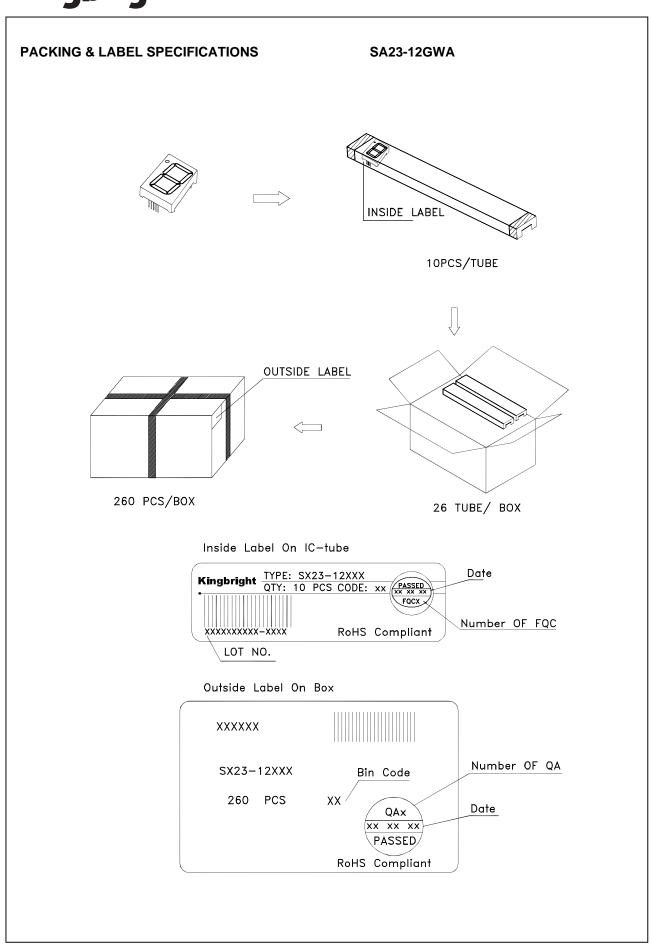


SPEC NO: DSAN0652 APPROVED: WYNEC REV NO: V.1A CHECKED: Joe Lee DATE: JUN/24/2013 DRAWN: Q.M.Chen PAGE: 5 OF 7 ERP: 1301000241

THROUGH HOLE DISPLAY MOUNTING METHOD

Lead Forming

Do not bend the component leads by hand without proper tools. The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

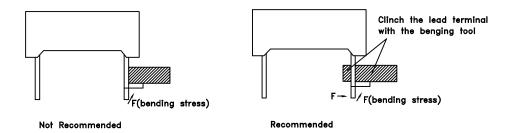


Installation

- 1. The installation process should not apply stress to the lead terminals.
- 2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.




3.The component shall be placed at least 5mm from edge of PCB to avoid damage caused excessive heat during wave soldering.



SPEC NO: DSAN0652 APPROVED: WYNEC REV NO: V.1A CHECKED: Joe Lee DATE: JUN/24/2013 DRAWN: Q.M.Chen PAGE: 6 OF 7 ERP: 1301000241

DISPLAY SOLDERING CONDITIONS

Wave Soldering Profile For Lead-free Through-hole LED.



NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85°C.
- 3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.During wave soldering , the PCB top—surface temperature should be kept below 105°C 5.No more than once.

Soldering General Notes:


- 1. Through—hole displays are incompatible with reflow soldering.
- 2. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Kingbright for compatibility.

CLEANING

- 1.Mild "no-clean" fluxes are recommended for use in soldering.
- If cleaning is required, Kingbright recommends to wash components with water only. Do not use harsh organic solvents for cleaning, because they may damage the plastic parts .And the devices should not be washed for more than one minute.

CIRCUIT DESIGN NOTES

- 1.Protective current—limiting resistors may be necessary to operate the Displays.
- 2.LEDs mounted in parallel should each be placed in series with its own current—limiting resistor.



All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes

SPEC NO: DSAN0652 APPROVED: WYNEC REV NO: V.1A CHECKED: Joe Lee DATE: JUN/24/2013 DRAWN: Q.M.Chen PAGE: 7 OF 7 ERP: 1301000241

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kingbright: SA23-12GWA