

Overview

Ferrite power inductors are useful in various fields and suitable for DC/DC converters and noise filters.

Applications

Typical applications include LED lighting, xDSL modems, copying machines, flat TVs, smart meters and power supplies.

Benefits

- Drum core construction
- Nickel-Zinc (NiZn) ferrite core
- Magnetic non-shield type
- Operating temperature range of up to +105°C
- Available in tape and reel
- RoHS Compliant




Ordering Information

SBCP-	47HY	150	H	B
Series	Core Size	Inductance Code (μH)	External Tube	Packaging Type
SBCP	Outer size x height 47HY = φ 4.5 × 7.0 87HY = φ 8.0 × 7.5 80HY = φ 8.0 × 10.0 11HY = φ 11.0 × 11.0 14HY = φ 11.0 × 14.0	First two digits represent significant figures. Third digit specifies number of zeros.	Blank = None H = Presence (only for core sizes 87HY, 80HY and 11HY)	B = Bulk Blank = Tape and reel


Dimensions – Millimeters

SBCP-47HY Series

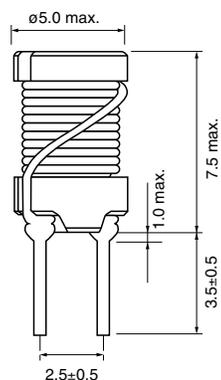


*Lead: hard copper wire (ø0.5)

Dimensions of Indented Square Hole Plastic Tape

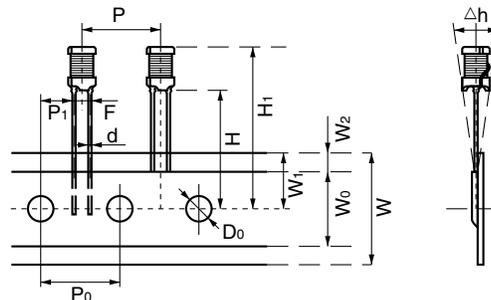


P	P ₀	P ₁	F	W	W ₀	W ₁	W ₂	H	H ₁	D ₀	d	Δh
±1	±0.3	±0.7	±0.5	+1, -0.5	Minimum	+0.75, -0.5	Maximum	+0.2, -0	Maximum	±0.2		±2
12.7	12.7	5.1	2.5	18	12.5	9	3	18	29.5	ø 4	ø 0.5	0

SBCP-87HY Series

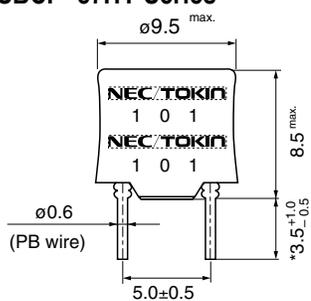

* For bulk type
* Lead pitch is value at the root end.


Dimensions of Indented Square Hole Plastic Tape

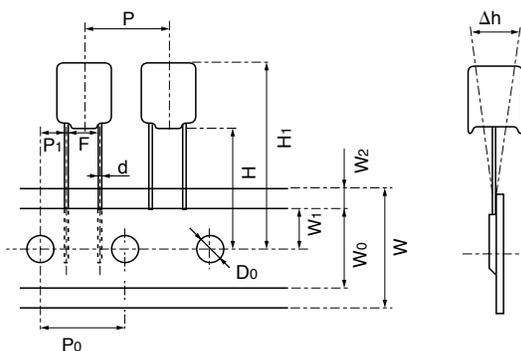

P	P ₀	P ₁	F	W	W ₀	W ₁	W ₂	H	H ₁	D ₀	d	Δh
±1.0	±0.3	±0.7	±1	+1, -0.5	Minimum	+0.75, -0.5	Maximum	+0.2, -0	Maximum	±0.2		±2
12.7	12.7	3.85	5	18	12.5	9	3	18	28.5	ø 4	ø 0.6	0


Dimensions – Millimeters cont'd

SBCP-80HY Series

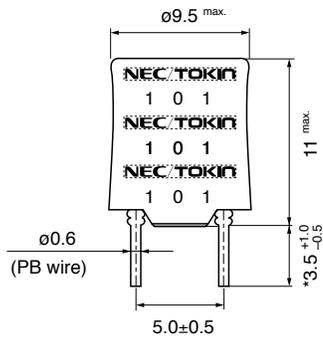


* For bulk type
 * Lead pitch is value at the root end.

Dimensions of Indented Square Hole Plastic Tape

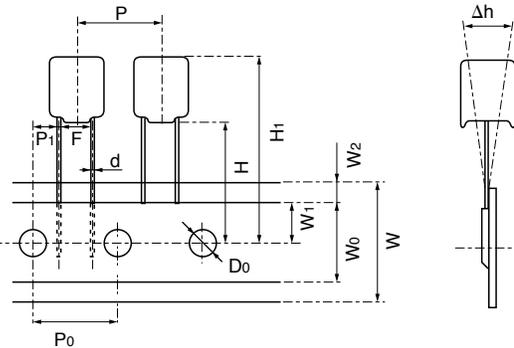


P	P ₀	P ₁	F	W	W ₀	W ₁	W ₂	H	H ₁	D ₀	d	Δh
± 1	± 0.3	± 0.7	± 1	+1, -0.5	Minimum	+0.75, -0.5	Maximum	+2, -0	Maximum	± 0.2		± 2
12.7	12.7	3.85	5	18	12.5	9	3	18	31	$\phi 4$	$\phi 0.6$	0

SBCP-11HY Series

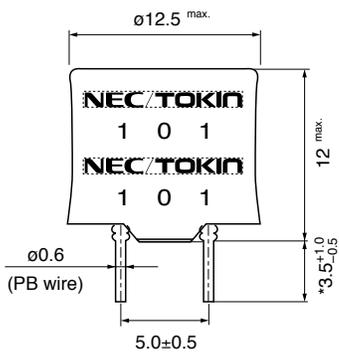

* For bulk type
 * Lead pitch is value at the root end.

Dimensions of Indented Square Hole Plastic Tape

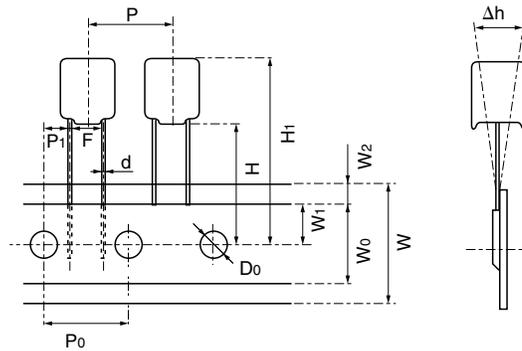

P	P ₀	P ₁	F	W	W ₀	W ₁	W ₂	H	H ₁	D ₀	d	Δh
± 1	± 0.3	± 0.7	± 1	+1, -0.5	Minimum	+0.75, -0.5	Maximum	+2, -0	Maximum	± 0.2		± 2
12.7	12.7	3.85	5	18	12.5	9	3	18	32	$\phi 4$	$\phi 0.6$	0

Dimensions – Millimeters cont'd

SBCP-14HY Series

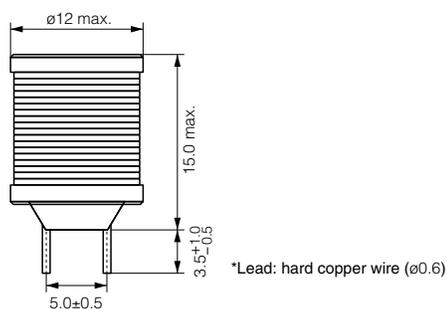


Table 1A – Ratings & Part Number Reference

Part Number	Inductance L (μ H) at 10 kHz, 1 mA	DC Resistance (Ω) Maximum	Rated Current (A)	Current (Reference Value) (A)		
				$\Delta T = 20^\circ\text{C}$	$\Delta T = 40^\circ\text{C}$	L -10% (85°C)
SBCP-47HY2R2B	2.2 \pm 20%	29 m	2.60	2.59	3.66	3.20
SBCP-47HY3R3B	3.3 \pm 20%	37 m	2.30	2.28	3.21	2.70
SBCP-47HY6R8B	6.8 \pm 20%	52 m	1.90	1.92	2.71	1.93
SBCP-47HY100B	10 \pm 20%	67 m	1.60	1.69	2.38	1.60
SBCP-47HY331B	330 \pm 10%	1.80	0.27	0.29	0.39	0.27
SBCP-47HY102B	1000 \pm 10%	6.00	0.15	0.15	0.21	0.16

Table 1B – Ratings & Part Number Reference

Part Number	Inductance L (μH) at 10 kHz, 1 mA	DC Resistance (Ω) Maximum	Rated Current (A) ΔT = 20°C	Current (Reference Value) (A)	
				ΔT = 40°C	L Change Rate -10%
SBCP-87HY4R7H	4.7 ±20%	0.03	3.20	4.40	4.30
SBCP-87HY6R8H	6.8 ±20%	0.04	2.80	3.90	3.40
SBCP-87HY101H	100 ±10%	0.30	0.90	1.20	0.87
SBCP-87HY681H	680 ±10%	1.66	0.33	0.46	0.32
SBCP-80HY100H	10 ±20%	0.05	2.90	4.00	5.30
SBCP-80HY470H	47 ±10%	0.13	1.90	2.60	2.20
SBCP-80HY680H	68 ±10%	0.16	1.70	2.30	1.80
SBCP-80HY820H	82 ±10%	0.24	1.30	1.80	1.70
SBCP-80HY101H	100 ±10%	0.35	1.10	1.50	1.60
SBCP-80HY331H	330 ±10%	0.75	0.70	0.98	0.85
SBCP-80HY102H	1000 ±10%	1.89	0.40	0.56	0.48
SBCP-11HY470H	47 ±20%	0.10	2.00	2.90	4.40
SBCP-11HY101H	100 ±10%	0.19	1.30	1.90	3.00
SBCP-11HY681H	680 ±10%	1.00	0.55	0.77	1.10
SBCP-14HY221B	220 ±10%	0.31	1.05	1.51	2.20
SBCP-14HY331B	330 ±10%	0.38	0.95	1.35	1.84
SBCP-14HY102B	1000 ±10%	1.16	0.59	0.82	1.01
SBCP-14HY222B	2200 ±10%	2.36	0.38	0.54	0.69
SBCP-14HY332B	3300 ±10%	2.42	0.33	0.46	0.57
Part Number	Inductance L (μH) at 10 kHz, 1 mA	DC Resistance (Ω) Maximum	Rated Current (A) ΔT = 20°C	Current (Reference Value) (A)	
				ΔT = 40°C	L Change Rate -10%

Packaging

Series	Packaging Type	Pieces per Box
SBCP-47HY	Bulk	6,000
	Tape & Reel	4,000 ¹
SBCP-87HY	Bulk	4,000
	Tape & Reel	2,000 ²
SBCP-80HY	Bulk	4,000
	Tape & Reel	2,000 ²
SBCP-11HY	Bulk	2,000
	Tape & Reel	1,600 ³
SBCP-14HY	Bulk	1,500

¹ The box contains 4 reels of 1,000 pieces each

² The box contains 4 reels of 500 pieces each

³ The box contains 4 reels of 400 pieces each

KEMET Corporation World Headquarters

2835 KEMET Way
Simpsonville, SC 29681

Mailing Address:
P.O. Box 5928
Greenville, SC 29606

www.kemet.com
Tel: 864-963-6300
Fax: 864-963-6521

Corporate Offices
Fort Lauderdale, FL
Tel: 954-766-2800

North America

Northeast

Wilmington, MA
Tel: 978-658-1663

Southeast

Lake Mary, FL
Tel: 407-855-8886

Central

Novi, MI
Tel: 248-994-1030

Irving, TX
Tel: 972-915-6041

West

Milpitas, CA
Tel: 408-433-9950

Mexico

Guadalajara, Jalisco
Tel: 52-33-3123-2141

Europe

Southern Europe

Sasso Marconi, Italy
Tel: 39-051-939111

Skopje, Macedonia
Tel: 389-2-55-14-623

Central Europe

Landsberg, Germany
Tel: 49-8191-3350800

Kamen, Germany
Tel: 49-2307-438110

Northern Europe

Wyboston, United Kingdom
Tel: 44-1480-273082

Espoo, Finland
Tel: 358-9-5406-5000

Asia

Northeast Asia

Hong Kong
Tel: 852-2305-1168

Shenzhen, China
Tel: 86-755-2518-1306

Beijing, China
Tel: 86-10-5877-1075

Shanghai, China
Tel: 86-21-6447-0707

Seoul, South Korea
Tel: 82-2-6294-0550

Taipei, Taiwan
Tel: 886-2-27528585

Southeast Asia

Singapore
Tel: 65-6701-8033

Penang, Malaysia
Tel: 60-4-6430200

Bangalore, India
Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.

Disclaimer

This product has been made available through a Private Label Agreement and a Development and Cross-Licensing Agreement between KEMET and NEC TOKIN to expand market and product offerings for both companies and their respective customers. For more information, please visit <http://www.kemet.com/nectokin>.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.