


Connectors in 3.81 mm pitch Series BC/SC 3.81

SC 3.81/.. /180

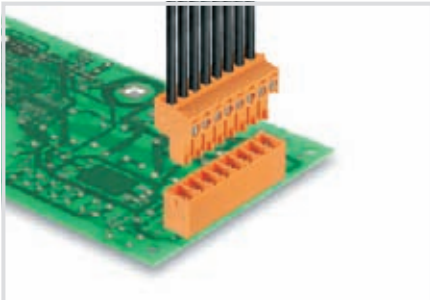

The 180° male header has a perpendicular plugging direction in relation to the circuit board. It is available in closed (G) and screw flange (F) versions.

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

Technical data

In compliance with IEC 60664-1 / IEC 61984				
Clamping range, max.	mm ²			
Solid core H05(07) V-U	mm ²			
Stranded H07 V-R				
Flexible H05(07) V-K	mm ²			
Flexible with ferrule	mm ²			
Ferrule with plastic collar	mm ²			
Stripping length	mm			
Screwdriver blade	mm			
According to norm				
Tightening torque range	Nm			
Rated current, max.	A	17.5	17.5	
At ambient temperature		20°C	40°C	
For conductor cross-section	mm ²			
Overvoltage category		III	III	II
Pollution severity		3	2	2
Rated voltage	V	160	160	320
Rated impulse voltage	kV	2.5	2.5	2.5
UL / CUL (Use Group)		B	C	D
Rated voltage	V	300		300
Rated current	A	10		10
AWG conductor	AWG		-	
CSA (Use Group)		B	C	D
Rated voltage	V	300		300
Rated current	A	10		10
AWG conductor	AWG		-	
General data				
Type of insulation material		PA GF		
Flammability class UL 94		V-0		
Contact base material		Copper alloy		
Material of contact surface		tinned		
Pin dimensions = d	mm	1.0, Octagonal		
Solder eyelet Ø = D	mm	1.2		
Solder eyelet Ø tolerance	mm	+ 0,1		

Product data

IEC: 320 V / 17.5 A
UL: 300 V / 10 A

For additional articles and information, refer to catalog.weidmueller.com


Note:

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- P on drg. = pitch

SC 3.81/.. /180G



Dimensioned drawing

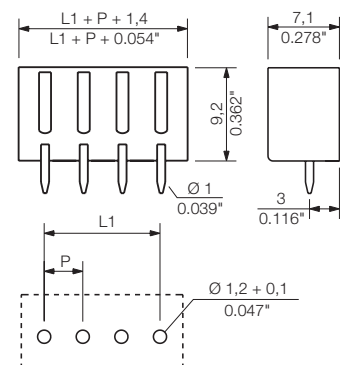

Accessories

Note: Refer to the Accessories chapter for additional accessories.

Coding		Order No.
	SC-SMT 3.81 KO GR	1968900000
	PTSC KA 22X4.5	1610740000

Ordering data

Solder pin length			3.2 mm	3.2 mm	
Colour			orange	black	
Pitch 3.81 mm					
Pol.	L1	(inch)	Qty.	Order No.	Order No.
2	3.81	0.150	50	1942840000	1793520000
3	7.62	0.300	50	1942850000	1793530000
4	11.43	0.450	50	1942860000	1793540000
5	15.24	0.600	50	1942870000	1793550000
6	19.05	0.750	50	1942880000	1793560000
7	22.86	0.900	50	1942890000	1871490000
8	26.67	1.050	50	1942900000	1793570000
9	30.48	1.200	50	1942910000	1871470000
10	34.29	1.350	50	1942920000	1793580000
11	38.10	1.500	50	1942930000	1943100000
12	41.91	1.650	50	1942940000	1793590000
13	45.72	1.800	50	1942950000	1943110000
14	49.53	1.950	50	1942960000	1943120000
15	53.34	2.100	50	1942970000	1943130000
16	57.15	2.250	50	1942980000	1793600000
17	60.96	2.400	50	1942990000	1943140000
18	64.77	2.550	50	1943000000	1943150000
19	68.58	2.700	50	1943010000	1943160000
20	72.39	2.850	50	1943020000	1943170000