


REV	ECN	APP'D
-	4503	10/31/01
A	5742	EN 12/28/05

SCFF SERIES PART NUMBERING SCHEME

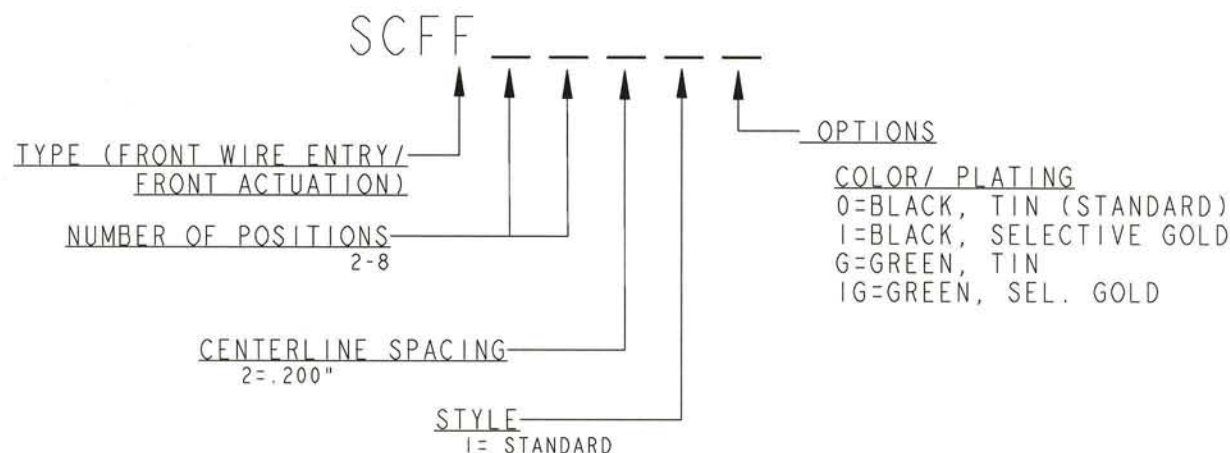

RATINGS

CURRENT - 15 A
VOLTAGE - 300V
U.L. FILE NO. PENDING



RATINGS

CURRENT - 15 A
VOLTAGE - 300 V
CSA FILE NO. PENDING

DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992

CURRENT -15 A
VOLTAGE - 300 V
TUV FILE NO. PENDING

CONSULT PCD FOR PART NO. AND
AVAILABILITY OF FOLLOWING OPTIONS:
*CUSTOM COLORS *CUSTOM KEYING
*CUSTOM MARKING *SELECTIVE CONTACT LOADING
*NUMBER OF POSITIONS 9-24

INSTALLATION RECOMMENDATIONS:

WIRE RANGE: AWG #12-28, STRANDED OR SOLID,
WIRE STRIP LENGTH: .250" (6,35mm)




MATERIALS:

HOUSING: PPO, UL 94 V-0
CONTACT: PHOSPHOR BRONZE, TIN FINISH
SPRING CLAMP: STAINLESS STEEL

MAX OPERATING TEMP: 105°C

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION	Amphenol Pcd	TITLE SCF SERIES PLUGGABLE TERMINAL BLOCK					
ORIGINAL STAMPED IN RED THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD, INC. PEABODY MA USA			ENGR C. LUSHUA 7/17/01	SIZE A			DWG NO. SCFF02210		REV A
			CHKD A. PATRIE 10/30/01						
			APPD I. QUINN 10/31/01	CODE: 58982		SCALE: NONE	SHEET 1 OF 2		

L=NUM OF POS X CL SPACING
A=NUM OF POS X CL SPACING+.060

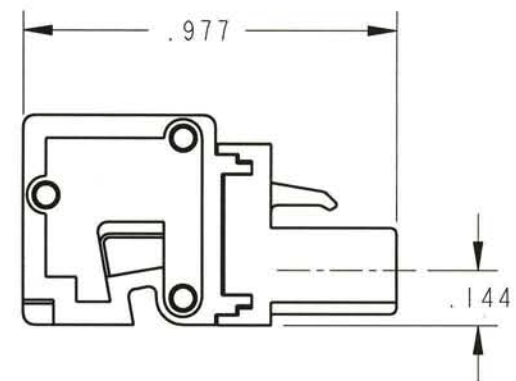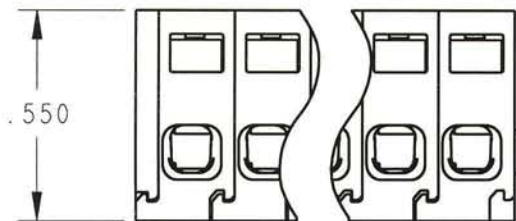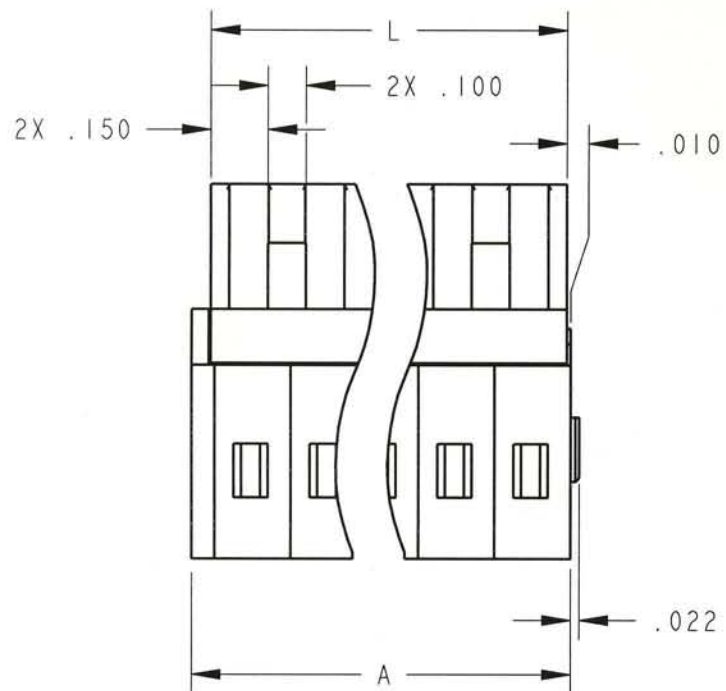

SIZE	DWG NO.	REV
A	SCFF02210	A
CODE: 58982	SCALE: NONE	SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SCFF06210](#) [SCFF05210](#) [SCFF03210](#) [SCFF07210](#) [SCFF02210](#) [SCFF08210](#)