EIKO CERTIFIED GREEN

LITESPANLED

SCSS - LED Surface Canopy Square, Small

project name	type
catalog number	
comments	voltage
approved by	date

34/58 watts

2976/ 5524 lumens

87/95 lpw

3.75" depth

features

- Die cast aluminum body
- UV Stabilized TGIC carbon bronze powder coat finish (standard)
- UL/cUL Listed for wet locations
- Unique quick mount design
- Frosted PC impact-resistant lens provides uniform lighting
- Low starting temp: -40°C
- 5000K color temperature
- 5 year limited warranty
- Extremely low profile: 3.75"

performance

- SCSS-1C-U – 2976 lumens @ 34W, 87lpw
- SCSS-2C-U – 5524 lumens @ 58W, 95lpw
- Consumes 1/3 the energy and lasts 3x longer than comparable HID
- UL/cUL Listed for wet locations
- 120~277V
- CCT: 5000K +/- 250K
- Typical +70 CRI

applications

- Strip malls
- Entryways
- Garages
- Plazas
- Utility Closets
- Public Restrooms
- Eaves

ordering information

Order Code	Litespan Part #	Series	Configuration	CCT	Finish	Voltage	HID Equivalent
08787	✓ **SCSS-1C-U**	**SCSS** - Surface Canopy Square, Small	**1C** - 34W, 2976LM	(Omit) 5000K *Standard*	(Omit) Bronze Standard	**U** - 120-277V	50-175W
09004	✓ **SCSS-2C-U**	**SCSS** - Surface Canopy Square, Small	**2C** - 58W, 5524LM	(Omit) 5100K *Standard*	(Omit) Bronze Standard	**U** - 120-277V	175-250W

✓ *DesignLights Consortium™ Qualified*

DLC QPL LISTED · c UL us · WET LOCATION RATED · INSTANT ON · 5 YR WARRANTY · 70 CRI (Ra) · 50,000 LIFETIME HRS

EIKO CERTIFIED GREEN

LITESPANLED

SCSS - LED Surface Canopy Square, Small

dimensions

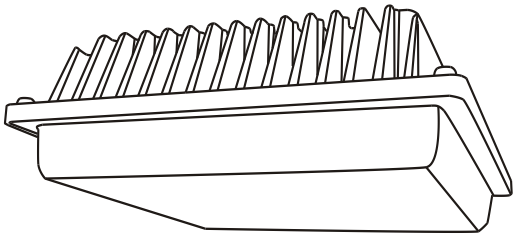

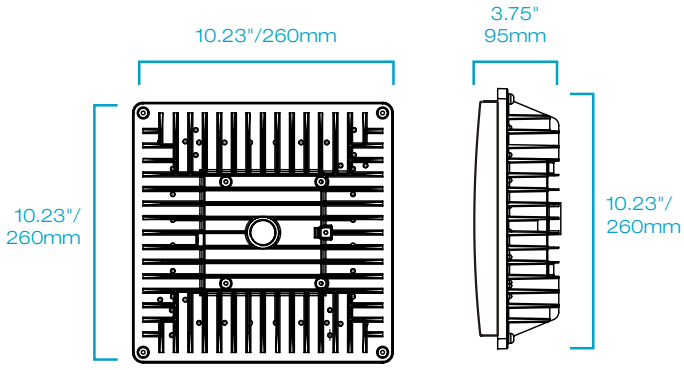

contractor
friendly
"easy mount"
solution

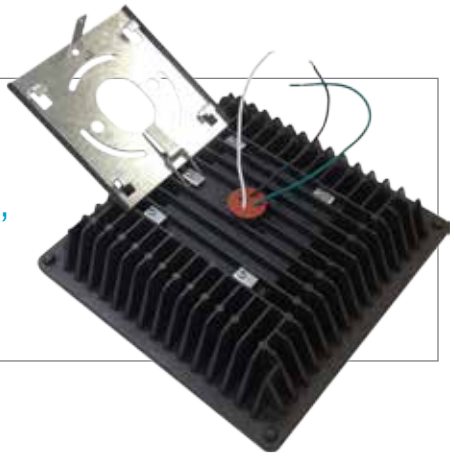

watch > like > follow

selection. solutions. simplicity. eiko.com

23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335

Rev. 9/21/15

Surface Canopy Square Small					
Ordering Code	**Watts**	**Volts**	**Lumens**	**Life Hours**	**Approvals**
SCSS-1C-U	34	120~277 VAC	2976		UL, cUL, DLC
SCSS-2C-U	58	120~277 VAC	5524	50000	UL, cUL, DLC

NOTES: