



1000W Single Output DC-DC Converter

SD-1000 series



■ Features :

- 1U low profile 41mm
- High power density 10.7w/inch³
- 2000VAC I/O Isolation
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output OK signal
- Built-in remote ON-OFF control
- Built-in remote sense function
- Forced air cooling by built-in DC fan with fan speed control
- 12V, 0.25A auxiliary output
- 3 years warranty


CB CE

SPECIFICATION

MODEL		SD-1000L-12	SD-1000L-24	SD-1000L-48	SD-1000H-12	SD-1000H-24	SD-1000H-48
OUTPUT	DC VOLTAGE	12V	24V	48V	12V	24V	48V
	RATED CURRENT	60A	40A	21A	60A	40A	21A
	CURRENT RANGE	0 ~ 60A	0 ~ 40A	0 ~ 21A	0 ~ 60A	0 ~ 40A	0 ~ 21A
	RATED POWER	720W	960W	1008W	720W	960W	1008W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	11 ~ 15V	23 ~ 30V	46 ~ 60V	11 ~ 15V	23 ~ 30V	46 ~ 60V
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
SETUP, RISE TIME		500ms, 50ms at full load					
INPUT	VOLTAGE RANGE Note.5	19 ~ 72VDC			72 ~ 144VDC		
	EFFICIENCY (Typ.)	84%	88%	90%	85%	89%	92%
	DC CURRENT (Typ.)	23.5A/48VDC			11.6A/96VDC		
	INRUSH CURRENT (Typ.)	-----			100A/96VDC		
PROTECTION	OVERLOAD	105 ~ 125% rated output power Protection type : Constant current limiting, unit will shut down o/p voltage after about 5sec. Re-power on to recover					
	OVER VOLTAGE	16 ~ 19V	30.8 ~ 35.2V	62 ~ 68V	16 ~ 19V	30.8 ~ 35.2V	62 ~ 68V
	OVER TEMPERATURE	85℃±5℃ (TSW2) detect on heatsink of O/P diode; 75℃±5℃ (TSW1) detect on heatsink of power transistor Protection type : Shut down o/p voltage, recovers automatically after temperature goes down					
	REMOTE ON/OFF CONTROL	Please refer to function manual					
FUNCTION	OUTPUT OK SIGNAL	Open collector signal low when PSU turns on, maximum, sink current :10mA					
	WORKING TEMP.	-20 ~ +60℃ (Refer to output load derating curve)					
ENVIRONMENT	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.02%/℃ (0 ~ 50℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 4)	SAFETY STANDARDS	IEC60950-1 CB approved by TUV					
	WITHSTAND VOLTAGE	I/P-O/P:2KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC 25℃ 70%RH					
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22)					
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,6,8; ENV50204, light industry level, criteria A					
OTHERS	MTBF	32K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	295*127*41mm (L*W*H)					
	PACKING	1.94Kg; 6pcs/12.6Kg/0.99CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 48, 96VDC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Derating may be needed under low input voltages. Please check the derating curve for more details.						

Mechanical Specification

Case No. 952B Unit:mm

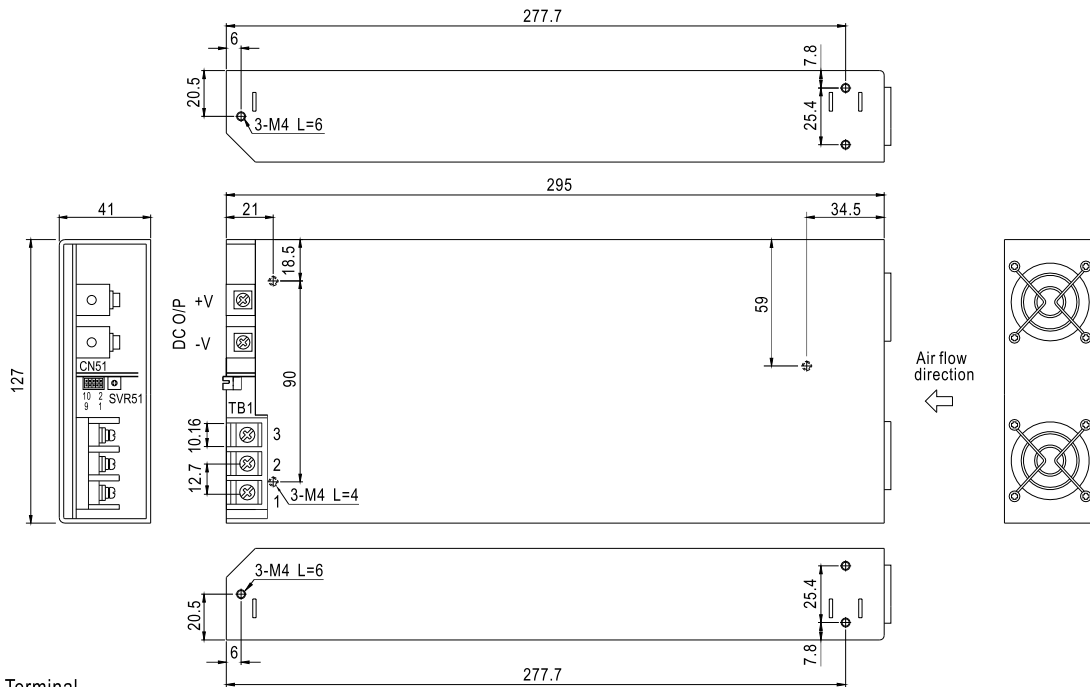


DC Input Terminal
Pin No. Assignment

Pin No.	Assignment
1	DC INPUT V+
2	DC INPUT V-
3	FG $\perp$


Control pin number assignment (CN51) : JST B10B-PHDSS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	+S	5	AUX	9	RCG	JST PHDR-10VS or equivalent	JST SPHD-002T-P0.5 or equivalent
2	-S	6	AUXG	10	NC		
3	OUTPUT OK	7	RC1				
4	GND	8	RC2				


Block Diagram

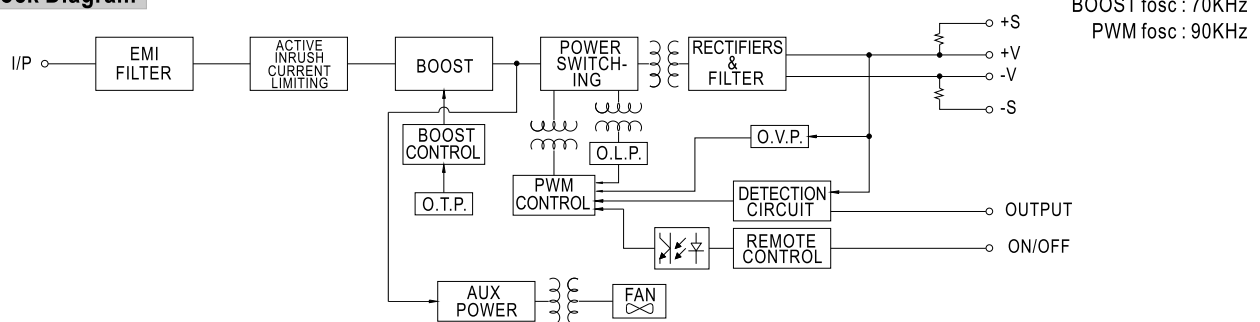

Derating Curve

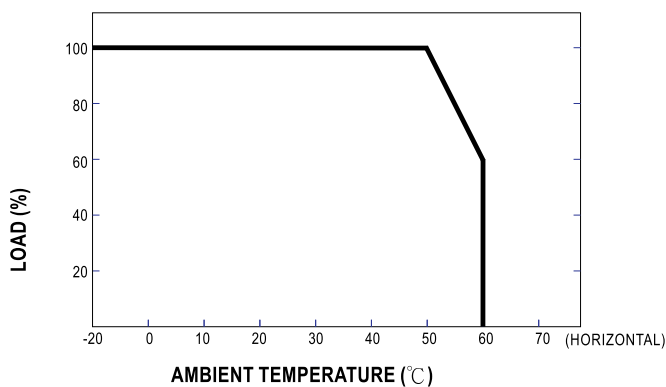

Static Characteristics

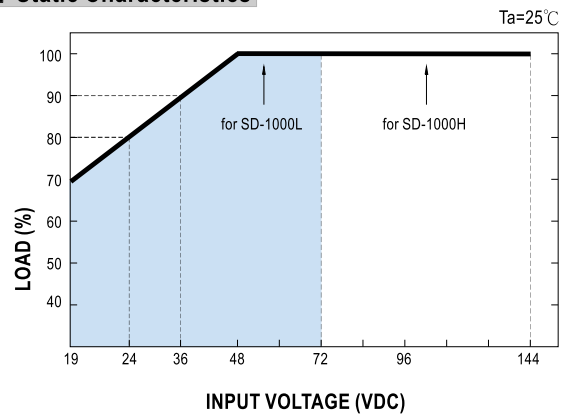

Function Description of CN51

Pin No.	Function	Description
1	+S	Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V.
2	-S	Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V.
3	O/P OK	Open collector signal, referenced to pin4(GND). Low when PSU turns on. The maximum sink current is 10mA and the maximum external voltage is 13V.
4	GND	These pins connect to the negative terminal (-V).
5	AUX	Auxiliary voltage output, 10.8~13.2V referenced to pin6(AUXG).The maximum load current is 0.25A.
6	AUXG	Auxiliary voltage output ground. The signal return is isolated from the output terminals(+V & -V).
7	RC1	Remote ON/OFF
8	RC2	Remote ON/OFF
9	RCG	Remote ON/OFF ground
10	NC	No connection

Function Manual

1.Remote ON/OFF


- (1)Remote ON/OFF control becomes available by applying voltage in CN51
- (2)Table 1.1 shows the specification of Remote ON/OFF function
- (3)Fig.1.2 shows the example to connect Remote ON/OFF control function

Table 1.1 Specification of Remote ON/OFF


Connection Method	Fig. 1.2(A)	Fig. 1.2(B)	Fig. 1.2(C)
SW Logic	Output on	SW Open	SW Close
	Output off	SW Close	SW Open

Fig.1.2 Examples of connecting remote ON/OFF


(A)Using external voltage source

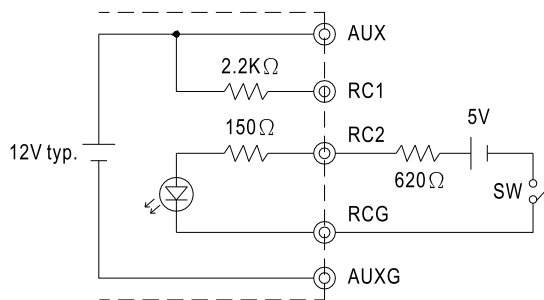

(B)Using internal 12V auxiliary output

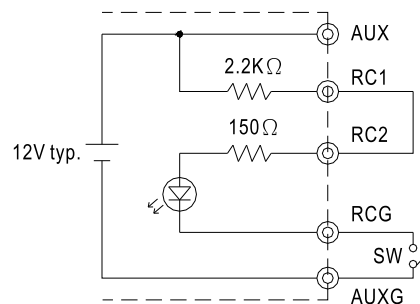

(C)Using internal 12V auxiliary output

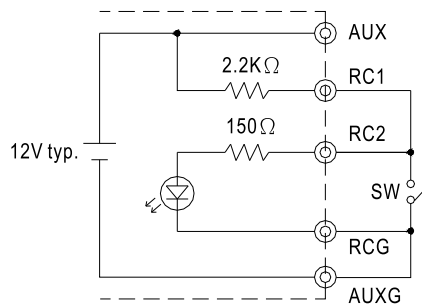



MODEL : SD-1000L-48

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1: 150 mVp-p (Max)	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	V1: 42 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1:46 V~ 60 V	I/P: 48 VDC O/P:MIN LOAD Ta:25°C	43.64 V~ 61.57 V	P
3	OUTPUT VOLTAGE TOLERANCE	V1: 1%~ -1 % (Max)	I/P: 48 VDC / 72VDC O/P:FULL/ MIN LOAD Ta:25°C	V1: 0.02 %~- -0.02 %	P
4	LINE REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 48VDC ~ 72VDC O/P:FULL LOAD Ta:25°C	V1: 0.02 %~- -0.02 %	P
5	LOAD REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 48 VDC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.02 %~- -0.02 %	P
6	SET UP TIME	500 ms (Max)	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	97 ms	P
7	RISE TIME	50 ms (Max)	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	29 ms	P
8	OVER/UNDERSHOOT TEST	< $\pm 5\%$	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	TEST: < 5 %	P
9	DYNAMIC LOAD	V1: 4800 mVp-p	I/P: 48 VDC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25°C	908 mVp-p	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	19VDC~ 72 VDC	I/P:TESTING O/P:LOW LINE /70% LOAD HIGH LINE /FULL LOAD Ta:25°C	17.9 V~ 72 V	P
			I/P: LOW-LINE-0.2V= 18.8V O/P:70%/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE) HIGH-LINE+5%= 75 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK	
2	EFFICIENCY	90 % (TYP)	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	90.9 %	P
3	INPUT CURRENT	23.5 A/ 48 V (TYP)	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	I = 23.2 A	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	105 %~ 125 %	I/P: 48VDC O/P:TESTING Ta:25°C	117 % Constant Current Limiting, unit will shut down o/p voltage above 5sec Re-power on to recover	P
2	OVER VOLTAGE PROTECTION	CH1: 62V~ 68V	I/P: 48VDC O/P:MIN LOAD Ta:25°C	63.6 V Shunt down Re- power ON	P
3	OVER TEMPERATURE PROTECTION	SPEC: 75°C ± 5°C OT.P. (TSW1) 85°C ± 5°C OT.P. (TSW2) NO DAMAGE	I/P: 48 VDC O/P:FULL LOAD	O.T.P. Active Shut down o/p volotage , recovers automatically after temperature goes down	P
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 72 VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE Constant Current Limiting, unit will shut down o/p voltage above 5sec Re-power on to recover	P

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	FAN SPEED CONTROL	0%LOAD=6V~8.5V 100%LOAD=11.8V~12.8V	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	Fan Voltage= 7.3 V/ NO LOAD Fan Voltage= 12.31 V/ 100%LOAD	P
2	REMOTE CONTROL	Rc+ / Rc- POWER ON:OPEN BETWEEN ON/OFF POWER OFF:SHORT BETWEEN ON/OFF (A) Using External Voltage Source (B) Using Internal 12V Auxiliary Output (C) Using Internal 12V Auxiliary Output.	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	(A)OK (B)OK (C)OK	P
3	REMOTE SENSE	>0.3V	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	> 0.3 V	P
4	OUTPUT OK SIGNAL	OPEN COLLECTOR SIGNAL LOW WHEN PSU TURN ON,MAX.SINK CURRENT 10mA,external voltage is 13V 0~0.5V OUTPUT STATUS ON 12~13V OUTPUT STATUS OFF	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	SINK CURRENT: 10 mA OUTPUT STATUS ON= 0 V OUTPUT STATUS OFF=12.56 V	P
5	FAN LOCK	SHUTDOWN RE-POWER ON	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	SHUTDOWN RE-POWER ON	P
6	AUX POWER	0~0.25A(10.8V~13.2V)	I/P: 48 VDC Ta:25°C	12.88V/0A 12.71V/0.25A	P
7	DC I/P UVP	17V~18.7V	O/P:70% LOAD Ta:25°C	17.9VDC	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																																																																																			
1	TEMPERATURE RISE TEST	MODEL : SD-1000L-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P: 48 VDC O/P: FULL LOAD Ta= 29.6℃ 2. HIGH AMBIENT BURN-IN : 2HRS I/P: 48 VDC O/P: FULL LOAD Ta= 53.6℃ <table><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 29.6 ℃</th><th>HIGH AMBIENT Ta= 53.6 ℃</th></tr><tr><td>1</td><td>U2</td><td>UCC28220D</td><td>46.6℃</td><td>65.0℃</td></tr><tr><td>2</td><td>D2</td><td>60CPQ150 60A/150V</td><td>44.0℃</td><td>64.6℃</td></tr><tr><td>3</td><td>Q3</td><td>IRFP3710 57A/100V</td><td>53.3℃</td><td>69.3℃</td></tr><tr><td>4</td><td>Q1</td><td>IRFP3710 57A/100V</td><td>50.0℃</td><td>73.8℃</td></tr><tr><td>5</td><td>TSW1</td><td>ST-22 75℃</td><td>42.2℃</td><td>63.1℃</td></tr><tr><td>6</td><td>LF1</td><td>TR-757</td><td>51.3℃</td><td>72.3℃</td></tr><tr><td>7</td><td>C8</td><td>1000U/100V 105℃ MXR</td><td>50.7℃</td><td>71.2℃</td></tr><tr><td>8</td><td>T2 COIL</td><td>TF-1684</td><td>66.2℃</td><td>87.9℃</td></tr><tr><td>9</td><td>D901</td><td>S3L60 2.2A/600V</td><td>56.9℃</td><td>78.1℃</td></tr><tr><td>10</td><td>L2</td><td>TF-1655</td><td>59.5℃</td><td>79.3℃</td></tr><tr><td>11</td><td>U9</td><td>TNY280PN</td><td>58.8℃</td><td>80.7℃</td></tr><tr><td>12</td><td>ZD10</td><td>P6KE100A</td><td>56.5℃</td><td>78.3℃</td></tr><tr><td>13</td><td>U1</td><td>IR1150IS(PbF)</td><td>39.6℃</td><td>60.1℃</td></tr><tr><td>14</td><td>Q903</td><td>IRFP260N 50A/200V</td><td>66.6℃</td><td>91.5℃</td></tr><tr><td>15</td><td>C73</td><td>10U/50V 105℃ KY</td><td>54.9℃</td><td>76.1℃</td></tr><tr><td>16</td><td>L100</td><td>TF-1455</td><td>58.6℃</td><td>80.1℃</td></tr><tr><td>17</td><td>Q161</td><td>TIP42C -5A/100V</td><td>51.0℃</td><td>72.8℃</td></tr><tr><td>18</td><td>TSW2</td><td>ST-22 90℃</td><td>61.1℃</td><td>85.9℃</td></tr><tr><td>19</td><td>D102</td><td>ESAD83-006 30A/60V</td><td>70.4℃</td><td>92.0℃</td></tr><tr><td>20</td><td>PCB</td><td>T2 與 ZD10 間</td><td>59.4℃</td><td>82.2℃</td></tr><tr><td>21</td><td>內 TA</td><td>C303 上方處</td><td>43.8℃</td><td>64.5℃</td></tr><tr><td>22</td><td>C113</td><td>1000U/35V 105℃ YXG</td><td>58.1℃</td><td>78.9℃</td></tr></table>			NO	Position	P/N	ROOM AMBIENT Ta= 29.6 ℃	HIGH AMBIENT Ta= 53.6 ℃	1	U2	UCC28220D	46.6℃	65.0℃	2	D2	60CPQ150 60A/150V	44.0℃	64.6℃	3	Q3	IRFP3710 57A/100V	53.3℃	69.3℃	4	Q1	IRFP3710 57A/100V	50.0℃	73.8℃	5	TSW1	ST-22 75℃	42.2℃	63.1℃	6	LF1	TR-757	51.3℃	72.3℃	7	C8	1000U/100V 105℃ MXR	50.7℃	71.2℃	8	T2 COIL	TF-1684	66.2℃	87.9℃	9	D901	S3L60 2.2A/600V	56.9℃	78.1℃	10	L2	TF-1655	59.5℃	79.3℃	11	U9	TNY280PN	58.8℃	80.7℃	12	ZD10	P6KE100A	56.5℃	78.3℃	13	U1	IR1150IS(PbF)	39.6℃	60.1℃	14	Q903	IRFP260N 50A/200V	66.6℃	91.5℃	15	C73	10U/50V 105℃ KY	54.9℃	76.1℃	16	L100	TF-1455	58.6℃	80.1℃	17	Q161	TIP42C -5A/100V	51.0℃	72.8℃	18	TSW2	ST-22 90℃	61.1℃	85.9℃	19	D102	ESAD83-006 30A/60V	70.4℃	92.0℃	20	PCB	T2 與 ZD10 間	59.4℃	82.2℃	21	內 TA	C303 上方處	43.8℃	64.5℃	22	C113	1000U/35V 105℃ YXG	58.1℃	78.9℃	P
NO	Position	P/N	ROOM AMBIENT Ta= 29.6 ℃	HIGH AMBIENT Ta= 53.6 ℃																																																																																																																				
1	U2	UCC28220D	46.6℃	65.0℃																																																																																																																				
2	D2	60CPQ150 60A/150V	44.0℃	64.6℃																																																																																																																				
3	Q3	IRFP3710 57A/100V	53.3℃	69.3℃																																																																																																																				
4	Q1	IRFP3710 57A/100V	50.0℃	73.8℃																																																																																																																				
5	TSW1	ST-22 75℃	42.2℃	63.1℃																																																																																																																				
6	LF1	TR-757	51.3℃	72.3℃																																																																																																																				
7	C8	1000U/100V 105℃ MXR	50.7℃	71.2℃																																																																																																																				
8	T2 COIL	TF-1684	66.2℃	87.9℃																																																																																																																				
9	D901	S3L60 2.2A/600V	56.9℃	78.1℃																																																																																																																				
10	L2	TF-1655	59.5℃	79.3℃																																																																																																																				
11	U9	TNY280PN	58.8℃	80.7℃																																																																																																																				
12	ZD10	P6KE100A	56.5℃	78.3℃																																																																																																																				
13	U1	IR1150IS(PbF)	39.6℃	60.1℃																																																																																																																				
14	Q903	IRFP260N 50A/200V	66.6℃	91.5℃																																																																																																																				
15	C73	10U/50V 105℃ KY	54.9℃	76.1℃																																																																																																																				
16	L100	TF-1455	58.6℃	80.1℃																																																																																																																				
17	Q161	TIP42C -5A/100V	51.0℃	72.8℃																																																																																																																				
18	TSW2	ST-22 90℃	61.1℃	85.9℃																																																																																																																				
19	D102	ESAD83-006 30A/60V	70.4℃	92.0℃																																																																																																																				
20	PCB	T2 與 ZD10 間	59.4℃	82.2℃																																																																																																																				
21	內 TA	C303 上方處	43.8℃	64.5℃																																																																																																																				
22	C113	1000U/35V 105℃ YXG	58.1℃	78.9℃																																																																																																																				
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 48 VDC O/P: 113 % LOAD Ta:25℃	TEST : OK	P																																																																																																																			
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 48 VDC O/P: 100% LOAD Ta= -20℃	TEST : OK	P																																																																																																																			
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50℃ NO DAMAGE	I/P: 72 VDC O/P:FULL LOAD Ta= 50℃ HUMIDITY= 95 %R.H	TEST : OK	P																																																																																																																			
5	TEMPERATURE COEFFICIENT	± 0.02%(0~50℃)	I/P: 48VDC O/P:FULL LOAD	± 0.013 %(0~50℃)	P																																																																																																																			
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10~500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25℃		TEST : OK	P																																																																																																																			

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 2 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 0.5 KVAC/min	I/P-O/P: 2.4 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25℃ / 70%RH	I/P-O/P: 4.85 mA I/P-FG: 4.59 mA O/P-FG: 4.59 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P: 9 GΩ I/P-FG: 2.13 GΩ O/P-FG: 30 GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25℃ / 70%RH	8mΩ	P
4	APPROVAL	TUV: Certificate NO : UL: File NO :			N/A

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RADIATION	EN55022 CLASS B	I/P: 48VDC O/P:FULL LOAD Ta:25℃	PASS Test by certified Lab	P
2	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 48 VDC O/P:FULL LOAD Ta:25℃	CRITERIA A	P
3	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 48VDC O/P:FULL LOAD Ta:25℃	CRITERIA A	P
4	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :0.5KV L,N-PE:0.5KV	I/P: 48 VDC O/P:FULL LOAD Ta:25℃	CRITERIA A	P
5	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SD-1000L-24 : SUPPOSE C113 IS THE MOST CRITICAL COMPONENT I/P: 48VDC O/P:FULL LOAD Ta=50 °C LIFE TIME= 251623 HRS I/P: 48VDC O/P:FULL LOAD Ta=50 °C LIFE TIME= 55554 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 32KHRS			P
3	ORT (Ongoing Reliability test)	SD-1000L-48:I/P : 230VAC O/P : FULL LOAD TA=50℃ Sample=5pcs TEST TIME=2544HRS			P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 900 Rated IRFP260N: 200 V 50 A	I/P: High-Line +3V = 75 V O/P: (1) Full Load Turn on (2) Output Short Ta: 25°C	(1) 198 V (2) 225 V	P
2	Diode Peak Voltage	D101 Rated ESAD92-02 20A/200V	I/P: High-Line +3V = 72V O/P: (1) Full Load Turn on (2) Output Short Ta: 25°C	(1) 152 V (2) 84 V	P
3	Clamp Diode Peak Voltage	D 900 Rated S3L60 2.2A/600V	I/P: High-Line +3V = 75 V O/P: (1) Dynamic Load 90%Duty/1KHz Ta: 25°C	(1) 157 V	P
4	Input Capacitor Voltage	C5 Rated 1000u /100 V /105°C	I/P: High-Line +3V = 75 V O/P: (1) Full Load Turn on /Off (2) Min load Turn on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 80 V (2) 80 V (3) 80 V	P
5	Control IC Voltage Test	U2 Rated UCC28220: 8V~14 V	I/P: High-Line +3V = 75 V O/P: (1) Full Load Turn on /Off (2) Min load Turn on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 13.68 V (2) 13.64 V (3) 13.68 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2007/9/14	RD SAMPLE	PASS	VINCENT TSENG	MAX LIN
2007/11/16	PRODUCT SAMPLE W0710C50	PASS	VINCENT TSENG	MAX LIN
2008/1/10	PRODUCT SAMPLE W0712C58	PASS	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023