

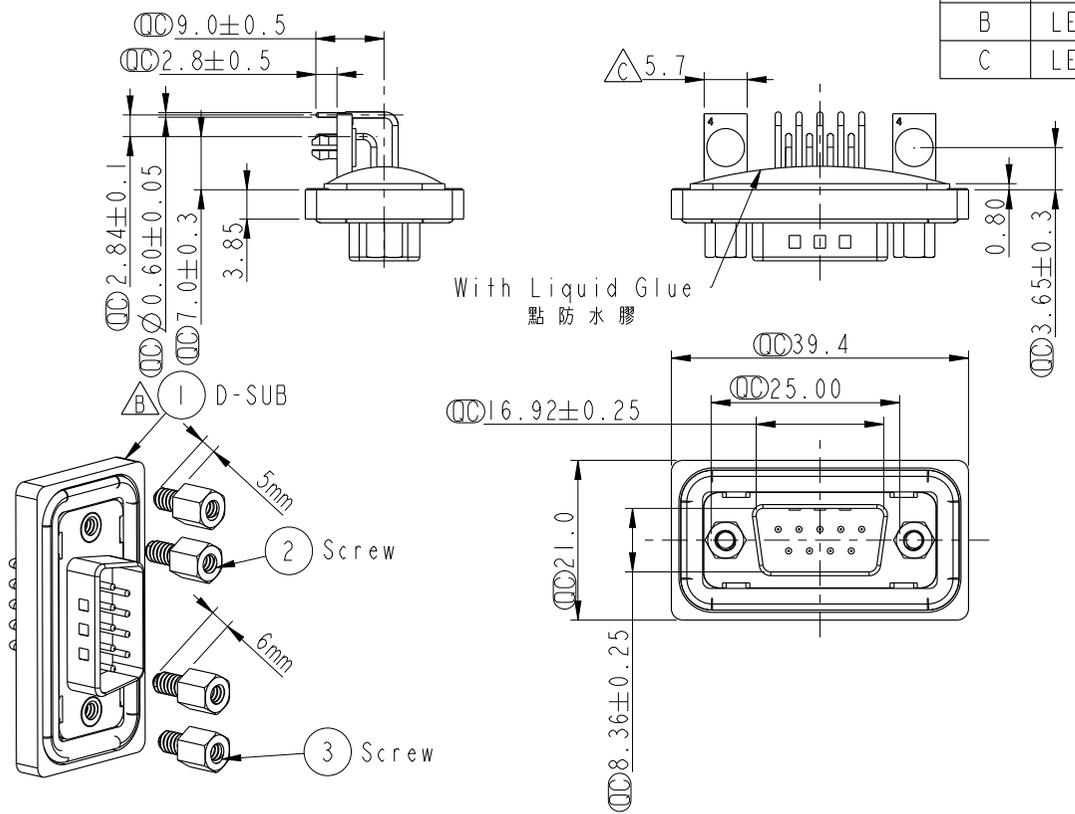



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710075	2006/12/18	DongYaLi	Move O-Ring To ZSE00100717
C	LEN1350210	2013/05/14	Yulong	Change the Dimension



Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為1.2mm以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

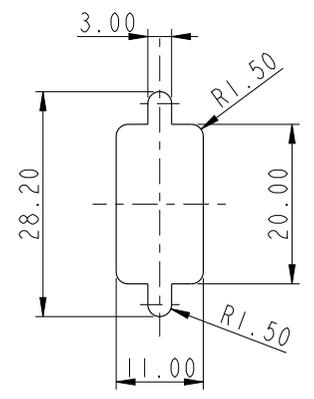

Recommended Panel Cut-Out

建議挖孔尺寸

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate : IP68
 - IP68: 1M of depth of water 24 hours (防水等級: IP68)
 - (IP68: 1米水深24小時)
 - * Do Mating Test After Glued
 - 點膠後, 須作對插測試
 - * HD-SUB Conn. : Black Core, PBT
 - * Plastic Jacket : Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Ring: Light Blue, Silicone
 - * Screw: Copper Alloy, Nickel Plated, #4-40 UNC
 - * The 90° Board Lock Needs To Connect The Iron Shell
 - L型支架需接鐵殼

9 Pin Male Connector PCB Pin Layout
Max. Distance From The Circuit Board Edge
距離PCB板邊最大尺寸

UNIT: mm		TITLE		ITEM NO.		DRAWN BY		DATE	
		DB9/M Conn, Panel, PCB 90° Add Board Lock		SDB-09PMMP-SB8001		Yulong_wang		2013-05-14	
TOLERANCE		SCALE	SIZE	SHEET	DWG NO	CHECKED BY	DATE		
.X ±0.25		1:1	A4	1 OF 1	SDB-09PMMP-SB8001	Victor	2013-05-14		
.XX ±0.1		REV.	WC-REV.		CUSTOMER	APPROVED BY	DATE		
.XXX ±0.05		C	A.4		ALTW	Maslow	2013-05-14		
ANGLES ±1°		\varnothing : Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.