


SDP8405

Silicon Phototransistor

FEATURES

- T-1 plastic package
- 20° (nominal) acceptance angle
- Consistent optical properties
- Wide sensitivity ranges
- Mechanically and spectrally matched to SEP8505/8525 and SEP8705 infrared emitting diodes

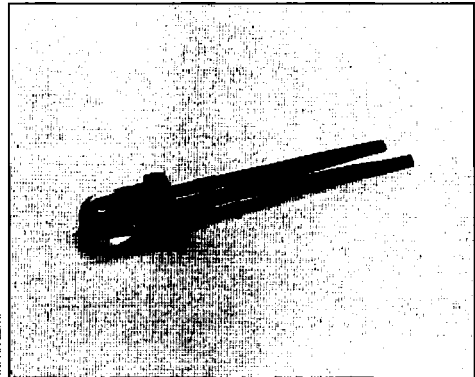


DESCRIPTION

The SDP8405 is an NPN silicon phototransistor transfer molded in a T-1 clear plastic package. Transfer molding of this device assures superior optical centerline performance compared to other molding processes. Lead lengths are staggered to provide a simple method of polarity identification.

OUTLINE DIMENSIONS in inches (mm)

Tolerance	3 plc decimals	$\pm 0.005(0.12)$
	2 plc decimals	$\pm 0.020(0.51)$

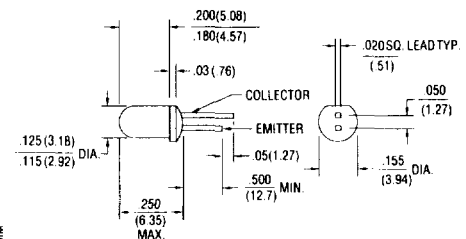

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

SDP8405

Silicon Phototransistor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Light Current	I_L				mA	$V_{CE}=5\text{ V}$ $H=5\text{ mW/cm}^2(1)$
SDP8405-001		1.00				
SDP8405-002		7.00		14.0		
SDP8405-003		12.0		24.0		
Light Current	I_L				mA	$V_{CE}=5\text{ V}$ $H=0.25\text{ mW/cm}^2(2)$
SDP8405-011		0.16				
SDP8405-012		0.16	0.46			
SDP8405-013		0.32	0.92			
SDP8405-014		0.64	1.85			
SDP8405-015		1.25				
Collector Dark Current	I_{CEO}			100	nA	$V_{CE}=15\text{ V}$, $H=0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\text{ }\mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\text{ }\mu\text{A}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.4	V	$I_C=I_L/8$
SDP8405-001 to -003						$H=5\text{ mW/cm}^2$
SDP8405-011 to -015						$H=0.25\text{ mW/cm}^2$
Angular Response ⁽³⁾	$\emptyset$		20		degr.	$I_F=\text{Constant}$
Rise And Fall Time	t_r , t_f		15		μs	$V_{CC}=5\text{ V}$, $I_L=1\text{ mA}$ $R_L=1000\text{ }\Omega$

Notes

1. The radiation source is a tungsten lamp operating at a color temperature of 2870°K.
2. The radiation source is an IRED with a peak wavelength of 935 nm.
3. Angular response is defined as the total included angle between the half sensitivity points.

ABSOLUTE MAXIMUM RATINGS


(25°C Free-Air Temperature unless otherwise noted)

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	70 mW ⁽¹⁾
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C

Notes

1. Derate linearly from 25°C free-air temperature at the rate of 0.18 mW/°C.

SCHEMATIC




Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

SDP8405

Silicon Phototransistor

SWITCHING TIME TEST CIRCUIT

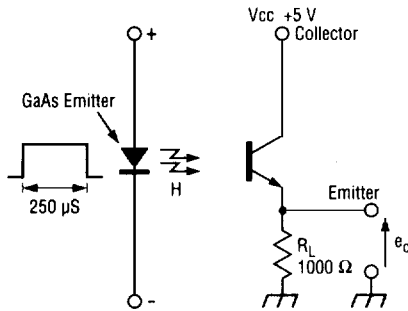

SWITCHING WAVEFORM

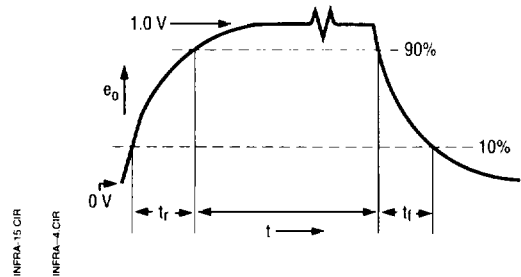


Fig. 1 Responsivity vs Angular Displacement

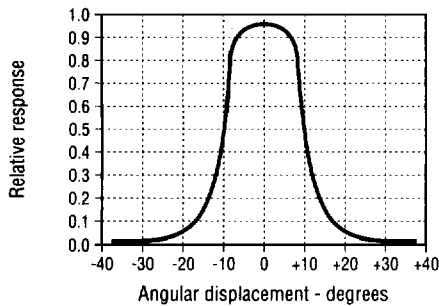


Fig. 2 Collector Current vs Ambient Temperature

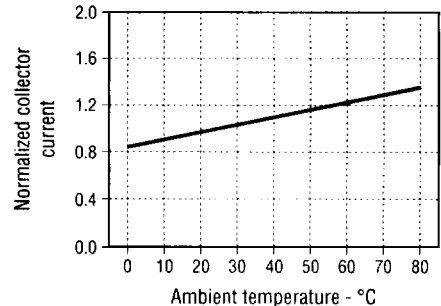


Fig. 3 Dark Current vs Temperature


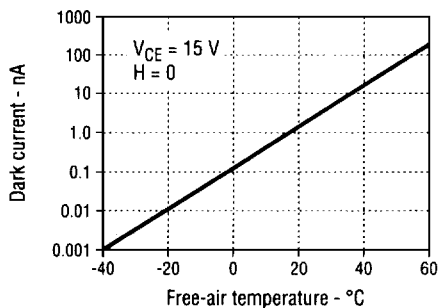


Fig. 4 Non-Saturated Switching Time vs Load Resistance



All Performance Curves Show Typical Values

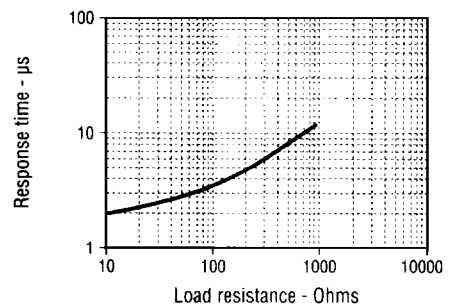


Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

SDP8405


Silicon Phototransistor

Fig. 5 Spectral Responsivity

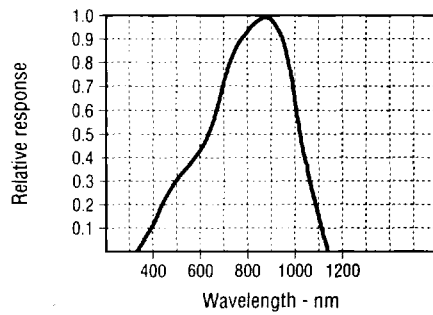

INFRA-36 GBA
INFRA-28 GBA

Fig. 6 Coupling Characteristics with SEP8505

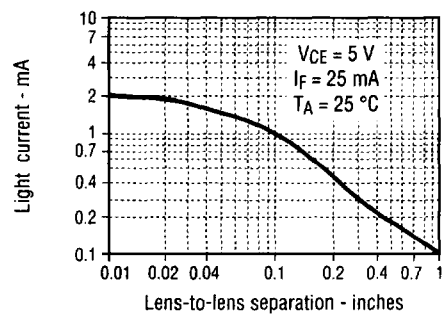

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

