



SFAF1601G - SFAF1608G

Isolated 16.0 AMPS.

Glass Passivated Super Fast Rectifiers

ITO-220AC




Features

- ✧ UL Recognized File # E-326243
- ✧ High efficiency, low VF.
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.


Mechanical Data

- ✧ Cases: ITO-220AC molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds .16", (4.06mm) from case
- ✧ Weight: 1.70 grams

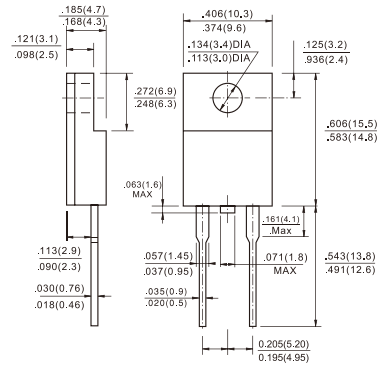

Dimensions in inches and (millimeters)

Marking Diagram



SFAF160XG = Specific Device Code
G = Green Compound
Y = Year
WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SFAF 1601G	SFAF 1602G	SFAF 1603G	SFAF 1604G	SFAF 1605G	SFAF 1606G	SFAF 1607G	SFAF 1608G	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current @Tc = 100 °C	IF(AV)	16.0								A
Peak Forward Surge Current, 8,3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	200								A
Maximum Instantaneous Forward Voltage @ 16.0A	VF	0.975				1.3		1.7		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @TA=25 °C (Note 1) @ TA=100 °C	IR	10 400								uA uA
Maximum Reverse Recovery Time (Note 4)	Trr	35								nS
Typical Junction Capacitance (Note 2)	Cj	130				100				pF
Typical Thermal Resistance C (Note 3)	RθJC	1.3								°C/W
Operating Temperature Range	TJ	-65 to +150								°C
Storage Temperature Range	TSTG	-65 to +150								°C

- Notes:
1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 3. Mounted on Heatsink Size of 3" x 5" x 0.25" Al-Plate.
 4. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Version: D10

RATINGS AND CHARACTERISTIC CURVES (SFAF1601G THRU SFAF1608G)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

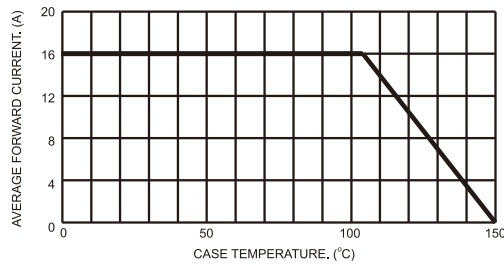


FIG.2- TYPICAL REVERSE CHARACTERISTICS

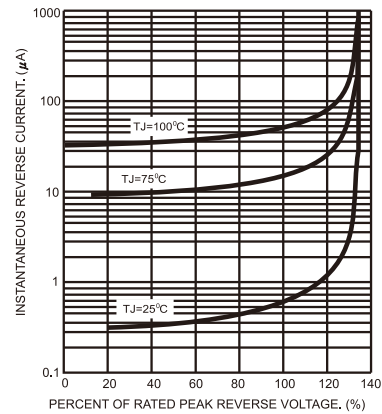


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

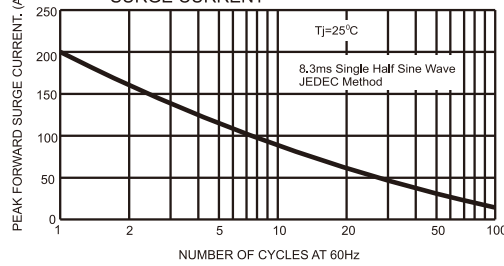


FIG.5- TYPICAL FORWARD CHARACTERISTICS

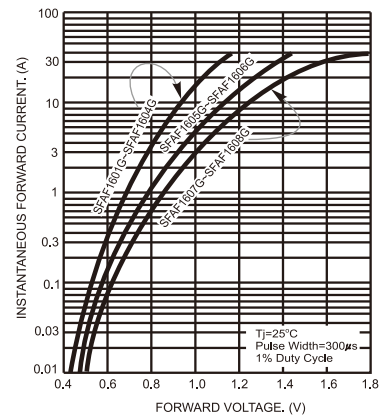


FIG.4- TYPICAL JUNCTION CAPACITANCE

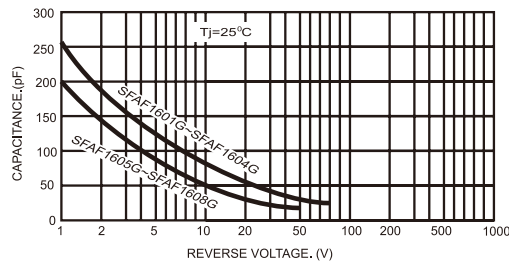


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

