




TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±0.2

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0186	H.T	'04/8/9
B	Changed Cat. No.	J04-0454	H.T	'05/2/7
C	Added the heat resistance	J05-0710	H.T	'05/10/21
D	Changed tolerance	J06-0064	H.T	'06/2/23

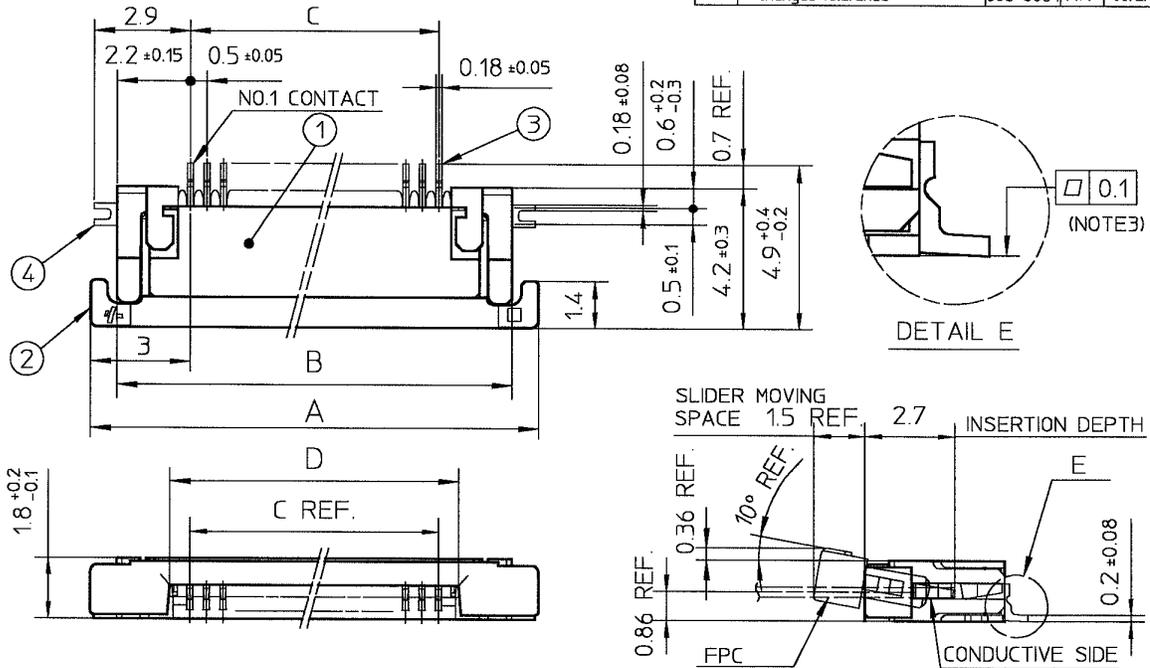


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	POLYAMIDE RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER	PPS RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BROWN
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : GOLD
4	MOUNTING PLATE		2	PLATING : LEAD FREE

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR MOUNTING PLATE  
FIXING

n : NO. OF CONTACTS

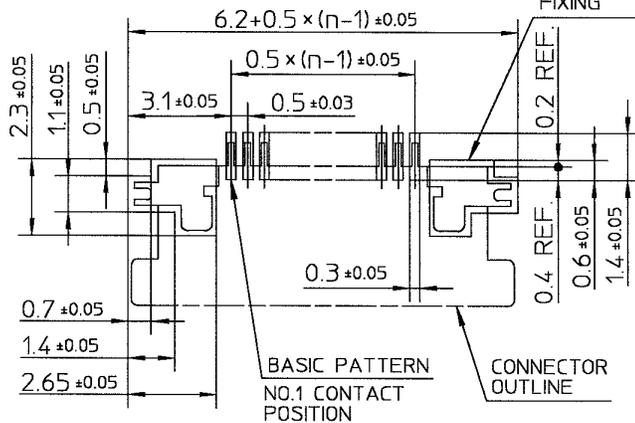

NOTES


1. THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
2. THIS PRODUCT IS LOWER CONTACT TYPE CONNECTOR.
3. FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

SHEET INDEX	ISSUE	D					FCI		TITLE	
	SH NO.	1							CONNECTOR USED FOR FPC WITH 0.5 mm CONTACT SPACING (Cat No. : SFV__R-1STB__LF)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	ENGR	DATE	CUSTOMER COPY			PRODUCT FAMILY		CODE JP
±0.3				2/23/06				58EF		
LINEAR		CHK	APPD	2/23/06	THIRD ANGLE PROJ			SCALE		SIZE
								X		A
ANGLES		= 2°		UNIT	MM			DWG. NO.		REV
				INCH				JSA 96014		D
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN KK.						REV SHEET		10F1
DF-140A REV A										

SC-SFV06 JSA96013

TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±0.2

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0186	H.T	'04/8/9
B	Changed Cat. No.	J04-0454	H.T	'05/2/7
C	Added the heat resistance	J05-0710	H.T	'05/10/21
D	Changed tolerance	J06-0064	H.T	'06/2/23

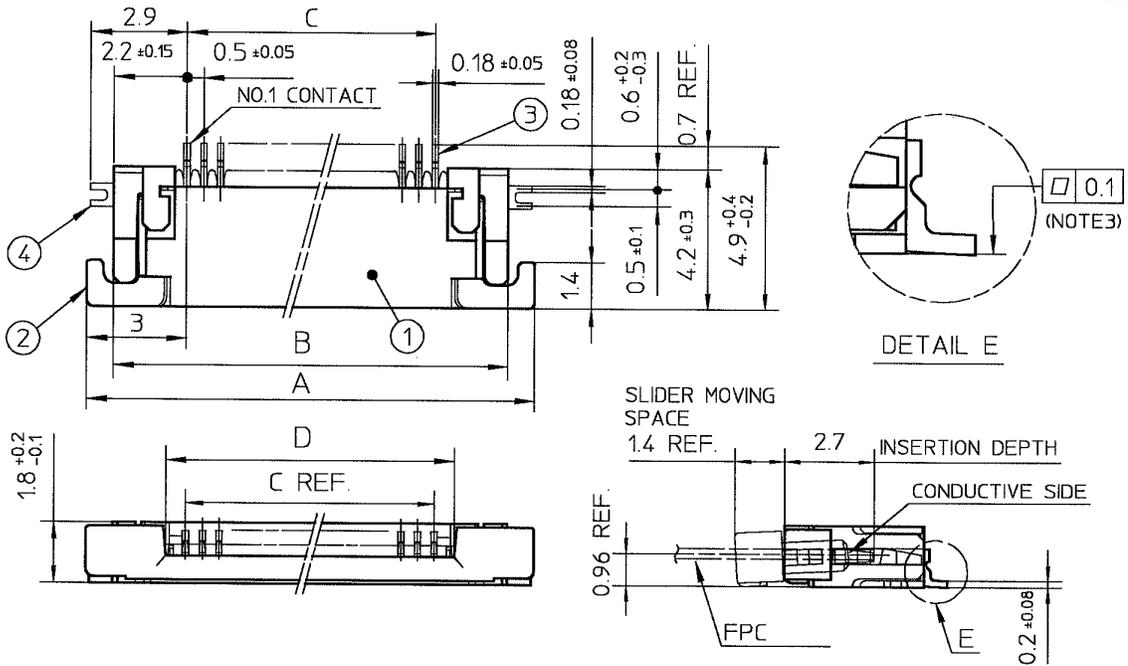


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	POLYAMIDE RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER	PPS RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BROWN
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : GOLD
4	MOUNTING PLATE		2	PLATING : LEAD FREE

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR MOUNTING PLATE  
FIXING

n : NO. OF CONTACTS

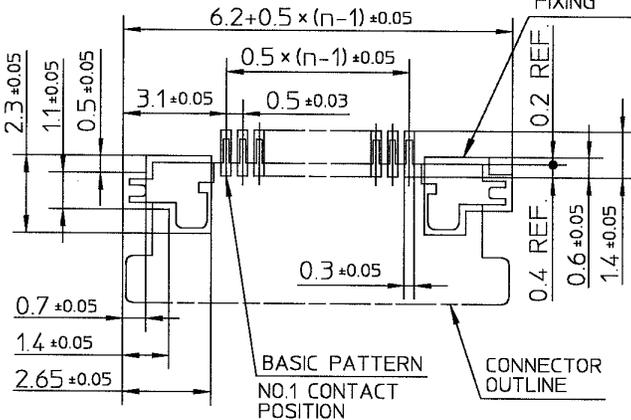

- NOTES
- THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPER WITH AUTOMATIC MOUNTING (SMT).
  - THIS PRODUCT IS UPPER CONTACT TYPE CONNECTOR.
  - FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.


SHEET INDEX	ISSUE	D											TITLE	
	SH NO.	1												
TOLERANCES UNLESS OTHERWISE SPECIFIED	DR	<i>H. Takahashi</i>	DATE	2/23/06	CUSTOMER COPY	TITLE	CONNECTOR USED FOR FPC WITH 0.5 mm CONTACT SPACING (Cat. No. : SFV__R-2STB__LF)							
	ENGR	<i>H. Takahashi</i>	CHK	<i>N. Nozawa</i>								2/23/06		
	APPD	<i>S. Ueda</i>	DATE	2/23/06										
LINEAR	±0.3											UNIT	MM	
ANGLES	±2°											PRODUCT FAMILY	58EF	CODE JP
DO NOT SCALE PRINT THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.						SCALE	SIZE	DWG. NO.	REV	SHEET				
DF-140A REV A						∞	A	JSA 96015	D	10F1				

SC-SFV06 JSA96013



TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±5, ANGLE ±5°

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0186	H.T	'04/8/9
B	Changed Cat. No.	J04-0454	H.T	'05/2/7

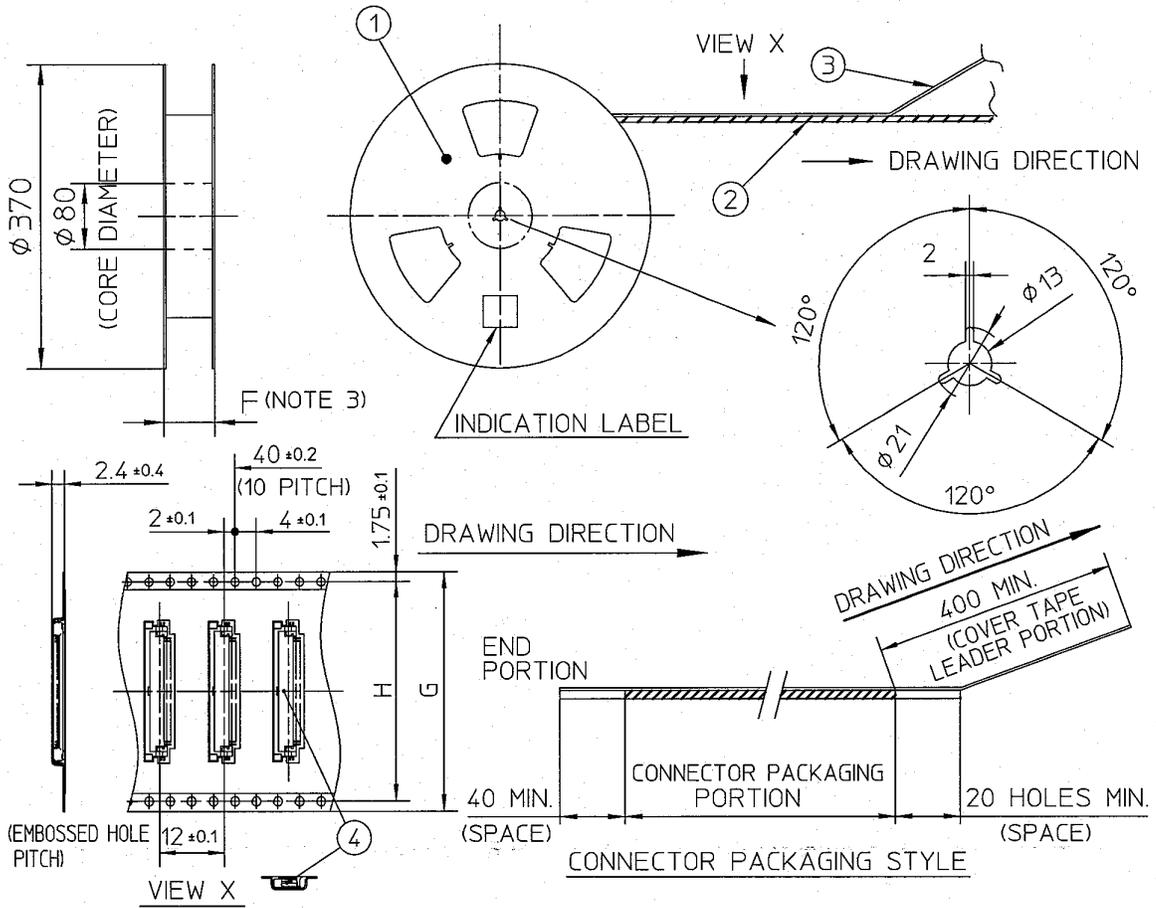

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	—	CARDBOARD	1	COLOR : WHITE
2	PLASTIC (EMBOSS) TAPE	—	A-PET	—	COLOR : TRANSPARENCY
3	COVER	—	POLYESTER	—	COLOR : TRANSPARENCY
4	CONNECTOR	SFV__R-1STB_LF	SEE ATTACHED DWG.	3000	LOWER CONTACT TYPE

NOTES


- THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
- SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
- F DIMENSION IS PORTION OF THE CORE.

SHEET INDEX	ISSUE	B											<b>FCI</b>								
	SH NO.	1																			
TOLERANCES UNLESS OTHERWISE SPECIFIED	DR	<i>H. Takemura</i>		DATE	2/7/05	CUSTOMER COPY	TITLE PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-1STBE1LF)														
	ENGR	<i>H. Takemura</i>		2/7/05	THIRD ANGLE PROJ																
	CHK	<i>M. Horigawa</i>		2/9/05		UNIT						MM									
LINEAR	±0.3	APPR	<i>M. Horigawa</i>		2/9/05	INCH	PRODUCT FAMILY	58GF	CODE JP												
ANGLES	±2°	DO NOT SCALE PRINT THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.										SCALE	X	SIZE	A	DWG. NO.	JSA 96017	REV	B	SHEET	10F1

SC-SFV06 JSA96013

TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±5, ANGLE ±5°

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0186	H.T	'04/8/9
B	Changed Cat. No.	J04-0454	H.T	'05/2/7

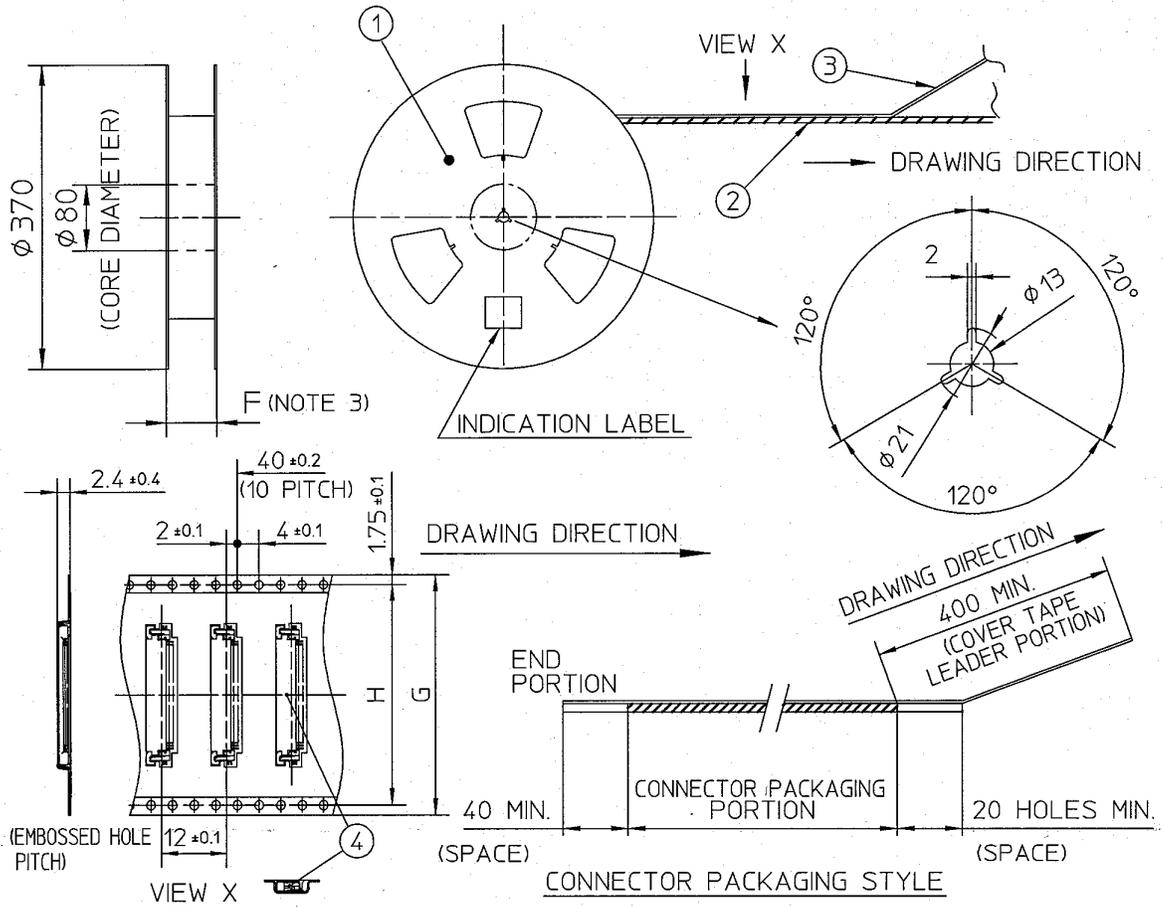

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	—	CARDBOARD	1	COLOR : WHITE
2	PLASTIC (EMBOSS) TAPE	—	A-PET	—	COLOR : TRANSPARENCY
3	COVER	—	POLYESTER	—	COLOR : TRANSPARENCY
4	CONNECTOR	SFV__R-2STB__LF	SEE ATTACHED DWG.	3000	UPPER CONTACT TYPE

NOTES


- THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
- SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
- F DIMENSION IS PORTION OF THE CORE.

SHEET INDEX	ISSUE	B									
	SH NO.	1									
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	<i>H. Takahashi</i>	DATE	2/7/05	CUSTOMER COPY		TITLE			
±0.3		ENGR	<i>H. Takahashi</i>		2/7/05			PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-2STBE1LF)			
LINEAR		CHK	<i>M. Hasegawa</i>		2/9/05	THIRD ANGLE PROJ		PRODUCT FAMILY			
ANGLES	±2	APPD	<i>M. Hasegawa</i>		2/9/05	UNIT		MM	58GF	CODE JP	
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.					SCALE	SIZE	DWG. NO.	REV	SHEET
DF-140A REV A							X	A	JSA 96018	B	1 of 1

SC-SFV06 JSA96013

RECOMMENDED CABLE (FPC)

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0186	H.T	'04/8/9
B	Changed Cat. No.	J04-0454	H.T	'05/2/7

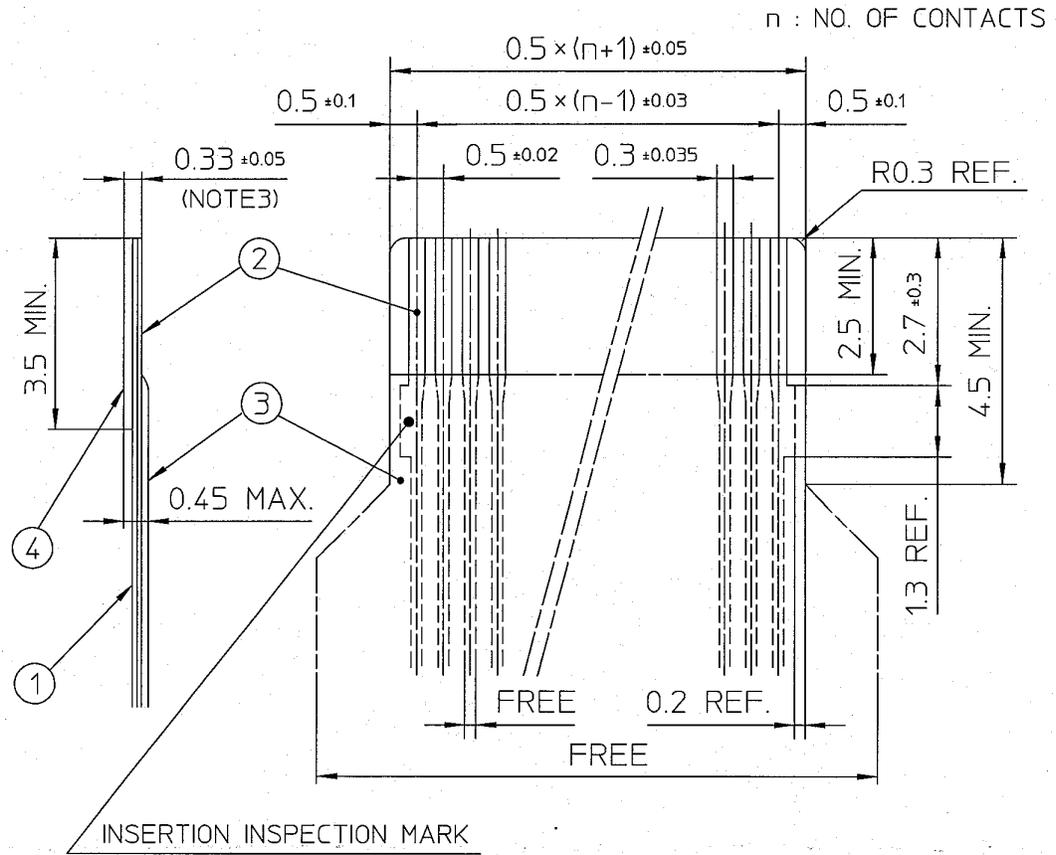

PT. NO.	PARTS NAME	MATERIAL	THICKNESS(μm)
1	BASE FILM	POLYIMIDE OR POLYESTER OR EQUAL	25
2	CONDUCTOR	COPPER FOIL(PLATING : GOLD )	35
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.


SHEET INDEX	ISSUE B	SH NO. 1					<b>FCI</b>		
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	DATE	CUSTOMER COPY	TITLE				
±0.3		ENGR	2/7/05	THIRD ANGLE PROJ	RECOMMENDED CABLE				
LINEAR		CHK	2/9/05	UNIT	(Cat. No. : SFV__R-1/2ST__LF)				
ANGLES		APPD	2/9/05	MM INCH	PRODUCT FAMILY		CODE JP		
±2°					58GF				
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.			SCALE	SIZE	DWG. NO.	REV	SHEET
DF-140A REV A					1/2	A	JSA 96019	B	10F1

SC-SFV06 JSA96013



TOLERANCES  
UNLESS OTHERWISE SPECIFIED: ±0.2

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'05/2/17
B	Added the heat resistance.	J05-0710	H.T	'05/10/21
C	Changed tolerance	J06-0064	H.T	'06/2/23

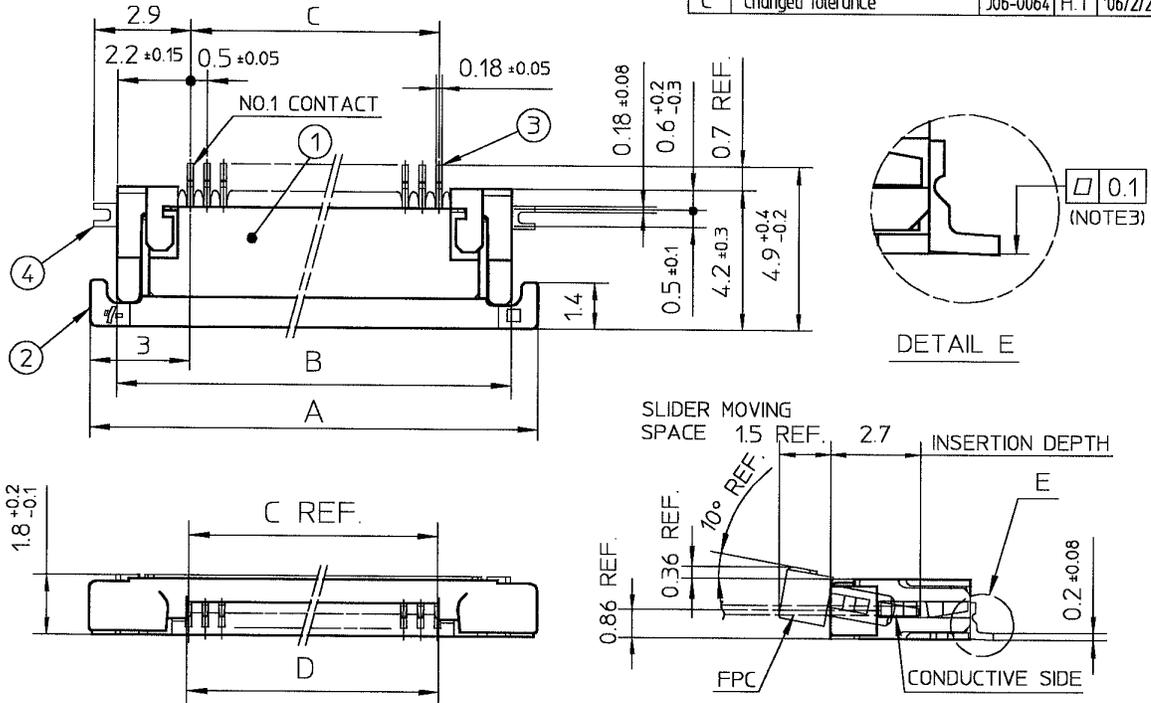


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	POLYAMIDE RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER	PPS RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : GOLD
4	MOUNTING PLATE		2	PLATING : LEAD FREE

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR MOUNTING PLATE  
FIXING

n : NO. OF CONTACTS

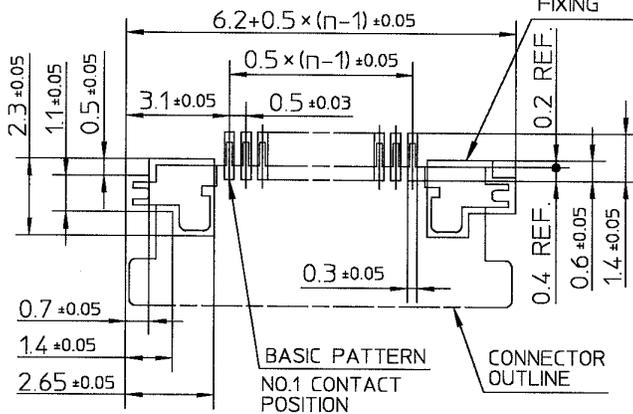

NOTES


- THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPE WITH AUTOMATIC MOUNTING (SMT).
- THIS PRODUCT IS LOWER CONTACT TYPE CONNECTOR WITH CABLE LOCK MECHANISM.
- FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

SHEET INDEX	ISSUE	C					<b>A</b> FCI	TITLE CONNECTOR USED FOR FPC WITH 0.5 mm CONTACT SPACING (Cat. No. : SFV__R-3STB__LF)		
	SH NO.	1								
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	<i>H. Takahashi</i>	DATE	2/23/06	CUSTOMER COPY	PRODUCT FAMILY 58EF			
LINEAR		ENGR	<i>H. Takahashi</i>	DATE	2/23/06	THIRD ANGLE PROJ				
ANGLES		CHK	<i>M. Motoyama</i>	DATE	2/23/06	UNIT				
		APPD	<i>S. Adachi</i>	DATE	2/23/06	MM INCH	CODE JP			
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.				SCALE	SIZE	DWG. NO.	REV	SHEET
DF-140A REV A						∞	A	JSA 96186	C	10F1

SC-SFV07 JSA96185

TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±0.2

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'05/2/7
B	Added the heat resistance.	J04-0710	H.T	'05/10/21
C	Changed tolerance	J06-0064	H.T	'06/2/23

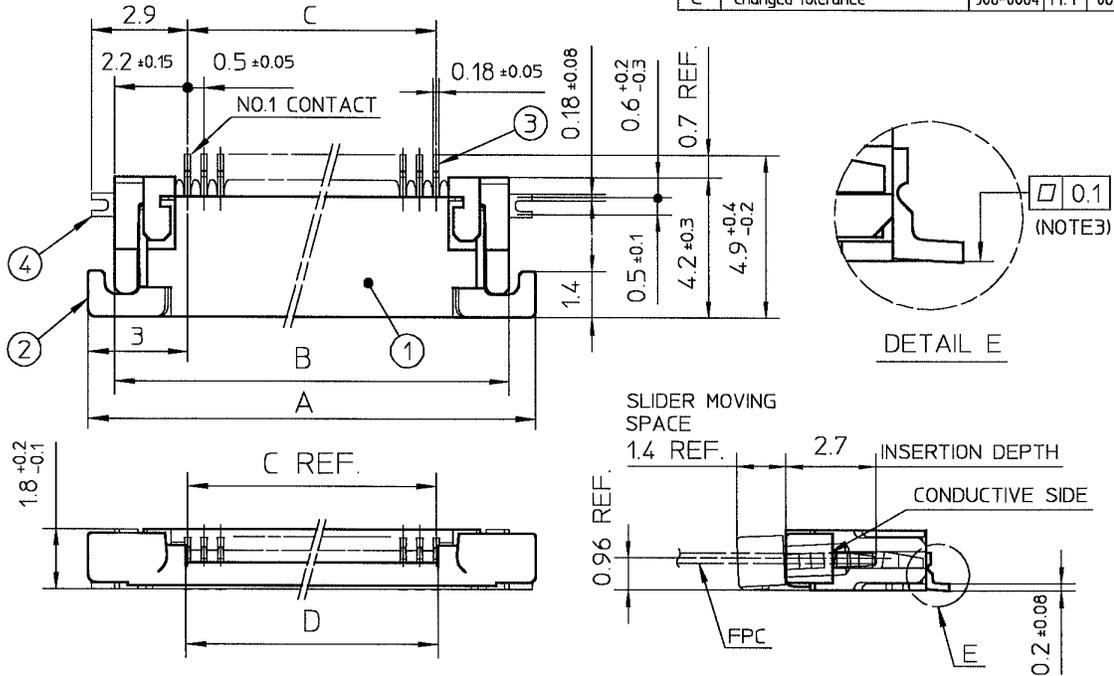


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	POLYAMIDE RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER	PPS RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : GOLD
4	MOUNTING PLATE		2	PLATING : LEAD FREE

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR MOUNTING PLATE  
FIXING

n : NO. OF CONTACTS

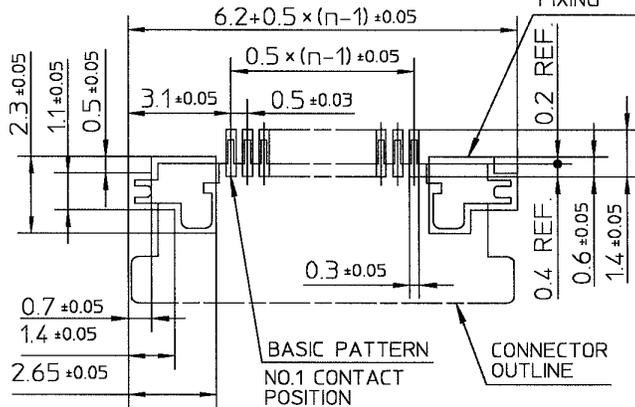

NOTES

- THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
- THIS PRODUCT IS UPPER CONTACT TYPE CONNECTOR WITH CABLE LOCK MECHANISM.
- FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.


SHEET INDEX	ISSUE	C					FCI		TITLE	
	SH NO.	1							CONNECTOR USED FOR FPC WITH 0.5 mm CONTACT SPACING (Cat. No. : SFV__R-4STB__LF)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	ENGR	DATE	CUSTOMER COPY			PRODUCT FAMILY		
±0.3				2/23/06				58EF		
LINEAR		CHK		2/23/06	THIRD ANGLE PROJ			CODE JP		
ANGLES		APPD		2/23/06	UNIT			SCALE		
±2°					MM			SIZE		
					INCH			DWG. NO.		
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.						REV		
DF-140A REV A						X		A		
								JSA 96187		
								C		
								10F1		

SC-SFV07 JSA96185

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'05/2/7

CAT. NO. & DIMENSIONS

NO. OF CONTACTS (n)	CAT. NO.	DIMENSIONS (NOTE3)		
		F ± 5	G ± 0.3	H ± 0.1
4	SFV 4R-3/4STBE1LF	20.4	16	—
5	SFV 5R-3/4STBE1LF	20.4	16	—
6	SFV 6R-3/4STBE1LF	20.4	16	—
7	SFV 7R-3/4STBE1LF	28.4	24	—
8	SFV 8R-3/4STBE1LF	28.4	24	—
9	SFV 9R-3/4STBE1LF	28.4	24	—
10	SFV10R-3/4STBE1LF	28.4	24	—
11	SFV11R-3/4STBE1LF	28.4	24	—
12	SFV12R-3/4STBE1LF	28.4	24	—
13	SFV13R-3/4STBE1LF	28.4	24	—
14	SFV14R-3/4STBE1LF	28.4	24	—
15	SFV15R-3/4STBE1LF	28.4	24	—
16	SFV16R-3/4STBE1LF	28.4	24	—
17	SFV17R-3/4STBE1LF	28.4	24	—
18	SFV18R-3/4STBE1LF	28.4	24	—
19	SFV19R-3/4STBE1LF	28.4	24	—
20	SFV20R-3/4STBE1LF	28.4	24	—
21	SFV21R-3/4STBE1LF	28.4	24	—
22	SFV22R-3/4STBE1LF	28.4	24	—
23	SFV23R-3/4STBE1LF	36.4	32	28.4
24	SFV24R-3/4STBE1LF	36.4	32	28.4
25	SFV25R-3/4STBE1LF	36.4	32	28.4
26	SFV26R-3/4STBE1LF	36.4	32	28.4
27	SFV27R-3/4STBE1LF	36.4	32	28.4
28	SFV28R-3/4STBE1LF	36.4	32	28.4
29	SFV29R-3/4STBE1LF	36.4	32	28.4
30	SFV30R-3/4STBE1LF	36.4	32	28.4
31	SFV31R-3/4STBE1LF	48.4	44	40.4
32	SFV32R-3/4STBE1LF	48.4	44	40.4
33	SFV33R-3/4STBE1LF	48.4	44	40.4
34	SFV34R-3/4STBE1LF	48.4	44	40.4
35	SFV35R-3/4STBE1LF	48.4	44	40.4

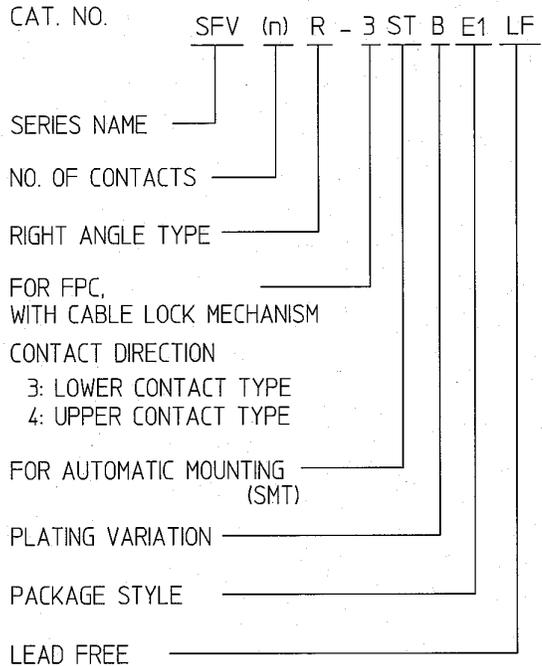

NOTES


1. THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
2. THIS CATALOG NO. INDICATES PLASTIC TAPE PACKAGED
3. SEE PART DRAWINGS FOR DIMENSIONS F~H.
4. THIS PRODUCT IS THE CONNECTOR WITH CABLE LOCK MECHANISM.

SHEET INDEX	ISSUE	A											<b>FCI</b>				
	SH NO.	1															
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	DATE		CUSTOMER COPY		TITLE					CODE JP					
LINEAR	±0.3	ENGR	2/7/05		THIRD ANGLE PROJ		CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-3/4STBE1LF)										
		CHK	2/9/05		UNIT		PRODUCT FAMILY		58GF								
ANGLES	±2	APPD	2/9/05		MM INCH		SCALE		SIZE		DWG. NO.		REV	SHEET			
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN KK.										DF-140A REV A	SC	A	JSA 96188	A	10F1

SC-SFV07 JSA96185 96189 96190

TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±5, ANGLE ±5°

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'05/2/7

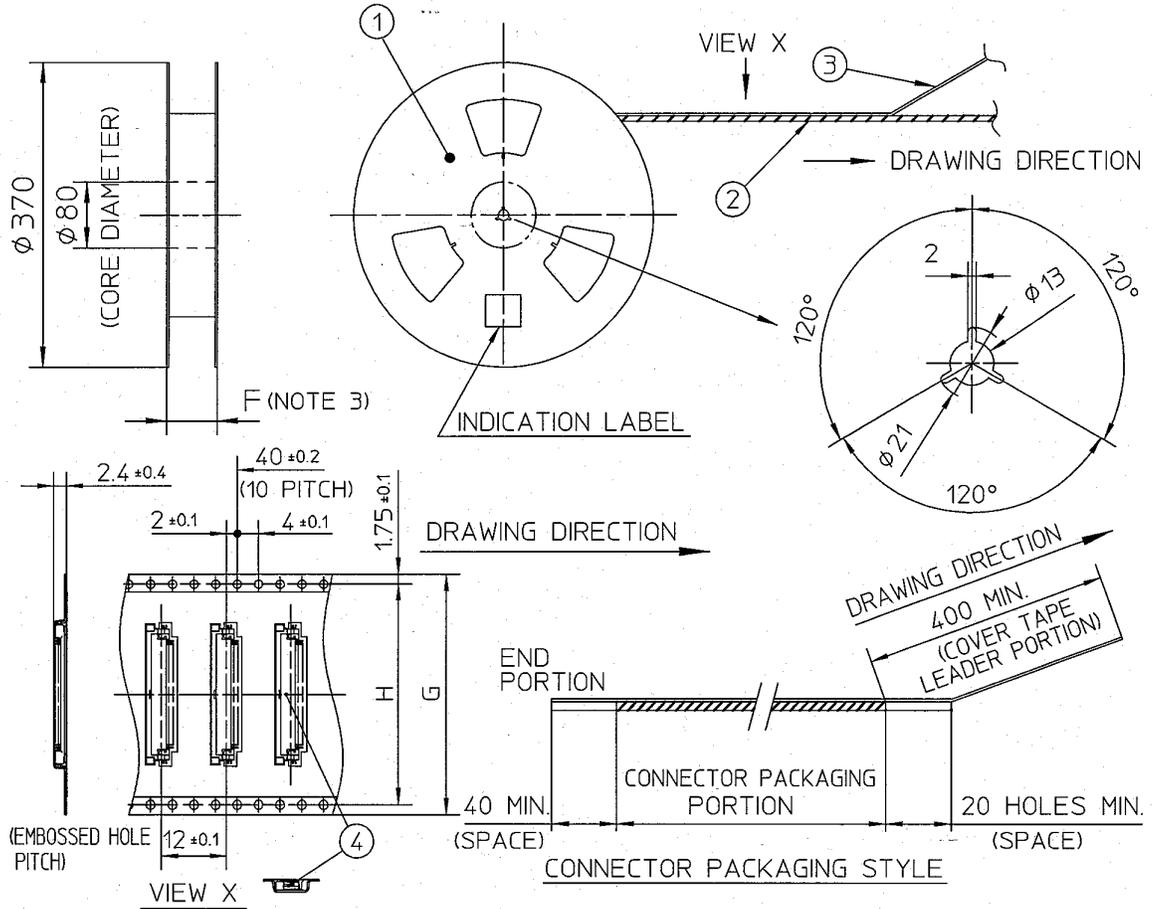

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	—	CARDBOARD	1	COLOR : WHITE
2	PLASTIC (EMBOSS) TAPE	—	A-PET	—	COLOR : TRANSPARENCY
3	COVER	—	POLYESTER	—	COLOR : TRANSPARENCY
4	CONNECTOR	SFV__R-3STB__LF	SEE ATTACHED DWG.	3000	LOWER CONTACT TYPE WITH CABLE LOCK MECHANISM

NOTES


1. THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
2. SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
3. F DIMENSION IS PORTION OF THE CORE.

SHEET INDEX	ISSUE	A											<b>FCI</b>								
	SH NO.	1																			
TOLERANCES UNLESS OTHERWISE SPECIFIED	DR	<i>H. Takahara</i>	DATE	2/7/05	CUSTOMER COPY	TITLE PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-3STBE1LF)															
	ENGR	<i>H. Takahara</i>	DATE	2/7/05																	
	CHK	<i>M. Furugawa</i>	DATE	2/9/05	THIRD ANGLE PROJ.																
	APPD	<i>M. Furugawa</i>	DATE	2/10/05	UNIT							MM / INCH									
LINEAR	±0.3											PRODUCT FAMILY	58GF	CODE JP							
ANGLES	±2											SCALE	χ	SIZE	A	DWG. NO.	JSA 96189	REV	A	SHEET	10F1
DO NOT SCALE PRINT THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN KK.												DF-140A REV A									

SC-SFV07 JSA96188

TOLERANCES  
UNLESS OTHERWISE SPECIFIED :  $\pm 5$ , ANGLE  $\pm 5^\circ$

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'04/2/7

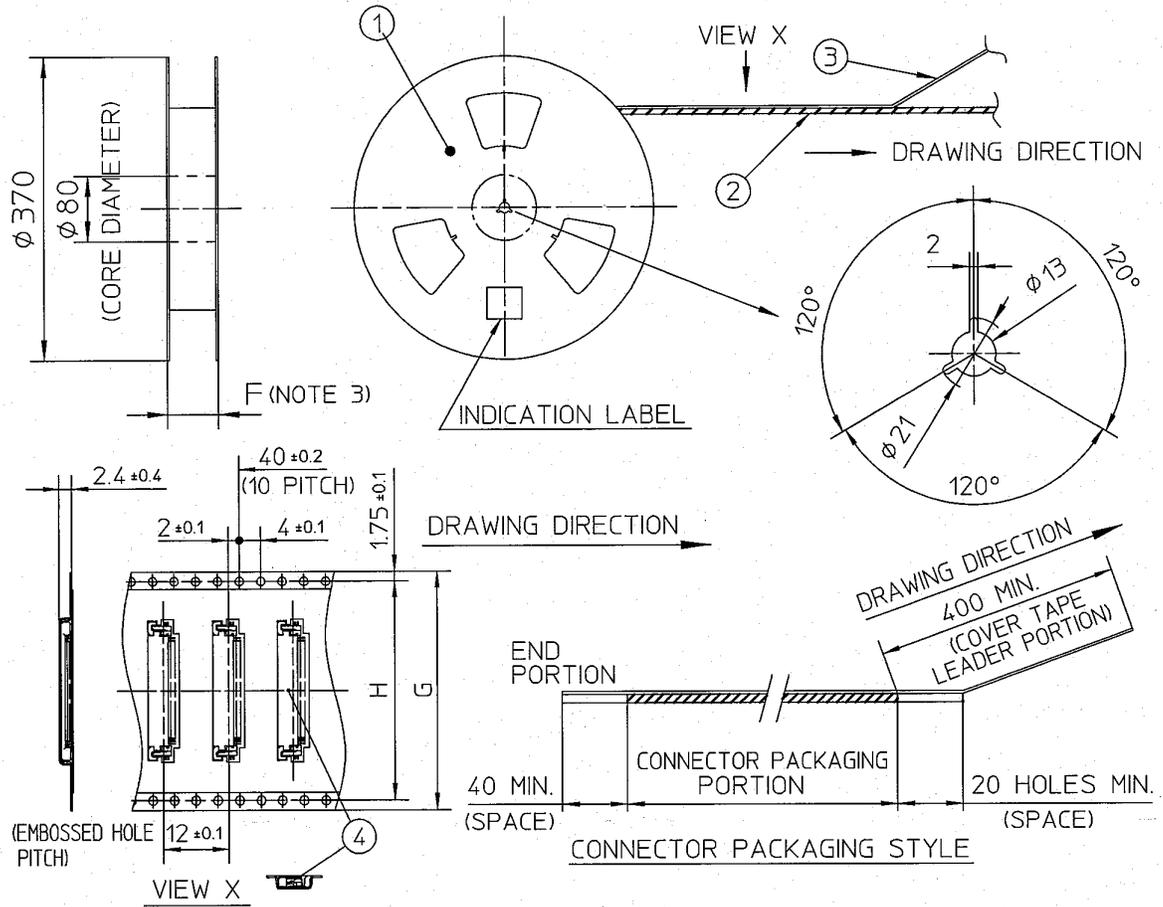

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	—	CARDBOARD	1	COLOR : WHITE
2	PLASTIC (EMBOSS) TAPE	—	A-PET	—	COLOR : TRANSPARENCY
3	COVER	—	POLYESTER	—	COLOR : TRANSPARENCY
4	CONNECTOR	SFV__R-4STB__LF	SEE ATTACHED DWG.	3000	UPPER CONTACT TYPE WITH CABLE LOCK MECHANISM

NOTES


1. THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND COPES WITH AUTOMATIC MOUNTING (SMT).
2. SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
3. F DIMENSION IS PORTION OF THE CORE.

SHEET INDEX	ISSUE	A					<b>FCI</b>			
	SH NO.	1								
TOLERANCES UNLESS OTHERWISE SPECIFIED	DR	<i>H. Takahashi</i>	DATE	2/7/05	CUSTOMER COPY	TITLE PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-4STBE1LF)				
	ENGR	<i>H. Takahashi</i>	2/7/05	THIRD ANGLE PROJ						
	CHK	<i>M. Hasegawa</i>	2/9/05							
LINEAR	$\pm 0.3$	APPD	<i>M. Hasegawa</i>	2/9/05	UNIT	MM				
ANGLES	$\pm 2$					PRODUCT FAMILY	58GF			
DO NOT SCALE PRINT THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN KK.						SCALE	SIZE	DWG. NO.	REV	SHEET
DF-140A REV A						$\times$	A	JSA 96190	A	1 of 1

SC-SFV07 JSA96188

RECOMMENDED CABLE (FPC)

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J04-0454	H.T	'05/2/7

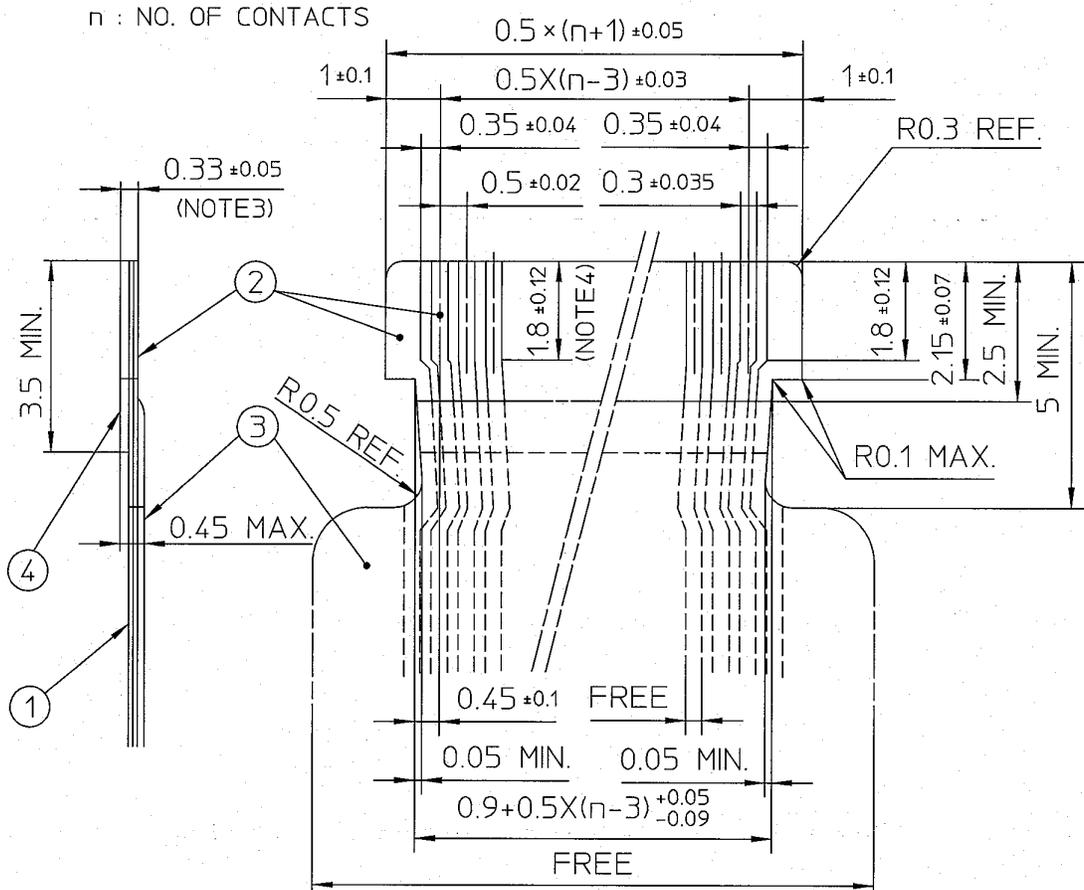

PT. NO.	PARTS NAME	MATERIAL	THICKNESS(μm)
1	BASE FILM	POLYIMIDE OR POLYESTER OR EQUAL	25
2	CONDUCTOR	COPPER FOIL(PLATING : GOLD)	35
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.
4. THIS DIMENSION INDICATES THE RANGE FOR 0.3 ± 0.035 CONDUCTOR WIDTH.

SHEET INDEX	ISSUE A	SH NO. 1					<b>FCI</b>		
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	<i>H. Takakura</i>	DATE	2/7/05	CUSTOMER COPY	TITLE		
LINEAR		ENGR	<i>H. Takakura</i>	2/7/05	THIRD ANGLE PROJ.	RECOMMENDED CABLE (Cat. No. : SFV__R-3/4ST__LF)			
ANGLES		CHK	<i>M. Hasegawa</i>	2/7/05	UNIT	MM	PRODUCT FAMILY		
DO NOT SCALE PRINT		APPR	<i>M. Hasegawa</i>	2/7/05	INCH	58GF	CODE JP		
DF-140A REV A	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.				SCALE	SIZE	DWG. NO.	REV	SHEET
					X	A	JSA 96191	A	10F1