


Typical Performance - Noise Parameters - 3V, 10mA

Frequency (GHz)	NFMIN (dB) ^[5]	Γ_{OPT} Mag<Ang	r_n (Ω)	GMAX (dB)
0.9	0.94	0.10<55	0.11	23.88
1.9	1.1	0.71<125	0.10	19.33
2.4	1.18	0.25<157	0.09	17.66
3	1.27	0.23<179	0.09	15.01
4	1.5	0.29<-150	0.12	11.94
5	1.73	0.42<-122	0.18	9.84
6	2.02	0.55<-110	0.24	8.62

[5] $Z_S = \Gamma_{OPT}$, $Z_L = Z_L^*$, NF_{MIN} is a noise parameter for which the input matching circuit losses have been de-embedded. The noise parameters were measured using a Maury Microwave Automated Tuner System. The device was mounted on a 0.010" PCB with plated-thru holes close to pins 2 and 4.

Pin	Function	Description
1	BASE	RF input/base pin.
2, 4	EMITTER	Connection to ground. Use multiple via holes to reduce emitter inductance.
3	COLLECTOR	RF output/collector bias.

Recommended PCB Layout

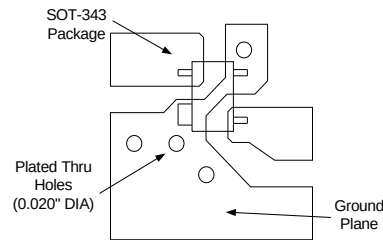


Use multiple plated-thru via holes located close to the package pins to ensure a good RF ground connection to a continuous groundplane on the backside of the board.

Package Drawing

Dimensions in inches (millimeters)

Refer to drawing posted at www.rfmd.com for tolerances.

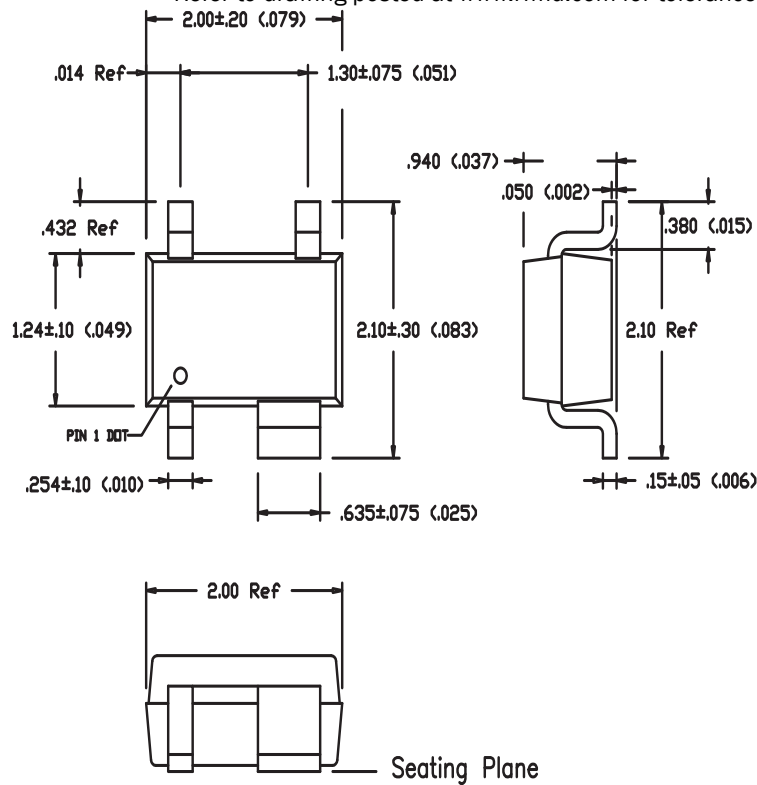

Scale (mm) 1:2

Notes:


1. Lead Base Metal - Copper $\square$ lin 194

2. Lead Finish

Std PN - Sn/Pb Sn $\Rightarrow$ 80%


Z Option - 100% Matte Sn - .010 (.0004) min thk

Part Identification




LotXref trace code begins with "Z".

SGA8343Z-EVB1 800MHz to 1000MHz Evaluation Board

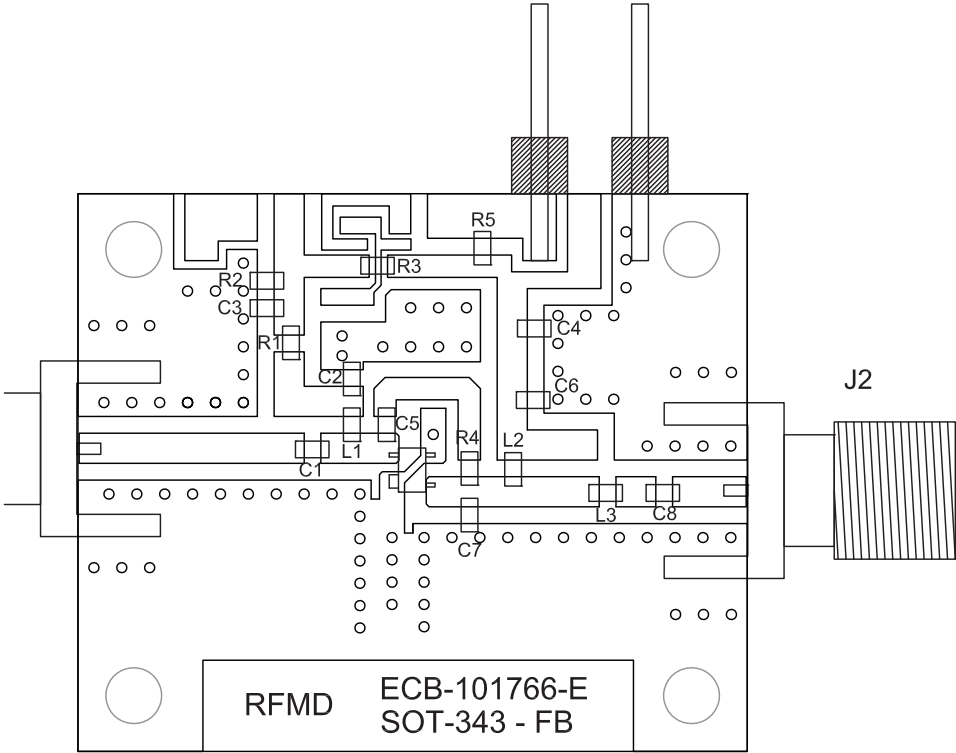


Ref. Des	Part Number	Value
C1, 2, 6, 8	ROHM MCH185A390J	39pF
C7	ROHM MCH185A0R5C	0.5pF
C3, 4, 5	Samsung CL 10B104K0NC	0.1μF
L1	TOKO LL 1608-FS18NJ	18nH
L2	TOKO LL 1608-FSR12J	120nH
L3	TOKO LL 1608-FS6N8J	6.8nH
R1	ROHM MCR03J5R1	5.1Ω
R2	ROHM MCR03J911	910Ω
R3, 4	ROHM MCR03J242	2.4KΩ
R5	ROHM MCR0.J161	160Ω
Z1	non-critical	50Ω
Z2	4.0 degrees at 900MHz	50Ω
Z3	11.5 degrees at 900MHz	63Ω
Z4	5.0 degrees at 900MHz	50Ω
Z5	3.6 degrees at 900MHz	50Ω
Z6	3.7 degrees at 900MHz	50Ω
Z7	7.1 degrees at 900MHz	50Ω
Z8	non-critical	50Ω

SGA8343Z-EVB1 800MHz to 1000MHz Application Schematic

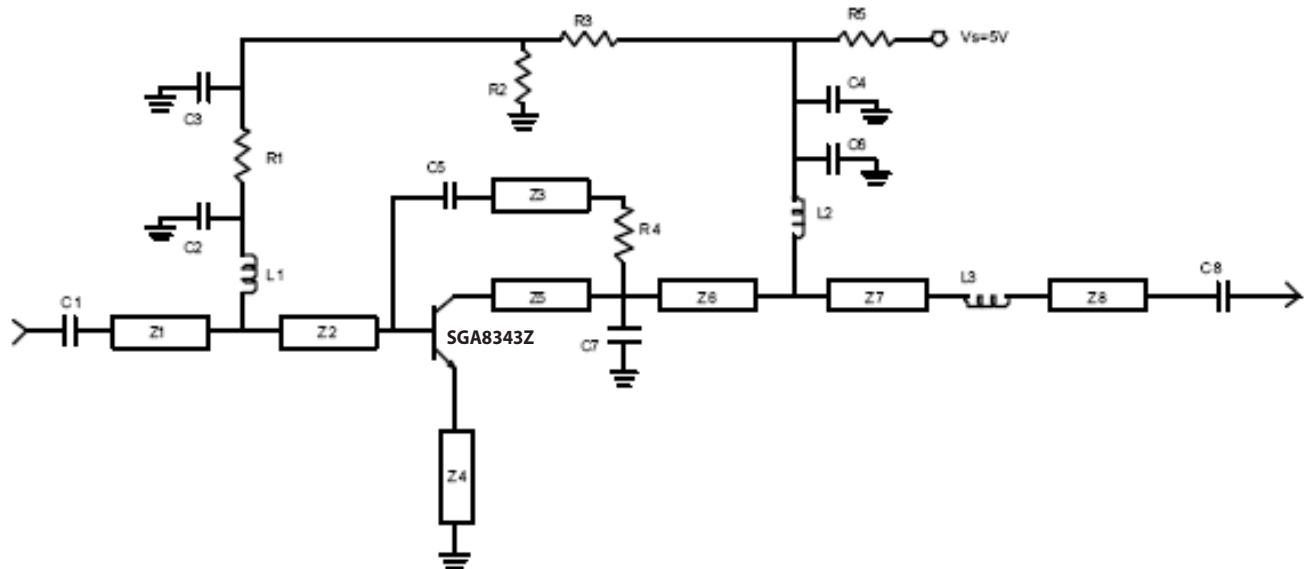


SGA8343Z-EVB2 1800MHz to 2000MHz Evaluation Board

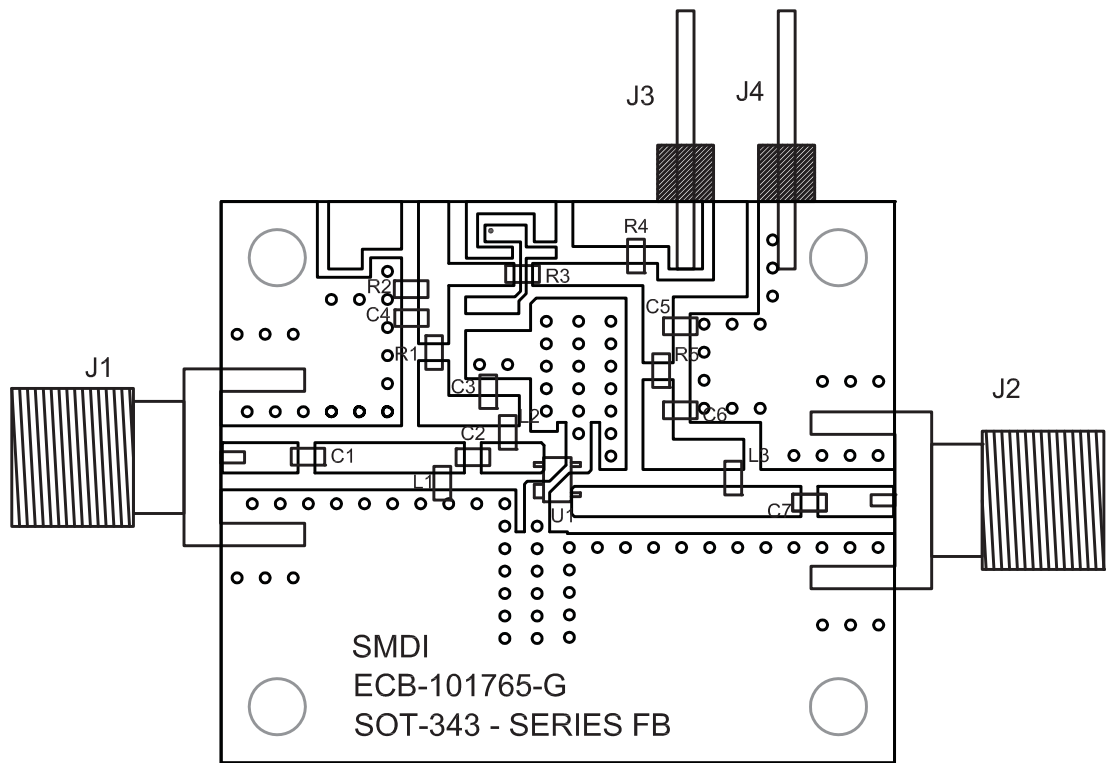


Ref. Des	Part Number	Value
C1, 7	ROHM MCH185A390J	39pF
C2	ROHM MCH185A2R2C	2.2pF
C3, 6	ROHM MCH185A100D	10pF
C4, 5	Samsung CL10B104K0NC	0.1µF
L1	TOKO LL 1608-FS3N9S	3.9nH
L2	TOKO LL 1608-FS18NJ	18nH
L3	TOKO LL 1608-FS3N3S	3.3nH
R1, 5	ROHM MCR03J5R1	5.1Ω
R2	ROHM MCR03J911	910Ω
R3	ROHM MCR03J242	2.4KΩ
R4	ROHM MCR0.J161	160Ω
Z1	non-critical	50Ω
Z2	3.9 degrees at 1900MHz	50Ω
Z3	4.7 degrees at 1900MHz	50Ω
Z4	6.4 degrees at 900MHz	50Ω
Z5	9.8 degrees at 1900MHz	50Ω
Z6	9.8 degrees at 1900MHz	50Ω
Z7	28.7 degrees at 1900MHz	50Ω
Z8	non-critical	50Ω

SGA8343Z-EVB2 1800 MHz to 2000 MHz Application Schematic

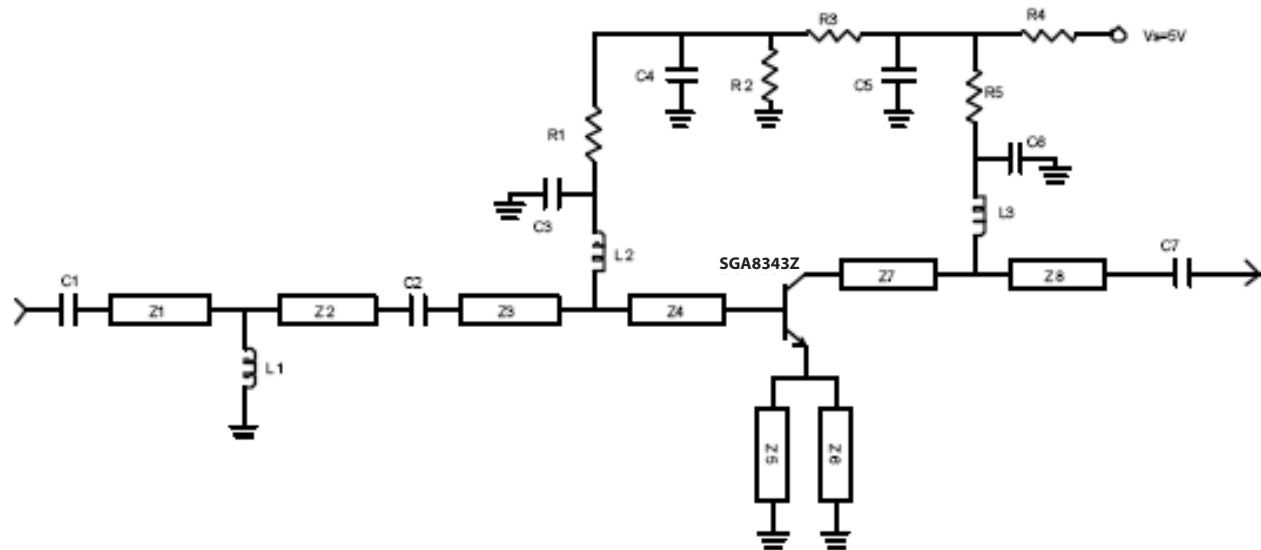


SGA8343Z-EVB3 2400MHz to 2500MHz Evaluation Board

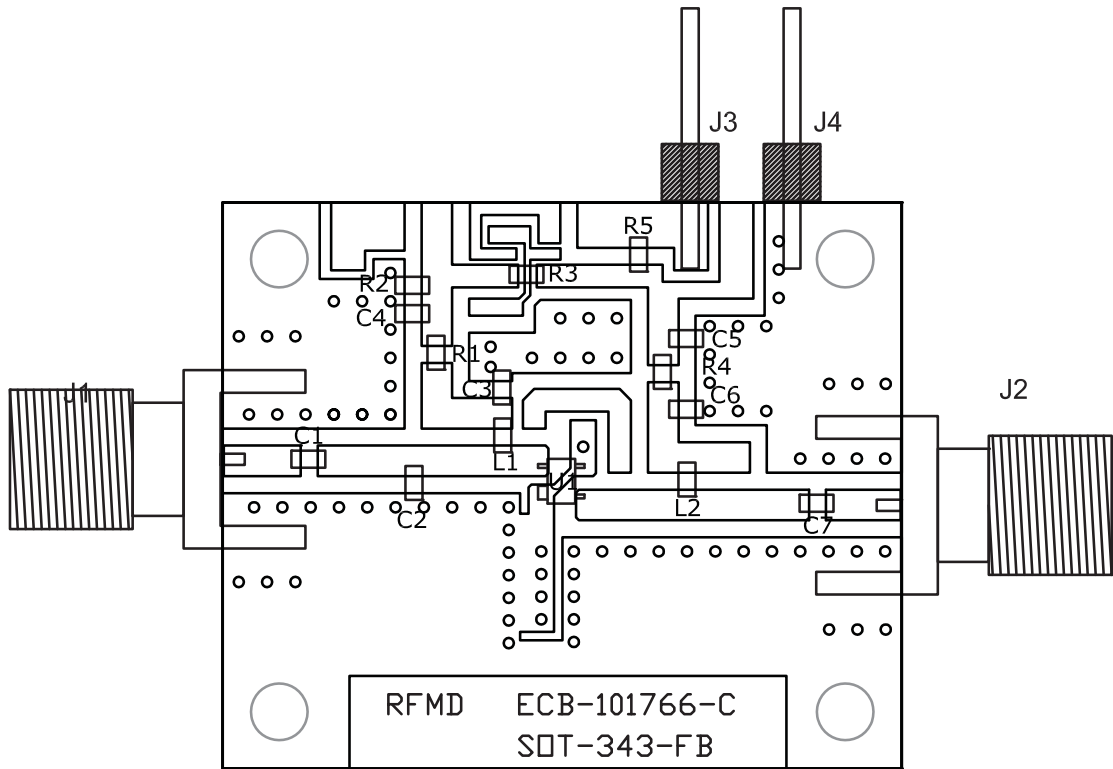


Ref. Des	Part Number	Value
C1, 3, 6, 7	ROHM MCH185A5R6D	5.6pF
C2	ROHM MCH185A010C	1.0pF
C4, 5	Samsung CL 10B104K0NC	0.1μF
L1	TOKO LL 1608-FS10NJ	10nH
L2	TOKO LL 1608-FS2N7S	2.7nH
R1, 4	ROHM MCR03J100	10Ω
R2	ROHM MCR03J102	1.1KΩ
R3	ROHM MCR03J222	2KΩ
R5	ROHM MCR50J620	62Ω
Z1	non-critical	50Ω
Z2	8.2 degrees at 2440MHz	50Ω
Z3	21.7 degrees at 2440MHz	50Ω
Z4	6.2 degrees at 2440MHz	50Ω
Z5	6.2 degrees at 2440MHz	50Ω
Z6	23.8 degrees at 2440MHz	50Ω
Z7	non-critical	50Ω

SGA8343Z-EVB3 2400 MHz to 2500 MHz Application Schematic

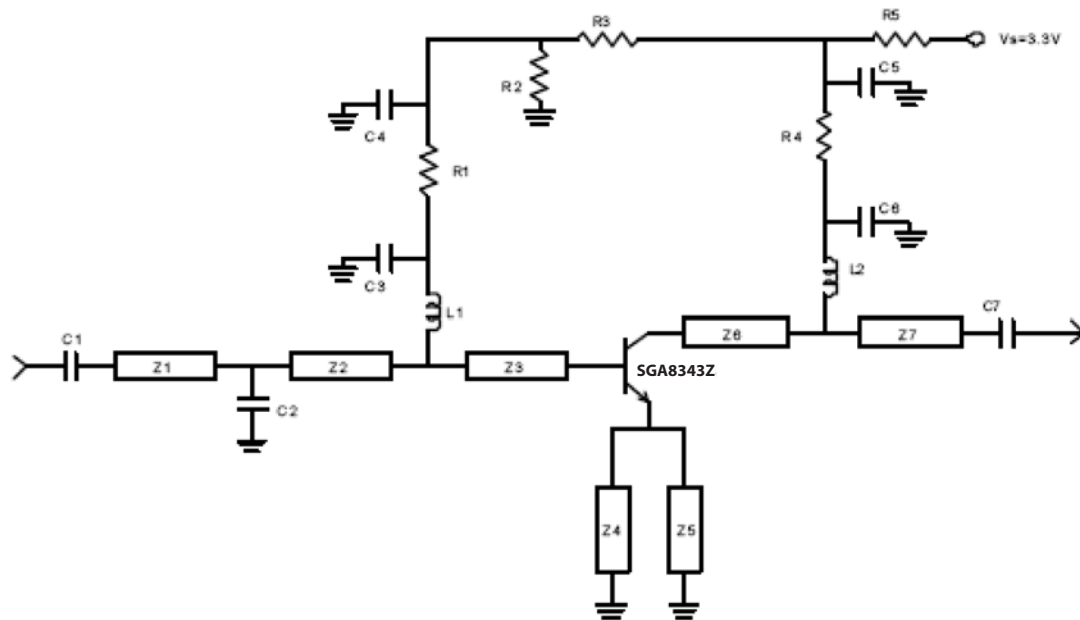


SGA8343Z-EVB4 1575 MHz Evaluation Board

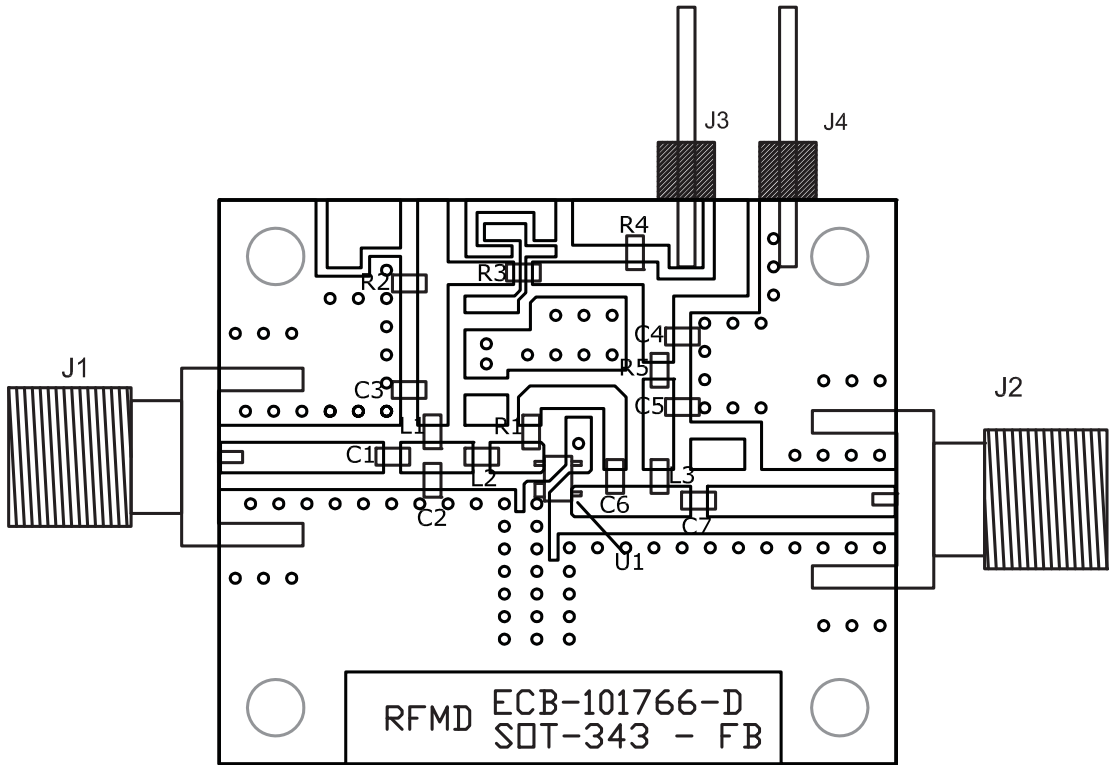

Ref. Des	Part Number	Value
C1, 5, 7	ROHM MCH185A150J	15pF
C2	ROHM MCH185A1R2C	1.2pF
C3, 4, 6	Samsung CL 10B104K0NC	0.1μF
L1	TOKO LL 1608-FS39NJ	39nH
L2	TOKO LL 1608-FS1N8S	1.8nH
L3	TOKO LL 1608-FS3N9S	3.9nH
R1, 3	ROHM MCR03J222	2.2KΩ
R2	ROHM MCR03J102	1.0KΩ
R4	ROHM MCR03J620	62Ω
R5	ROHM MCR03J100	10Ω
Z1	non-critical	50Ω
Z2	6.5 degrees at 1575MHz	50Ω
Z3	7.8 degrees at 1575MHz	50Ω
Z4	6.4 degrees at 1575MHz	50Ω
Z5	6.4 degrees at 1575MHz	50Ω
Z6	non-critical	50Ω
Z7	11.1 degrees at 1575MHz	50Ω
Z8	6.3 degrees at 1575MHz	50Ω
Z9	26.0 degrees at 1575MHz	60Ω

SGA8343Z-EVB4 1575MHz Application Schematic

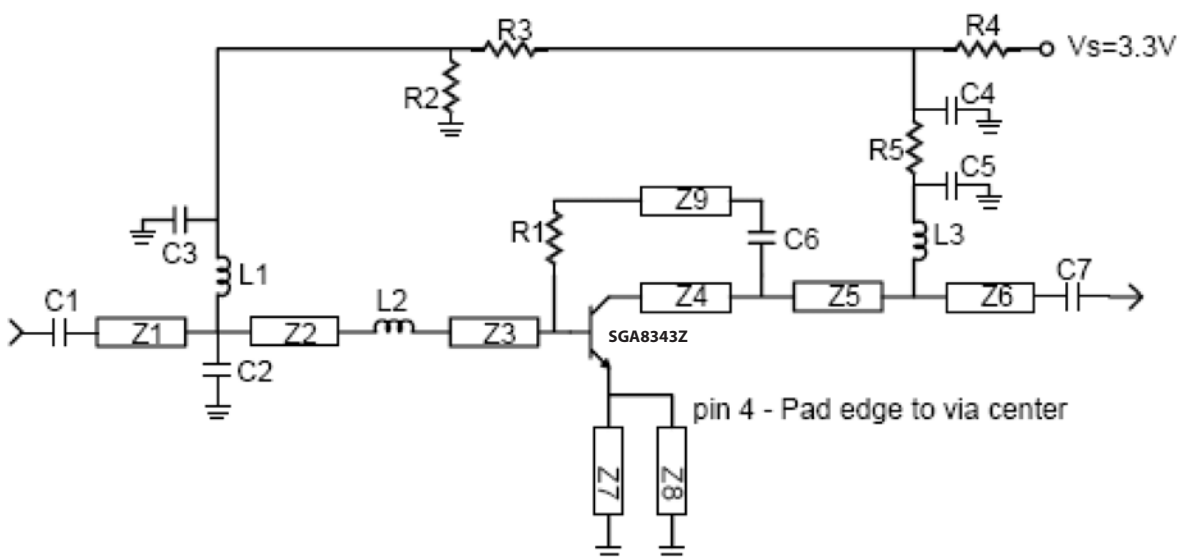

Ordering Information

Ordering Code	Description
SGA8343ZSQ	Standard 25 piece bag
SGA8343ZSR	Standard 100 piece reel
SGA8343Z	Standard 1000 piece reel
SGA8343ZPCK1	800MHz to 1000MHz PCBA with 5-piece sample bag
SGA8343ZPCK2	1800MHz to 2000MHz PCBA with 5-piece sample bag
SGA8343ZPCK3	2400MHz to 2500MHz PCBA with 5-piece sample bag
SGA8343ZPCK4	1575MHz PCBA with 5-piece sample bag