


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.




NO WARRANTY, EXPRESSED OR IMPLIED IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND / OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

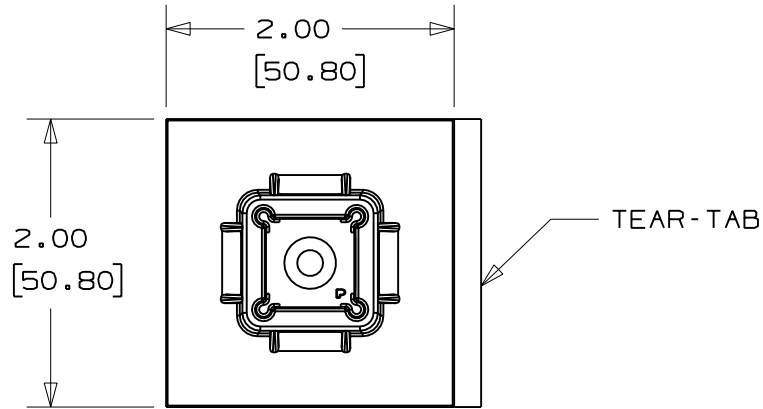

| PANDUIT<br>PART NO.      | REC'M<br>FASTENER   | USE WITH THESE<br>CABLE TIE<br>CROSS SECTIONS                                              | WEIGHT<br>LBS / 100<br>(g) / PCS |
|--------------------------|---------------------|--------------------------------------------------------------------------------------------|----------------------------------|
| SGABM50-A-___<br>ABM50   | RUBBER<br>ADHESIVE  | M, I, S, LH, H<br>SG100M, SG150I,<br>SG200S, SG250S,<br>SG300S, SG370S,<br>SG350LH, SG450H | 1.2<br>(544.3)                   |
| SGABM50-AT-___<br>ABM50B | ACRYLIC<br>ADHESIVE |                                                                                            |                                  |

#### NOTES

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- HOLE FOR STANDARD #8 FLAT HEAD SCREW.
- [-A] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 120°F (49°C).  
[-AT] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 180°F (82°C).

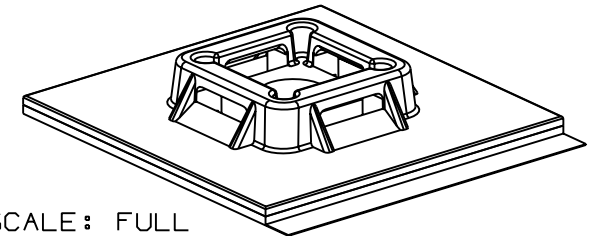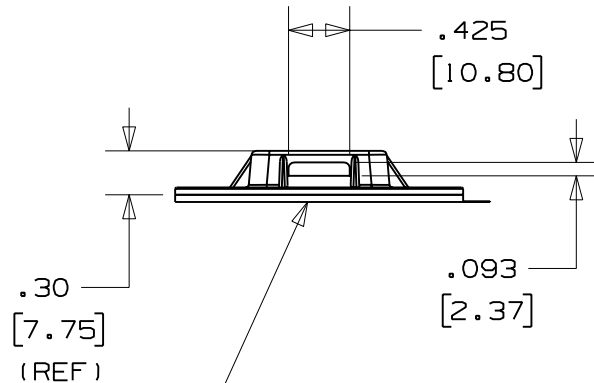

SCALE: FULL

ADHESIVE BACKING:  
MOUNT IS DESIGNED TO SUPPORT 2.0 lbs (907g) MAX. WEIGHT ON A CLEAN DRY SMOOTH SURFACE.  
\*[-A] RUBBER BASED ADHESIVE PRESSURE SENSITIVE FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE LINER.  
\*[-AT] ACRYLIC BASED ADHESIVE PRESSURE SENSITIVE FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE LINER.

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G03150FH\_PB\_SGABM50\_01

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

ADHESIVE BACKED MOUNT -SUPER GRIP  
COMPATIBLE (SGABM50-\_-\_-\_-)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
(.XX) ±0.02 (0.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE  
PROJECTION.

DRAWN BY  
JAD

MAT'L:

SCALE  
3/4

DATE  
6/12/06

NYLON 6/6

DRAWING NO.  
GB3150FH

DWG  
A  
SIZE

| I   | 9/20/06 | JAD |     | UPDATE, ADD TEAR TAB | GB3150FH | I   |      |     |  |
|-----|---------|-----|-----|----------------------|----------|-----|------|-----|--|
| REV | DATE    | BY  | CHK | DESCRIPTION          | ECN      | - R | CUST | SUP |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[SGABM50-A-L](#) [SGABM50-AT-L0](#)