

January 8, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

HIGH VOLTAGE, HIGH DENSITY, FAST RECOVERY MODULAR RECTIFIER ASSEMBLY

- Low reverse recovery time
- Modular construction
- Low reverse leakage current
- High thermal shock resistance
- Provides design versatility


QUICK REFERENCE DATA

- $V_R = 2.5\text{kV} - 15\text{kV}$
- $I_F = 350\text{mA}$
- $I_R = 0.25\mu\text{A}$
- $t_{rr} = 350\text{nS}$

ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current $I_{F(AV)}$				1 Cycle Surge Current I_{FSM} $t_p = 8.3\text{ms}$ @ T_{JMAX}	Repetitive Surge Current I_{FRM} @ 25°C	I^2t $t_p = 8.3\text{ms}$
		air 25°C	air 100°C	stud to heat-sink @ 25°C	in still oil @ 55°C			
		Volts	Amps	Amps	Amps	Amps	Amps	A^2S
SHVM2.5F	2500							
SHVM5F	5000							
SHVM7.5F	7500							
SHVM10F	10000	0.35	0.15	0.35	0.35	15.0	8.0	0.9
SHVM12.5F	12500							
SHVM15F	15000							

MECHANICAL

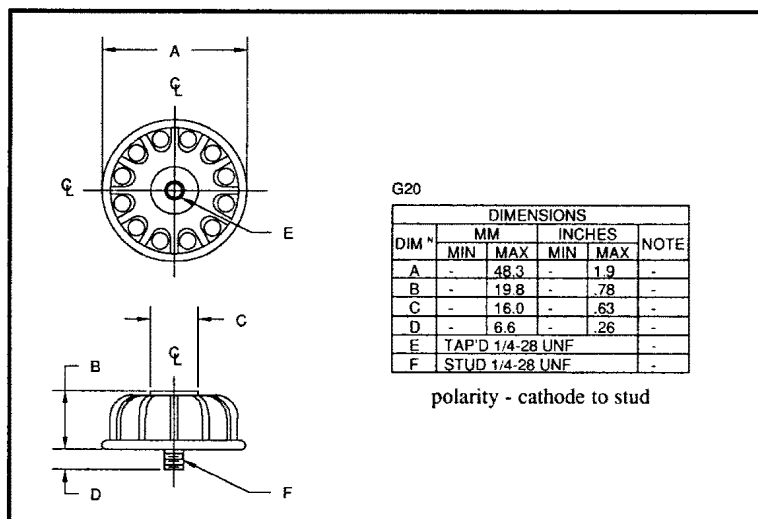

MAXIMUM THERMAL IMPEDANCES

Junction - Ambient $R_{\theta JA} < 12^\circ\text{C/W}$
 Junction - Stud $R_{\theta JS} < 6^\circ\text{C/W}$
 Junction - Oil $R_{\theta JO} < 4.5^\circ\text{C/W}$

January 8, 1998

ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current I_R @ V_{RWM}		Maximum Reverse Recovery Time ¹ t_{rr} @ 25°C	Maximum Forward Voltage V_F @ 0.8A @ 25°C
	@ 25°C	@ 100 °C		
	μA	μA	nS	Volts
SHVM2.5F	1.0	50	350	7
SHVM5F				14
SHVM7.5F				21
SHVM10F				28
SHVM12.5F				35
SHVM15F				42

1. Measured on discrete devices prior to assembly

Operating temperature range -55 °C to +150 °C
Storage temperature range -55 °C to +150 °C

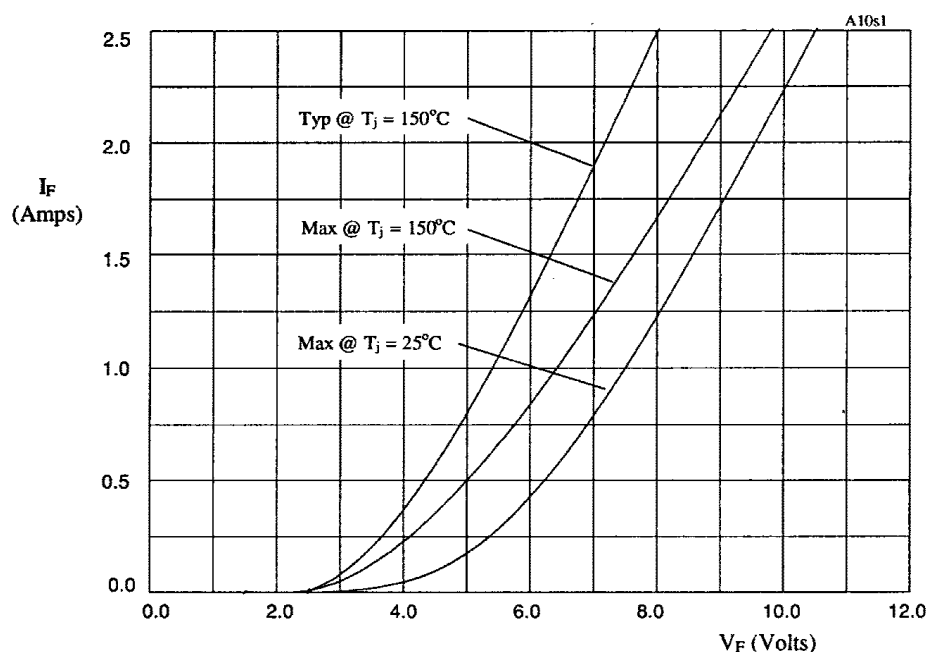


Figure 1. Forward voltage drop as a function of forward current.

TABLE 1

DEVICE	X-AXIS
SHVM2.5F	x1
SHVM5F	x2
SHVM7.5F	x3
SHVM10F	x4
SHVM12.5F	x5
SHVM15F	x6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[SHVM5F](#) [SHVM10F](#) [SHVM15F](#)