
Vishay Siliconix

COMPLIANT

D Series Power MOSFET

PRODUCT SUMMA	RY	
V _{DS} (V) at T _J max.	550)
R _{DS(on)} max. at 25 °C (Ω)	V _{GS} = 10 V	0.28
Q _g (max.) (nC)	76	
Q _{gs} (nC)	11	
Q _{gd} (nC)	17	
Configuration	Sing	le

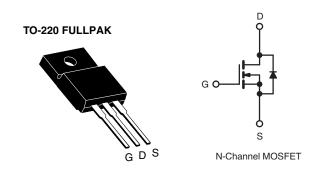

FEATURES

- Optimal Design
 - Low Area Specific On-Resistance
 - Low Input Capacitance (Ciss)
 - Reduced Capacitive Switching Losses
 - High Body Diode Ruggedness
 - Avalanche Energy Rated (UIS)
- · Optimal Efficiency and Operation
 - Low Cost
 - Simple Gate Drive Circuitry
 - Low Figure-of-Merit (FOM): Ron x Qa
 - Fast Switching
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912

Lead (Pb)-containing terminations are not RoHS-compliant. Exemptions may apply.

APPLICATIONS

- Consumer Electronics
 - Displays (LCD or Plasma TV)
- Server and Telecom Power Supplies
 - SMPS
- Industrial
 - Welding
 - Induction Heating
 - Motor Drives
- Battery Chargers

ORDERING INFORMATION	
Package	TO-220 FULLPAK
Lead (Pb)-free	SiHF18N50D-E3

ABSOLUTE MAXIMUM RATINGS (T _C = 25 °C, unless otherwise noted)							
PARAMETER			SYMBOL	LIMIT	UNIT		
Drain-Source Voltage			V_{DS}	500			
Gate-Source Voltage			V _{GS}	± 30	V		
Gate-Source Voltage AC (f > 1 Hz)				30			
Continuous Drain Current (T _J = 150 °C) ^e	\/ at 10 \/	T _C = 25 °C	l _D	18			
	V _{GS} at 10 V	$T_C = 25 \degree C$ $T_C = 100 \degree C$		11	Α		
Pulsed Drain Current ^a			I _{DM}	53			
Linear Derating Factor				0.3	W/°C		
Single Pulse Avalanche Energy ^b			E _{AS}	115	mJ		
Maximum Power Dissipation			P _D	39	W		
Operating Junction and Storage Temperature Range			T _J , T _{stg}	- 55 to + 150	°C		
Drain-Source Voltage Slope	T _J = 1	T _J = 125 °C		24	V/ns		
Reverse Diode dV/dt (d)			dV/dt	0.4	V/IIS		
Soldering Recommendations (Peak Temperature) ^c for 10 s			300	°C			

Notes

- a. Repetitive rating; pulse width limited by maximum junction temperature.
- b. $V_{DD} = 50 \text{ V}$, starting $T_J = 25 \,^{\circ}\text{C}$, $L = 2.3 \,^{\circ}\text{mH}$, $R_q = 25 \,^{\circ}\Omega$, $I_{AS} = 10 \,^{\circ}\text{A}$.
- 1.6 mm from case.
- d. $I_{SD} \le I_D$, starting $T_J = 25$ °C. e. Limited by maximum junction temperature.

Document Number: 91507



Vishay Siliconix

THERMAL RESISTANCE RATINGS				
PARAMETER	SYMBOL	TYP.	MAX.	UNIT
Maximum Junction-to-Ambient	R _{thJA}	-	65	°C/W
Maximum Junction-to-Case (Drain)	R _{thJC}	-	3.2	C/VV

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Static						•	
Drain-Source Breakdown Voltage	V _{DS}	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		500	-	-	V
V _{DS} Temperature Coefficient	$\Delta V_{DS}/T_{J}$	Reference	to 25 °C, I _D = 250 μA	-	0.58	-	V/°C
Gate Threshold Voltage (N)	V _{GS(th)}	V _{DS} =	· V _{GS} , I _D = 250 μA	3.0	-	5.0	V
Gate-Source Leakage	I _{GSS}	,	$V_{GS} = \pm 30 \text{ V}$	-	-	± 100	nA
Zero Oala Vallana Buda Oanad		V _{DS} =	V _{DS} = 500 V, V _{GS} = 0 V		-	1	
Zero Gate Voltage Drain Current	I _{DSS}	$V_{DS} = 400 \text{ V}$, V _{GS} = 0 V, T _J = 125 °C	-	-	10	μA
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} = 10 V	I _D = 9 A	-	0.23	0.28	Ω
Forward Transconductance ^a	9 _{fs}	V_{DS}	= 50 V, I _D = 9 A	-	6.4	-	S
Dynamic							
Input Capacitance	C _{iss}	$V_{GS} = 0 V$		-	1500	-	pF
Output Capacitance	C _{oss}		$V_{DS} = 100 \text{ V},$		131	-	
Reverse Transfer Capacitance	C_{rss}	f = 1.0 MHz		-	14	-	
Effective Output Capacitance, Energy Related ^a	$C_{o(er)}$	V 0 V V 0 V + 200 V		-	113	-	
Effective Output Capacitance, Time Related ^c	$C_{o(tr)}$	V _{GS} = 0	$V_{GS} = 0 \text{ V}, V_{DS} = 0 \text{ V to } 400 \text{ V}$		164	-	
Total Gate Charge	Qg			-	38	76	
Gate-Source Charge	Q _{gs}	V _{GS} = 10 V	$I_D = 9 A, V_{DS} = 400 V$	-	11	-	nC
Gate-Drain Charge	Q _{gd}			-	17	-	
Turn-On Delay Time	t _{d(on)}	$V_{DD} = 400 \text{ V}, I_{D} = 9 \text{ A}, V_{GS} = 10 \text{ V}, R_{g} = 9.1 \Omega$		-	19	38	ns
Rise Time	t _r			-	36	72	
Turn-Off Delay Time	t _{d(off)}			-	36	72	
Fall Time	t _f			-	30	60	
Gate Input Resistance	R_g	f = 1 MHz, open drain		-	1.7	-	Ω
Drain-Source Body Diode Characteristic	s						
Continuous Source-Drain Diode Current	I _S	MOSFET symbol showing the integral reverse P - N junction diode		-	-	18	
Pulsed Diode Forward Current	I _{SM}			-	-	72	- A
Diode Forward Voltage	V _{SD}	T _J = 25 °	T _J = 25 °C, I _S = 9 A, V _{GS} = 0 V		-	1.2	V
Reverse Recovery Time	t _{rr}			-	354	-	ns
Reverse Recovery Charge	Q_{rr}		$T_J = 25 ^{\circ}\text{C}, I_F = I_S = 9 \text{A},$		3.9	-	μC
Reverse Recovery Current	I _{RRM}	dl/dt = 100 A/ μ s, V _R = 20 V		-	21	-	A

Note

- a. $C_{oss(er)}$ is a fixed capacitance that gives the same energy as C_{oss} while V_{DS} is rising from 0 % to 80 % V_{DSS} .
- b. $C_{oss(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 % to 80 % V_{DSS} .



TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

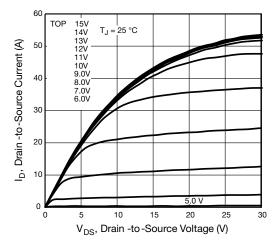


Fig. 1 - Typical Output Characteristics

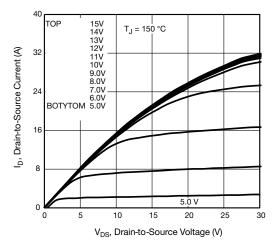


Fig. 2 - Typical Output Characteristics

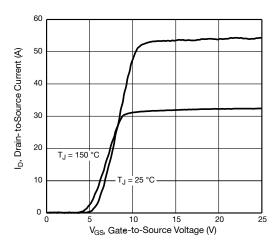


Fig. 3 - Typical Transfer Characteristics

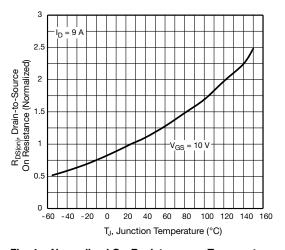


Fig. 4 - Normalized On-Resistance vs. Temperature

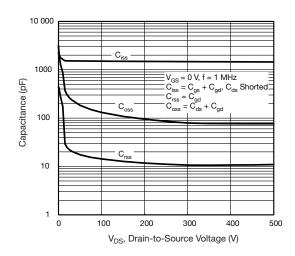


Fig. 5 - Typical Capacitance vs. Drain-to-Source Voltage

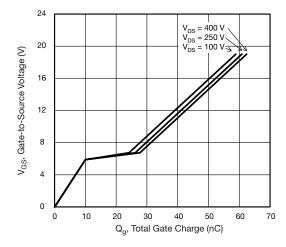


Fig. 6 - Typical Gate Charge vs. Gate-to-Source Voltage



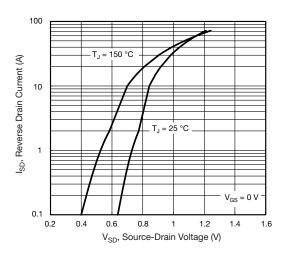


Fig. 7 - Typical Source-Drain Diode Forward Voltage

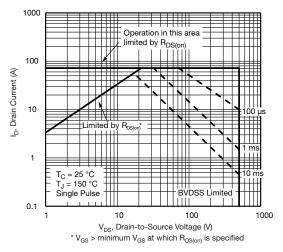


Fig. 8 - Maximum Safe Operating Area

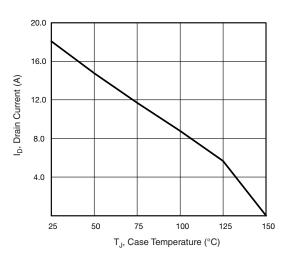


Fig. 9 - Maximum Drain Current vs. Case Temperature

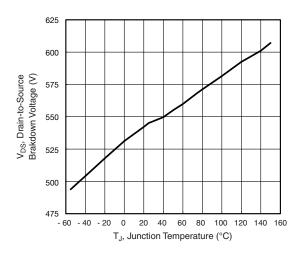


Fig. 10 - Typical Drain-to-Source Voltage vs. Temperature

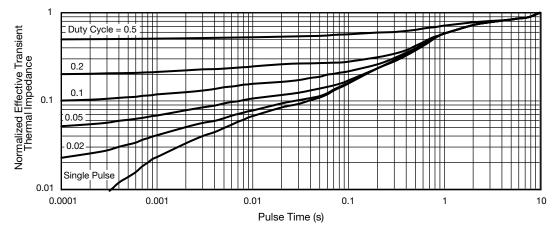


Fig. 11 - Normalized Thermal Transient Impedance, Junction-to-Case






Fig. 12 - Switching Time Test Circuit




Fig. 13 - Switching Time Waveforms

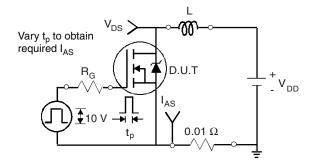


Fig. 14 - Unclamped Inductive Test Circuit




Fig. 15 - Unclamped Inductive Waveforms




Fig. 16 - Basic Gate Charge Waveform





Fig. 17 - Gate Charge Test Circuit

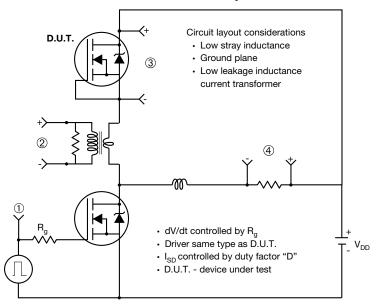

Peak Diode Recovery dV/dt Test Circuit




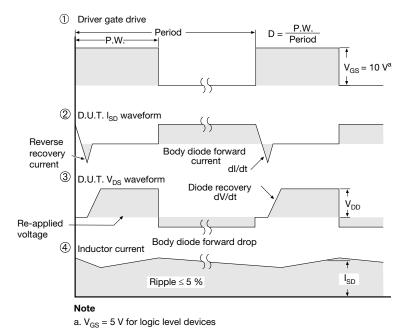



Fig. 18 - For N-Channel


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?91507.





TO-220 FULLPAK (HIGH VOLTAGE)

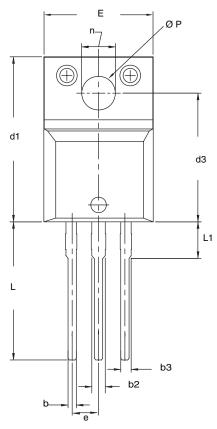

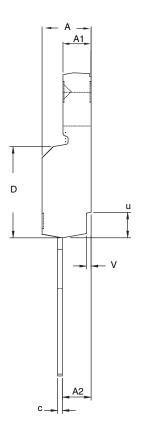

DIM.	MILLIF	METERS	INCHES		
	MIN.	MAX.	MIN.	MAX.	
Α	4.570	4.830	0.180	0.190	
A1	2.570	2.830	0.101	0.111	
A2	2.510	2.850	0.099	0.112	
b	0.622	0.890	0.024	0.035	
b2	1.229	1.400	0.048	0.055	
b3	1.229	1.400	0.048	0.055	
С	0.440	0.629	0.017	0.025	
D	8.650	9.800	0.341	0.386	
d1	15.88	16.120	0.622	0.635	
d3	12.300	12.920	0.484	0.509	
E	10.360	10.630	0.408	0.419	
е	2.54	BSC	0.100 BSC		
L	13.200	13.730	0.520	0.541	
L1	3.100	3.500	0.122	0.138	
n	6.050	6.150	0.238	0.242	
ØΡ	3.050	3.450	0.120	0.136	
u	2.400	2.500	0.094	0.098	
V	0.400	0.500	0.016	0.020	

LCN: X09-0126-Rev. B, 26-Oct-09 DWG: 5972

- To be used only for process drawing.
 These dimensions apply to all TO-220, FULLPAK leadframe versions 3 leads.
 All critical dimensions should C meet C_{pk} > 1.33.
- 4. All dimensions include burrs and plating thickness.
- 5. No chipping or package damage.

Document Number: 91359 Revision: 26-Oct-09

www.vishay.com



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.