


REV	ECN	APP'D
H	3963	JC 4/25/00
J	4127	

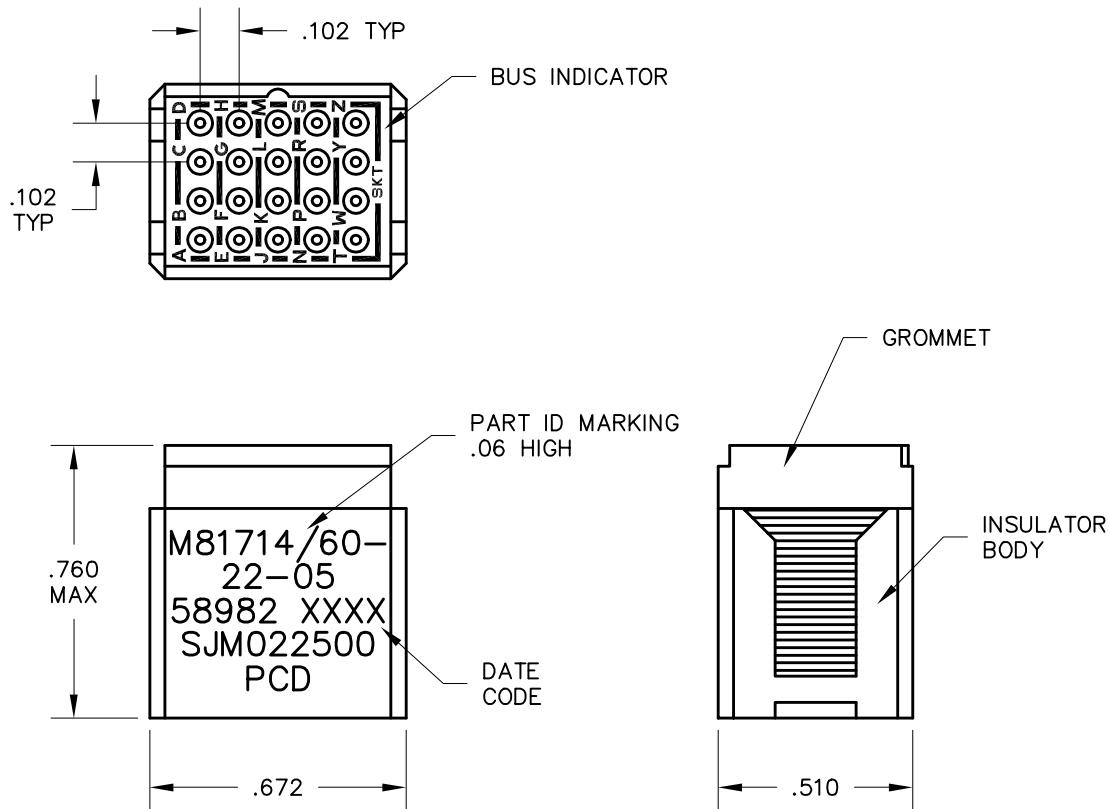

NOTES:

1. MATERIALS:  
BODY: POLYETHERIMIDE PER MIL-P-46184.  
GROMMET: SILICONE BLEND ELASTOMER.  
CONTACT RETAINERS: BERYLLIUM COPPER.  
INTERNAL PIN CONTACTS: COPPER ALLOY,  
HARD GOLD PLATE  
PER MIL-G-45204.
2. PERFORMANCE SPECIFICATIONS:  
OPERATING TEMP: -65° TO 200°C  
INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
1500 VRMS AT SEA LEVEL  
AND 200 VRMS AT 110,000 FT. ALTITUDE.  
CURRENT RATING: 5 AMPS  
VIBRATION AND SHOCK: PER MIL-T-81714,  
PARAGRAPH 3.5.5 AND 3.5.8.
3. MODULE SUPPLIED WITH 21 SOCKET CONTACTS PER  
M39029/22-191 AND TWO (2) MS27488-22 SEALING  
PLUGS.

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ± .XXX ±.010 ANGLES ±2°	PROJECTION	SPECIFICATION DRAWING		pcd	TITLE SOCKET JUNCTION MODULE SIZE 22 - 5-BUS M81714/60-22-05	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		ENGR A. PATRIE	4/19/00		SIZE A	DWG NO. SJM022500
			CHKD J. TON	4/24/00		REV J	APPD J. CAHALY 4/25/00
			CODE:	58982	SCALE:	2:1	SHEET 1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SJM022501](#)