
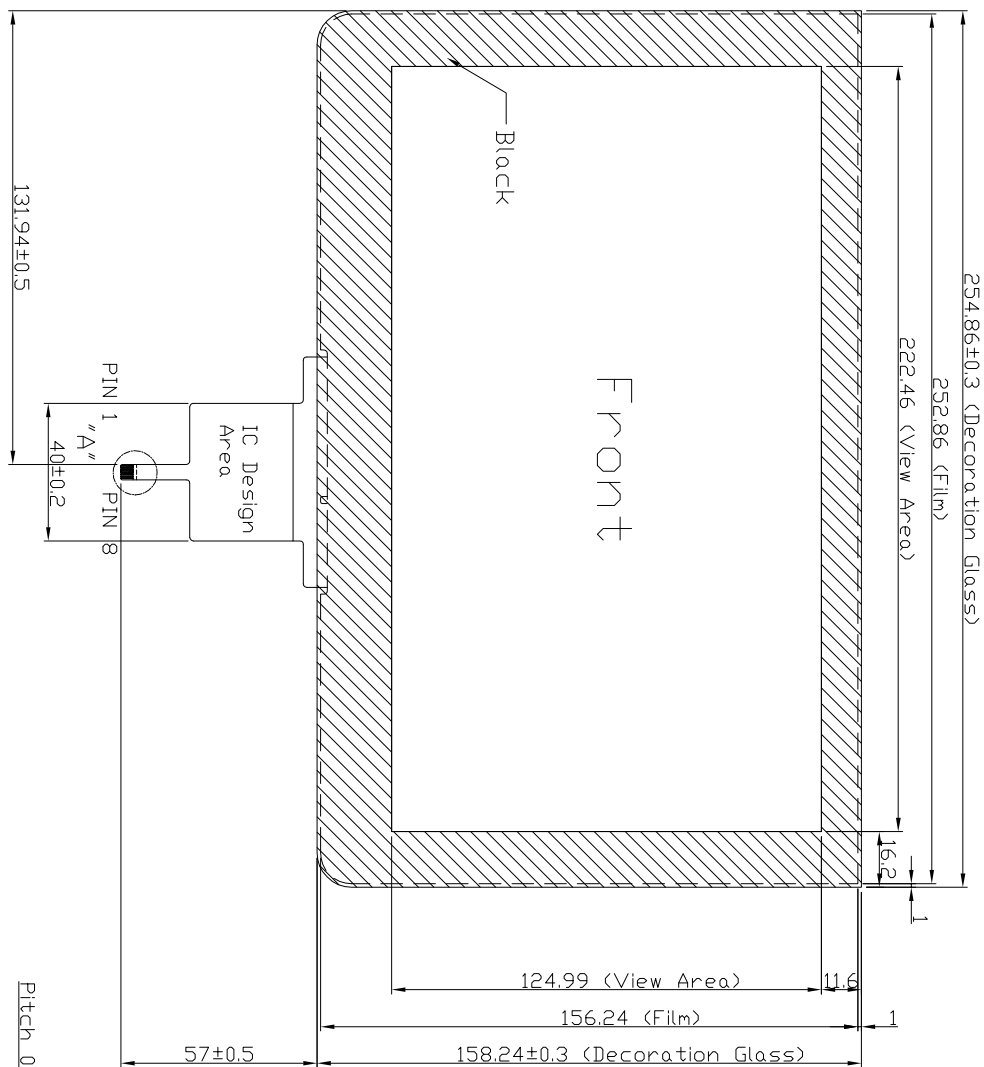


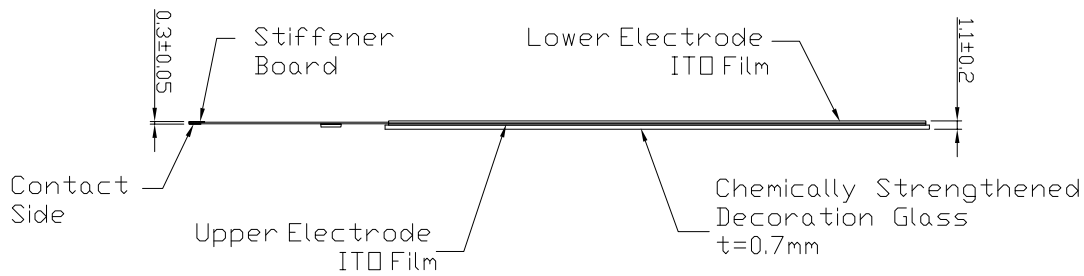

1. TOUCH PANEL PIN ASSIGNMENT

1	VCC
2	GND
3	D-
4	D+
5	XRES
6	SCL
7	SDA
8	NC


2. MATERIAL CHARACTERISTICS

Property	Requirement
Light transmission	82%
Operating temperature	-20~70° C
Storage temperature	-20~70° C
Operating Humidity	20~90%RH
Storage Humidity	20~90%RH
Surface hardness	≥ 6H

3. ELECTRICAL CHARACTERISTICS

Property	Requirement
Type	Projected Capacitive
Linearity	Max. 1.5%
Insulation resistance	20 MΩ (DC 25V)

4. Tolerance no specified: ± 0.3mm

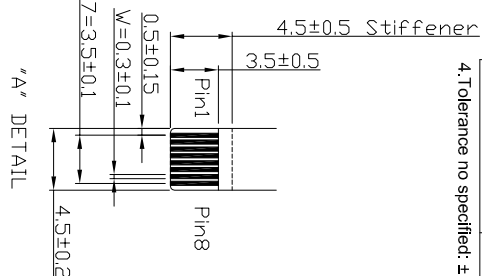

"A" DETAIL

SYMBOL	DATE	REVISED DESCRIPTIONS	NOTE	CUSTOMER APPROVED	APPROVED	CHECK	DRAWN	DWG-NO	M101H10-D02.1
--------	------	----------------------	------	-------------------	----------	-------	-------	--------	---------------

1					陳志榮	李軒漢	曾啟銘	SCALE	mm
2								UNIT	mm
3								DATE	2011.03.29
4								SHEET NO.	1/1
5									
6									