




ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± MAX
T:	6.0	± MAX
Lead Diameter	1.0	± Nom
S:	7.8	± Nom
L:	38.0	± Nom
Coating Lead Run Down (straight Leads)	4.0	± Max
B:	9.00	± Max
C:	3.00	± Nom

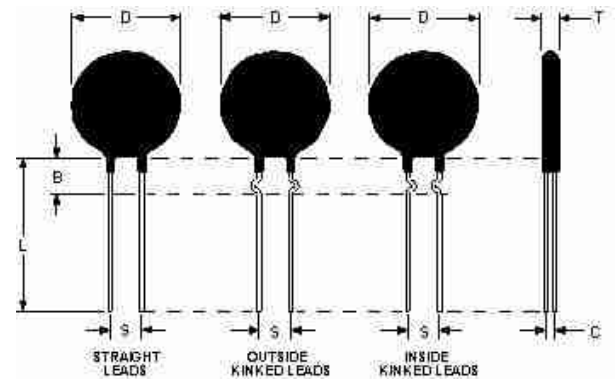

Electrical Specifications

Resistance:	0.5	Ω	± 25 %
Max Steady State Current upto 65°C:	16.00	A	
Max Rec. Energy Rating:	160	J	
Actual Failure Instantaneous Energy:	320	J	
Maximum Capacitance @ 120 VAC:	10,000	μf	
Maximum Capacitance @ 240 VAC:	2,480	μf	
Resistance @ 100% Max Current:	0.02	Ω	
Resistance @ 50% Max Current:	0.04	Ω	
Body Temperature at 100% Max Current:	184.00	°c	
Dissipation Constant:	32.4	mw/°c	
Thermal Time Constant:	94	Sec.	
Material Type (for Beta and Curve):	A		

SL22 0R516

Date: 11/11/2008

Drawn by: Erin Landis

Ametherm, Inc.
3111 N. Deer Run Road
Carson City, Nevada USA 89701
www.ametherm.com

Approved By: Mehdi Samii

Revision: a

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com