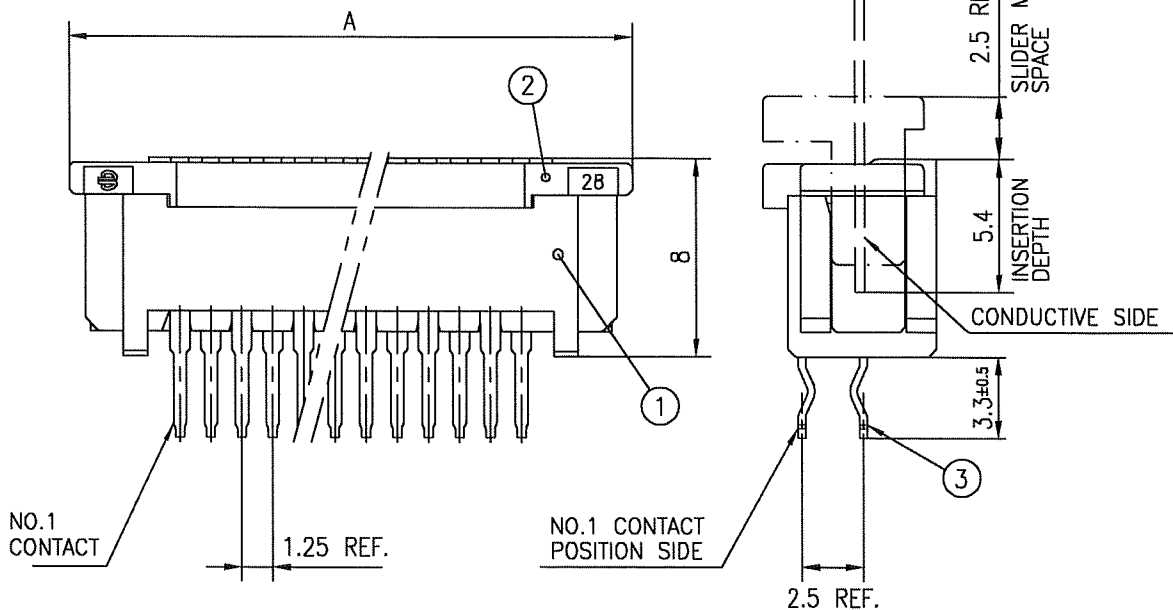
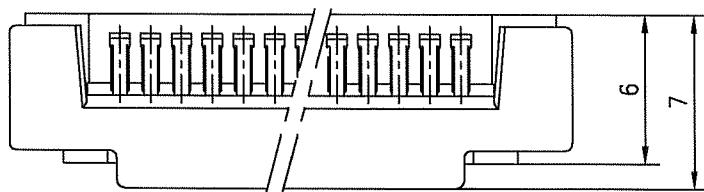








1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

2. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PBT RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : Sn Ni UNDER PLATED (LEAD FREE)

n : NO. OF CONTACTS

mat'l. code				surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101		projection 		product family 58KF		CODE JP		
ltr	ecn no	dr	date	tolerances unless otherwise specified				title 1.25mm SPACING FPC/FFC CONNECTOR (Cat. No. SLD__S-1LF)				
A	J05-0435	H.T	7/8/'05	angles	linear							±0.3
B	J05-0733	H.T	10/28/'05									
C	J06-0503	H.T	11/28/'06			scale 						
				dr		11/28/'06		dwg no		sheet 1 of 1	size	
				enr		11/28/'06		JSA 96550			A4	
				chr		11/28/'06						
				appd		11/28/'06						
sheet index				revision C				type Product Customer Drawing				

SC-SLD02 JSA96548 96549 91823 form: A4