




## TOP VIEW

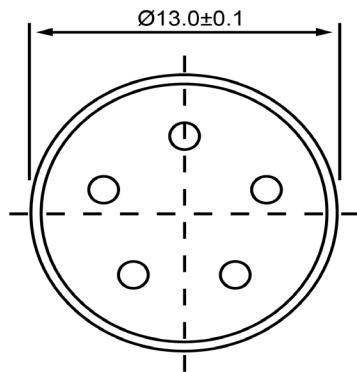

## SIDE VIEW

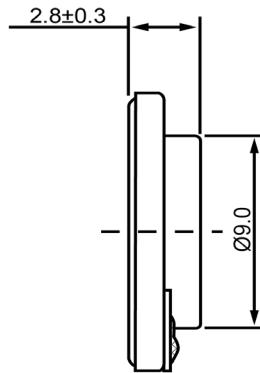

## BOTTOM VIEW

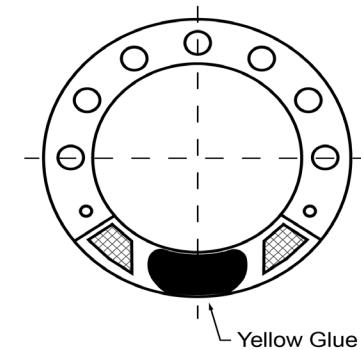

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Shape	Round			1	Released from Engineering		2/5/2014	J.S.	
Resonant Frequency	1,100	(Hz)							
Frequency Range	700 ~ 5,000	(Hz)							
SPL @ 10cm	85	(dBA)							
Impedance	8	(Ohm)							
Cone Material	Mylar								
Nominal Power	0.2	(W)							
Max Power	0.3	(W)							
Mount Type	Flush Mount			Drawn by	Date	Checked by	Date	Approved by	Date
Operating Temperature	-30 ~ +60	°C	DB UNLIMITED	G.W.	1/27/2014	C.E.	2/4/2014	J.S.	2/5/2014
Storage Temperature	-30 ~ +60	°C		Dynamic Speaker				SM131108-1	
Weight	0.8	(g)							

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SM131108-1](#)