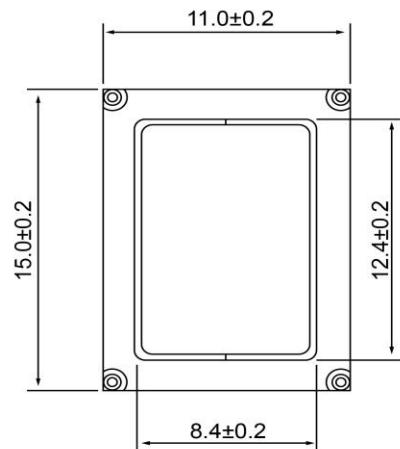
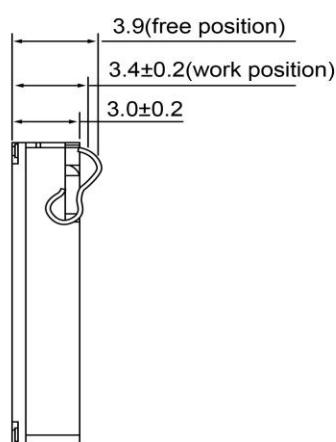

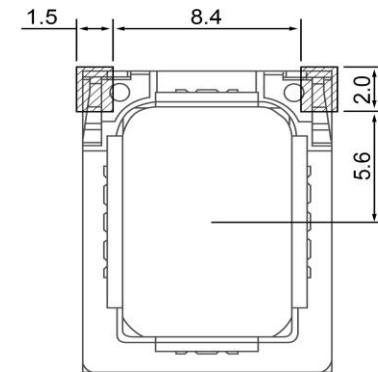


TOP VIEW**SIDE VIEW****BOTTOM VIEW****RECOMMENDABLE LAND PATTERN**

Specifications			Notes	Revision History			
Description	Value	Unit		Version	Description	Date	Approved
Shape	Rectangle		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	2/18/2015	J.S.
Resonant Frequency	500	(Hz)					
Frequency Range	500 ~ 20,000	(Hz)					
SPL @ 10cm	92	(dBA)					
Impedance	6	(Ohm)					
Cone Material	Mylar						
Nominal Power	0.7	(W)					
Max Power	1	(W)					
Mount Type	Flush Mount						
Operating Temperature	-20 ~ +70	°C					
Storage Temperature	-20 ~ +70	°C					
Weight	1.6	(g)					


DB UNLIMITED

Dynamic Micro Speaker
SM150506-1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SM150506-1](#)