




TOP VIEW

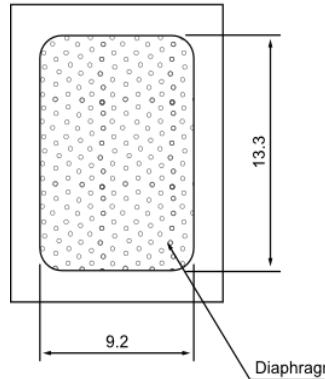


SIDE VIEW (1)

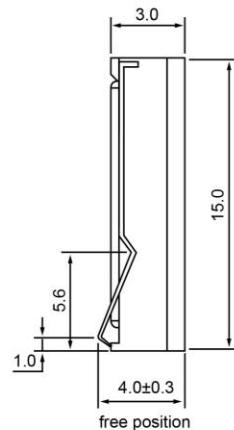


SIDE VIEW (2)



BOTTOM VIEW

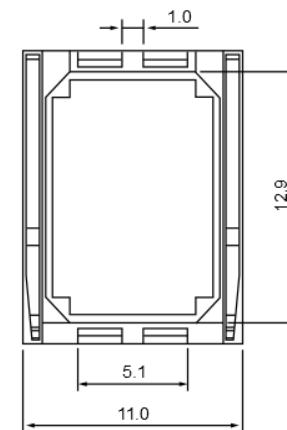

SPRING TOUCH AREA

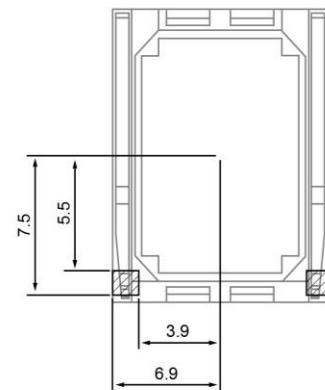

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	500	(Hz)
Frequency Range	500 ~ 20,000	(Hz)
SPL @ 10cm	89	(dBA)
Impedance	8	(Ohm)
Cone Material	Mylar	
Nominal Power	0.7	(W)
Max Power	1	(W)
Mount Type	Flush Mount	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-20 ~ +70	°C
Weight	1.5	(g)

Notes



DB UNLIMITED

sales@dbunlimitedco.com | www.dbunlimitedco.com
 ©2014, DB Unlimited

Revision History			
Version	Description	Date	Approved
1	Released from Engineering	2/18/2015	J.S.
2	Updated sound port size	4/27/2015	J.S.
Drawn by	Date	Checked by	Date
G.W.	4/27/2015	P.D.	4/27/2015

Dynamic Micro Speaker

SM150508-1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SM150508-1](#)