

- Features:
- High temperature molded encapsulation
  - Flex termination for absorbing thermal expansion
  - All welded construction
  - Non-inductive types available as NSM
  - RoHS compliant / lead-free



Electrical Specifications									
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage	Dielectric Withstanding Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance (*)				
					0.1%	0.5%	1%	5%	
SM2615	1W	25V	>500V	± 75ppm/°C ± 100ppm/°C ± 20ppm/°C	-				
					5 - 10	3 - 10	1 - 10	0.1 - 10	
					10.1 - 400		10.2 - 400	11 - 400	
SM4124	2W	50V	>500V	± 75ppm/°C ± 100ppm/°C ± 20ppm/°C	-				
					5 - 10	3 - 10	0.1 - 10		
					10.1 - 1K		10.2 - 1K	11 - 1K	
SM4527	2W	60V	>500V	± 75ppm/°C	-				
SMH4527	3W	60V	>500V	± 75ppm/°C	-				
SM6227	3W	100V	>500V	± 75ppm/°C ± 100ppm/°C ± 20ppm/°C	-				
					1 - 10				
					10.1 - 3K	10.2 - 3K	11 - 3K		
SM8035	4W	100V	>500V	± 75ppm/°C ± 100ppm/°C ± 20ppm/°C	-				
					0.05 - 0.098				
					1 - 10				
					10.1 - 5K	10.2 - 5K	11 - 5K		


Zero ohm available on all sizes

(\*) Other resistance values available - contact factory for details

Mechanical Specifications										
Type / Code	A Body Length	B Total Length	C Body Height	D Body Width	E Termination Width	F Termination Length	W	H	L	Unit
SM2615	0.260 ± 0.015 6.60 ± 0.38	0.280 ± 0.032 7.11 ± 0.81	0.140 ± 0.015 3.56 ± 0.38	0.150 ± 0.015 3.81 ± 0.38	0.100 ± 0.015 2.54 ± 0.38	0.090 ± 0.015 2.29 ± 0.38	0.138 3.51	0.130 3.30	0.350 8.89	inches mm
SM4124	0.410 ± 0.015 10.41 ± 0.38	0.430 ± 0.032 10.92 ± 0.81	0.180 ± 0.015 4.57 ± 0.38	0.240 ± 0.015 6.10 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.090 ± 0.015 2.29 ± 0.38	0.181 4.60	0.157 3.99	0.583 14.81	inches mm
SM4527(*) 0.01Ω - 0.05Ω	0.455 ± 0.015 11.56 ± 0.38	0.475 ± 0.032 12.07 ± 0.81	0.150 ± 0.015 3.81 ± 0.38	0.270 ± 0.015 6.86 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.105 ± 0.015 2.67 ± 0.38	0.169 4.29	0.157 3.99	0.587 14.91	inches mm
SMH4527	0.455 ± 0.015 11.56 ± 0.38	0.475 ± 0.032 12.07 ± 0.81	0.150 ± 0.015 3.81 ± 0.38	0.270 ± 0.015 6.86 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.105 ± 0.015 2.67 ± 0.38	0.169 4.29	0.157 3.99	0.587 14.91	inches mm
SM6227	0.625 ± 0.015 15.88 ± 0.38	0.645 ± 0.032 16.38 ± 0.81	0.250 ± 0.015 6.35 ± 0.38	0.275 ± 0.015 6.99 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.130 ± 0.015 3.30 ± 0.38	0.236 5.99	0.157 3.99	0.850 21.59	inches mm
SM8035	0.800 ± 0.015 20.32 ± 0.38	0.825 ± 0.032 20.96 ± 0.81	0.362 ± 0.015 9.19 ± 0.38	0.350 ± 0.015 8.89 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.122 ± 0.015 3.10 ± 0.38	0.340 8.64	0.157 3.99	0.950 24.13	inches mm

(\*) Dimensions will vary for values >0.05Ω - contact factory for details.


**Power Derating Curve:**

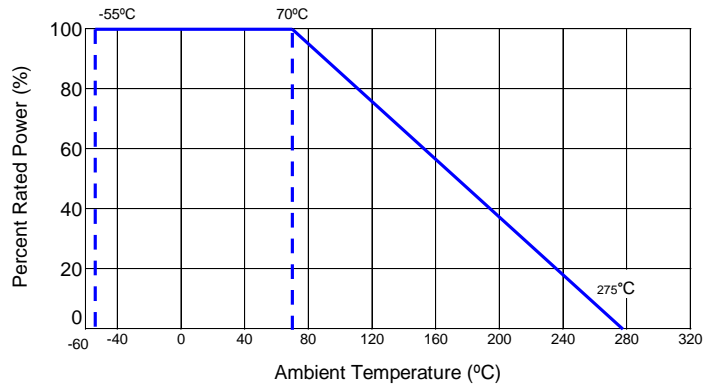


Performance Characteristics	
Test	Results
Moisture Resistance	±1%
Thermal Shock	±0.5%
Load Life @ 70°C - 1,000 hrs.	±1%
Resistance to Soldering Heat	±1
Terminal Strength	±0.5%
Dielectric Withstanding Voltage	±0.001% / V
Short Time Overload	±0.2%

Operating Temperature Range: -55°C to +275°C

**Temperature of Unit vs. % of Applied Rated Wattage**

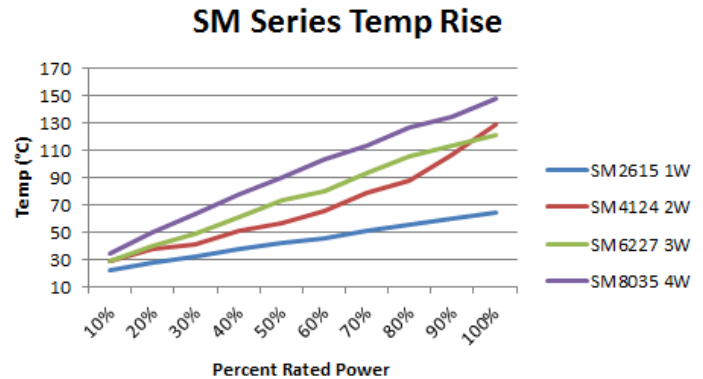

**How to Order**



Product Series	
SM	Standard
SMH	High Power
NSM	Non-inductive

Size	Power
2615	1W
4124	2W
(H)4527	3W
6227	3W
8035	4W

Tolerance	
Code	Tol
B	0.1%
D	0.5%
F	1%
J	5%
Z	Jumper

Packaging			
Code	Description	Size	Quantity
T	13" Reel Plastic Tape	2615	1,500
		4124	800
		4527, H4527	1,200
		6227	750
		8035	350

Resistance Value
Four characters with the multiplier used as the decimal holder.
"L" used as multiplier of 10 <sup>-3</sup> for any value under 0.1 ohm.
0.01 ohm = 10L0
0.1 ohm = R100
1 Kohm = 1K00
Zero ohm jumper = 0R00