

Surface Mount Automotive Transient Voltage Suppressors

High Temperature Stability and High Reliability Conditions

Patented*

*Patent #'s:
4,980,315
5,166,769
5,278,095



DO-218AB

PRIMARY CHARACTERISTICS	
V_{WM}	10 V to 36 V
P_{PPM} (10 x 1000 μ s)	3600 W
P_{PPM} (10 x 10000 μ s)	2800 W
P_D	5 W
I_{FSM}	500 A
T_J max.	175 °C

FEATURES

- Patented PAR[®] construction
- Available in uni-directional polarity only
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO7637-2 surge spec (varied by test condition)
- Meets MSL level 1, per J-STD-020C, LF max peak of 245 °C
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

MECHANICAL DATA

Case: DO-218AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Heatsink is anode

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Peak pulse power dissipation	with 10/1000 μ s waveform with 10/10000 μ s waveform	P_{PPM}	3600 2800	W
Power dissipation on infinite heatsink at $T_C = 25$ °C (Fig. 1)		P_D	5.0	W
Peak pulse current with 10/1000 μ s waveform ⁽¹⁾		I_{PPM}	See next table	A
Peak forward surge current 8.3 ms single half sine-wave		I_{FSM}	500	A
Operating junction and storage temperature range		T_J, T_{STG}	- 55 to + 175	°C

Note:

(1) Non-repetitive current pulse at $T_A = 25$ °C



ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE V_{BR} (V)		TEST CURRENT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA)	MAXIMUM REVERSE LEAKAGE AT V_{WM} $T_J = 175\text{ }^\circ\text{C}$ I_D (μA)	MAX. PEAK PULSE CURRENT AT 10/1000 μs WAVEFORM (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)
	MIN	MAX						
SM5S10	11.1	13.6	5.0	10.0	15	250	191	18.8
SM5S10A	11.1	12.3	5.0	10.0	15	250	212	17.0
SM5S11	12.2	14.9	5.0	11.0	10	150	179	20.1
SM5S11A	12.2	13.5	5.0	11.0	10	150	198	18.2
SM5S12	13.3	16.3	5.0	12.0	10	150	164	22.0
SM5S12A	13.3	14.7	5.0	12.0	10	150	181	19.9
SM5S13	14.4	17.6	5.0	13.0	10	150	151	23.8
SM5S13A	14.4	15.9	5.0	13.0	10	150	167	21.5
SM5S14	15.6	19.1	5.0	14.0	10	150	140	25.8
SM5S14A	15.6	17.2	5.0	14.0	10	150	155	23.2
SM5S15	16.7	20.4	5.0	15.0	10	150	134	26.9
SM5S15A	16.7	18.5	5.0	15.0	10	150	148	24.4
SM5S16	17.8	21.8	5.0	16.0	10	150	125	28.8
SM5S16A	17.8	19.7	5.0	16.0	10	150	138	26.0
SM5S17	18.9	23.1	5.0	17.0	10	150	118	30.5
SM5S17A	18.9	20.9	5.0	17.0	10	150	130	27.6
SM5S18	20.0	24.4	5.0	18.0	10	150	112	32.2
SM5S18A	20.0	22.1	5.0	18.0	10	150	123	29.2
SM5S20	22.2	27.1	5.0	20.0	10	150	101	35.8
SM5S20A	22.2	24.5	5.0	20.0	10	150	111	32.4
SM5S22	24.4	29.8	5.0	22.0	10	150	91	39.4
SM5S22A	24.4	26.9	5.0	22.0	10	150	101	35.5
SM5S24	26.7	32.6	5.0	24.0	10	150	84	43.0
SM5S24A	26.7	29.5	5.0	24.0	10	150	93	38.9
SM5S26	28.9	35.3	5.0	26.0	10	150	77	46.6
SM5S26A	28.9	31.9	5.0	26.0	10	150	86	42.1
SM5S28	31.1	38.0	5.0	28.0	10	150	72	50.1
SM5S28A	31.1	34.4	5.0	28.0	10	150	79	45.4
SM5S30	33.3	40.7	5.0	30.0	10	150	67	53.5
SM5S30A	33.3	36.8	5.0	30.0	10	150	74	48.4
SM5S33	36.7	44.9	5.0	33.0	10	150	61	59.0
SM5S33A	36.7	40.6	5.0	33.0	10	150	68	53.3
SM5S36	40.0	48.9	5.0	36.0	10	150	56	64.3
SM5S36A	40.0	44.2	5.0	36.0	10	150	62	58.1

Note:

For all types maximum $V_F = 2.0\text{ V}$ at $I_F = 100\text{ A}$ measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to case	$R_{\theta JC}$	1.0	$^\circ\text{C/W}$

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SM5S10AHE3/2D ⁽¹⁾	2.505	2D	750	13" diameter paper tape and reel, anode towards the sprocket hole

Note:

(1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

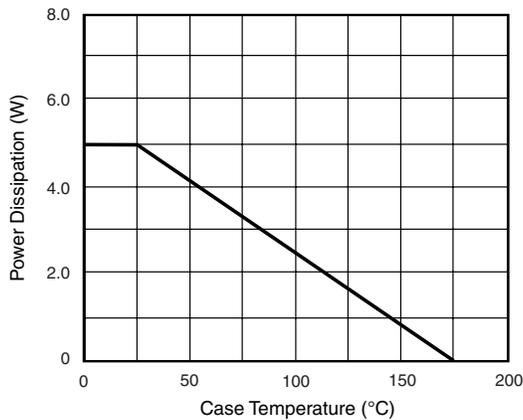


Figure 1. Power Derating Curve

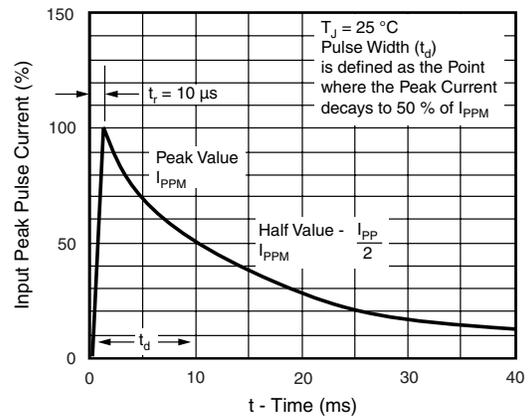


Figure 3. Pulse Waveform

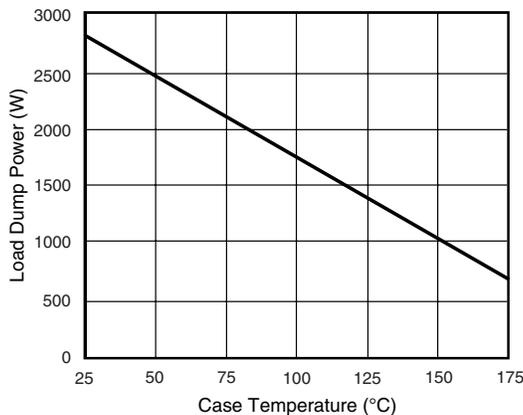


Figure 2. Load Dump Power Characteristics (10 ms Exponential Waveform)

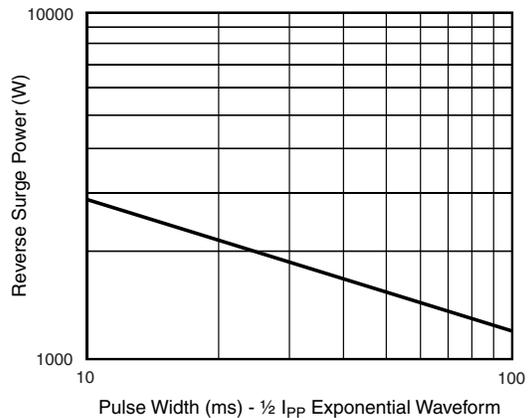


Figure 4. Reverse Power Capability


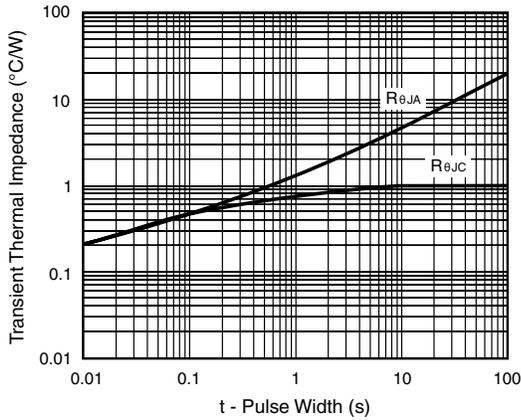


Figure 5. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



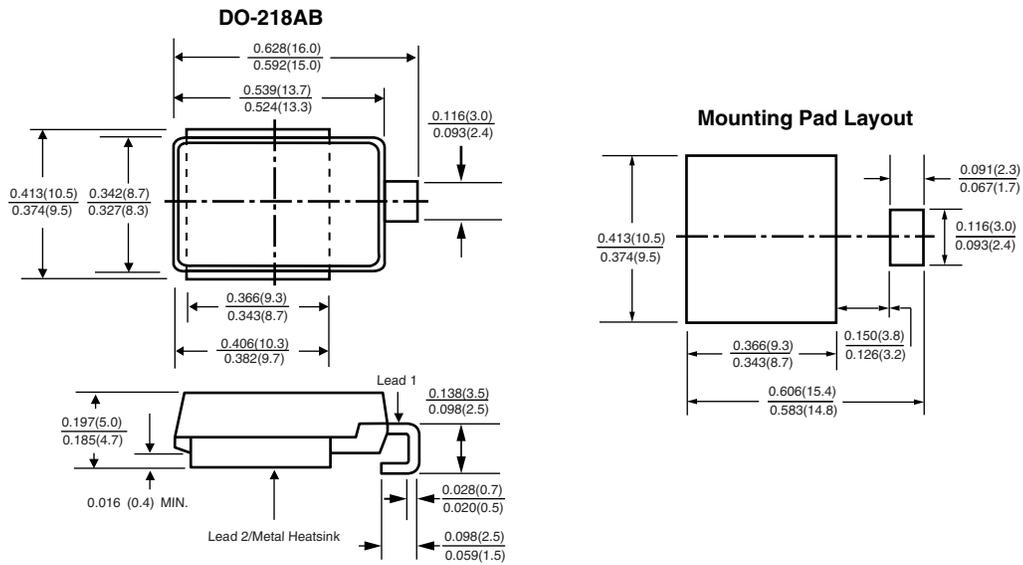

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[SM5S14A/2D](#) [SM5S14AHE3/2D](#) [SM5S15AHE3/2D](#) [SM5S16A/2D](#) [SM5S16A-E3/2D](#) [SM5S16AHE3/2D](#)
[SM5S17AHE3/2D](#) [SM5S18A/2D](#) [SM5S18AHE3/2D](#) [SM5S18HE3/2D](#) [SM5S20/2D](#) [SM5S20A/2D](#) [SM5S20AHE3/2D](#)
[SM5S20HE3/2D](#) [SM5S22A/2D](#) [SM5S22A/2E](#) [SM5S22A-E3/2D](#) [SM5S22AHE3/2D](#) [SM5S22AHE3/2E](#)
[SM5S22HE3/2D](#) [SM5S24/2D](#) [SM5S24A/2D](#) [SM5S24A-E3/2D](#) [SM5S24AHE3/2D](#) [SM5S24-E3/2D](#) [SM5S24HE3/2D](#)
[SM5S26A/2D](#) [SM5S26A-E3/2D](#) [SM5S26AHE3/2D](#) [SM5S26HE3/2D](#) [SM5S28/2D](#) [SM5S28AHE3/2D](#) [SM5S28HE3/2D](#)
[SM5S28HE3/2E](#) [SM5S30/2D](#) [SM5S30AHE3/2D](#) [SM5S30HE3/2D](#) [SM5S33A/2D](#) [SM5S33A/2E](#) [SM5S33A-E3/2D](#)
[SM5S33AHE3/2D](#) [SM5S33HE3/2D](#) [SM5S36A/2D](#) [SM5S36A/2E](#) [SM5S36A-E3/2D](#) [SM5S36AHE3/2D](#)
[SM5S36AHE3/2E](#) [SM5S36HE3/2D](#) [SM5S14A-E3/2D](#) [SM5S15A/2D](#) [SM5S15A-E3/2D](#) [SM5S17A/2D](#) [SM5S17A-](#)
[E3/2D](#) [SM5S18/2D](#) [SM5S18A-E3/2D](#) [SM5S18-E3/2D](#) [SM5S20A-E3/2D](#) [SM5S20-E3/2D](#) [SM5S22/2D](#) [SM5S22A-](#)
[E3/2E](#) [SM5S22-E3/2D](#) [SM5S26/2D](#) [SM5S26-E3/2D](#) [SM5S28/2E](#) [SM5S28A/2D](#) [SM5S28A-E3/2D](#) [SM5S28-E3/2D](#)
[SM5S28-E3/2E](#) [SM5S30A/2D](#) [SM5S30A-E3/2D](#) [SM5S30-E3/2D](#) [SM5S33/2D](#) [SM5S33-E3/2D](#) [SM5S36/2D](#)
[SM5S36A-E3/2E](#) [SM5S36-E3/2D](#)