


Surface Mount Zener Diodes

FEATURES

- Plastic package has underwriters laboratory flammability classification 94 V-0
- For surface mounted applications
- Low Zener impedance
- Low regulation factor
- High temperature soldering guaranteed: 260 °C/10 s at terminals
- Standard voltage tolerance is 10 %, suffix A \pm 5 %
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



15811

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic over passivated junction

Terminals: solder plated, solderable per MIL-STD- 750, method 2026

Polarity: color band denotes positive end (cathode)

Mounting Position: any

Weight: 0.002 ounce, 64 mg

Packaging Codes/Options (antistatic):

SML4728 - SML4764A:

61 to 1.8K per 7" plastic reel (12 mm tape)
5A to 7.5K per 13" plastic reel (12 mm tape)

Absolute Maximum Ratings

T_{amb} = 25 °C, unless otherwise specified

| Parameter | Test condition | Symbol | Value | Unit |
|-------------------|------------------------|------------------|-------|------|
| Power dissipation | T _L = 75 °C | P _{tot} | 1.0 | W |

Thermal Characteristics

T_{amb} = 25 °C, unless otherwise specified

| Parameter | Test condition | Symbol | Value | Unit |
|------------------------------|----------------|----------------|---------------|------|
| Maximum junction temperature | | T _j | 150 | °C |
| Storage temperature range | | T _S | - 65 to + 150 | °C |

SML4728 to SML4764A



Vishay Semiconductors

Electrical Characteristics

| Partnumber | Device Marking Code | Nominal Zener Voltage | Test Current | Maximum Dynamic ImpedanceResistance | | | Maximum DC Reverse Leakage Current | | Maximum Surge Current |
|------------|---------------------|-------------------------|--------------|-------------------------------------|----------------------|----------|------------------------------------|-------|-----------------------|
| | | $V_Z^{(1)}$ at I_{ZT} | I_{ZT} | Z_{ZT} at I_{ZT} | Z_{ZK} at I_{ZK} | I_{ZK} | I_R | V_R | $I_{RM}^{(2)}$ |
| | | V | mA | Ω | Ω | mA | μ A | V | mA |
| SML4728 | 3P3 | 3.3 | 76 | 10 | 400 | 1 | 100 | 1 | 1380 |
| SML4729 | 3P6 | 3.6 | 69 | 10 | 400 | 1 | 100 | 1 | 1260 |
| SML4730 | 3P9 | 3.9 | 64 | 9 | 400 | 1 | 50 | 1 | 1190 |
| SML4731 | 4P3 | 4.3 | 58 | 9 | 400 | 1 | 10 | 1 | 1070 |
| SML4732 | 4P7 | 4.7 | 53 | 8 | 500 | 1 | 10 | 1 | 970 |
| SML4733 | 5P1 | 5.1 | 49 | 7 | 550 | 1 | 10 | 1 | 890 |
| SML4734 | 5P6 | 5.6 | 45 | 5 | 600 | 1 | 10 | 2 | 810 |
| SML4735 | 6P2 | 6.2 | 41 | 2 | 700 | 1 | 10 | 3 | 730 |
| SML4736 | 6P8 | 6.8 | 37 | 3.5 | 700 | 1 | 10 | 4 | 660 |
| SML4737 | 7P5 | 7.5 | 34 | 4 | 700 | 0.5 | 10 | 5 | 605 |
| SML4738 | 8P2 | 8.2 | 31 | 4.5 | 700 | 0.5 | 10 | 6 | 550 |
| SML4739 | 9P1 | 9.1 | 28 | 5 | 700 | 0.5 | 10 | 7 | 500 |
| SML4740 | 10 | 10 | 25 | 7 | 700 | 0.25 | 10 | 7.6 | 454 |
| SML4741 | 11 | 11 | 23 | 8 | 700 | 0.25 | 5 | 8.4 | 414 |
| SML4742 | 12 | 12 | 21 | 9 | 700 | 0.25 | 5 | 9.1 | 380 |
| SML4743 | 13 | 13 | 19 | 10 | 700 | 0.25 | 5 | 9.9 | 344 |
| SML4744 | 15 | 15 | 17 | 14 | 700 | 0.25 | 5 | 11.4 | 305 |
| SML4745 | 16 | 16 | 15.5 | 16 | 700 | 0.25 | 5 | 12.2 | 285 |
| SML4746 | 18 | 18 | 14 | 20 | 750 | 0.25 | 5 | 13.7 | 250 |
| SML4747 | 20 | 20 | 12.5 | 22 | 750 | 0.25 | 5 | 15.2 | 225 |
| SML4748 | 22 | 22 | 11.5 | 23 | 750 | 0.25 | 5 | 16.7 | 205 |
| SML4749 | 24 | 24 | 10.5 | 25 | 750 | 0.25 | 5 | 18.2 | 190 |
| SML4750 | 27 | 27 | 9.5 | 35 | 750 | 0.25 | 5 | 20.6 | 170 |
| SML4751 | 30 | 30 | 8.5 | 40 | 1000 | 0.25 | 5 | 22.8 | 150 |
| SML4752 | 33 | 33 | 7.5 | 45 | 1000 | 0.25 | 5 | 25.1 | 135 |
| SML4753 | 36 | 36 | 7 | 50 | 1000 | 0.25 | 5 | 27.4 | 125 |
| SML4754 | 39 | 39 | 6.5 | 60 | 1000 | 0.25 | 5 | 29.7 | 115 |
| SML4755 | 43 | 43 | 6 | 70 | 1500 | 0.25 | 5 | 32.7 | 110 |
| SML4756 | 47 | 47 | 5.5 | 80 | 1500 | 0.25 | 5 | 35.8 | 95 |
| SML4757 | 51 | 51 | 5 | 95 | 1500 | 0.25 | 5 | 38.8 | 90 |
| SML4758 | 56 | 56 | 4.5 | 110 | 2000 | 0.25 | 5 | 42.6 | 80 |
| SML4759 | 62 | 62 | 4 | 125 | 2000 | 0.25 | 5 | 47.1 | 70 |
| SML4760 | 68 | 68 | 3.7 | 150 | 2000 | 0.25 | 5 | 51.7 | 65 |
| SML4761 | 75 | 75 | 3.3 | 175 | 2000 | 0.25 | 5 | 56 | 60 |
| SML4762 | 82 | 82 | 3 | 200 | 3000 | 0.25 | 5 | 62.2 | 55 |
| SML4763 | 91 | 91 | 2.8 | 250 | 3000 | 0.25 | 5 | 69.2 | 50 |
| SML4764 | 100 | 100 | 2.5 | 350 | 3000 | 0.25 | 5 | 76 | 45 |

Notes:

(1) Based on dc- measurement at thermal equilibrium

(2) Surge current is a non-repetitive, 8.3 ms pulse width square wave or equivalent sine-wave superimposed on I_{ZT} per JEDEC method

TYPICAL CHARACTERISTICS

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

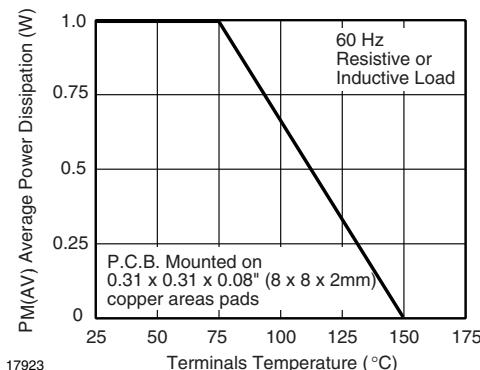


Fig. 1 - Maximum Continuous Power Dissipation

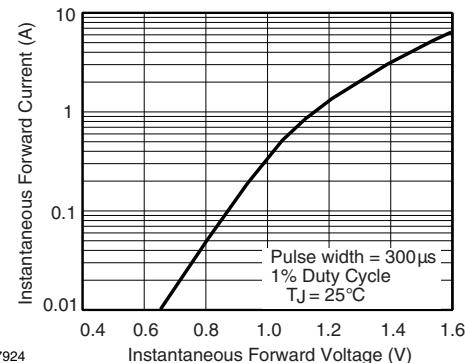


Fig. 4 - Typical Instantaneous Forward Characteristics for SML4763

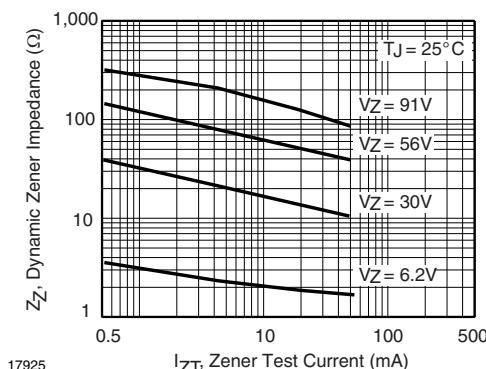


Fig. 2 - Typical Zener Impedance

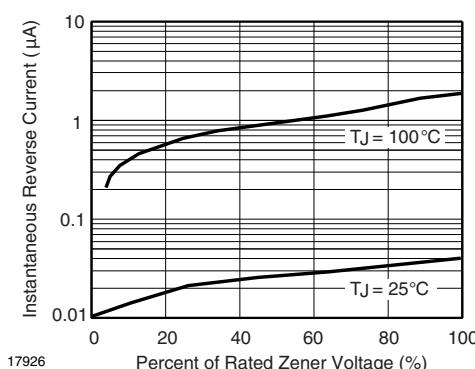


Fig. 5 - Typical Reverse Characteristics

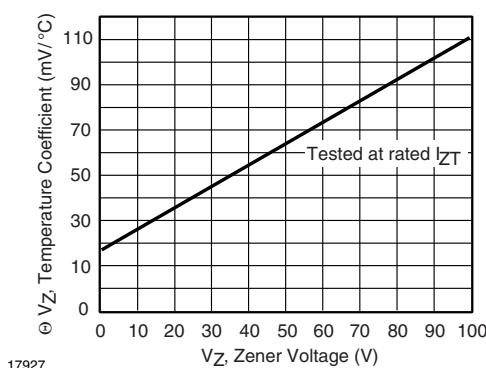



Fig. 3 - Typical Temperature Coefficients

SML4728 to SML4764A



Vishay Semiconductors

PACKAGE DIMENSIONS in millimeters (Inches)

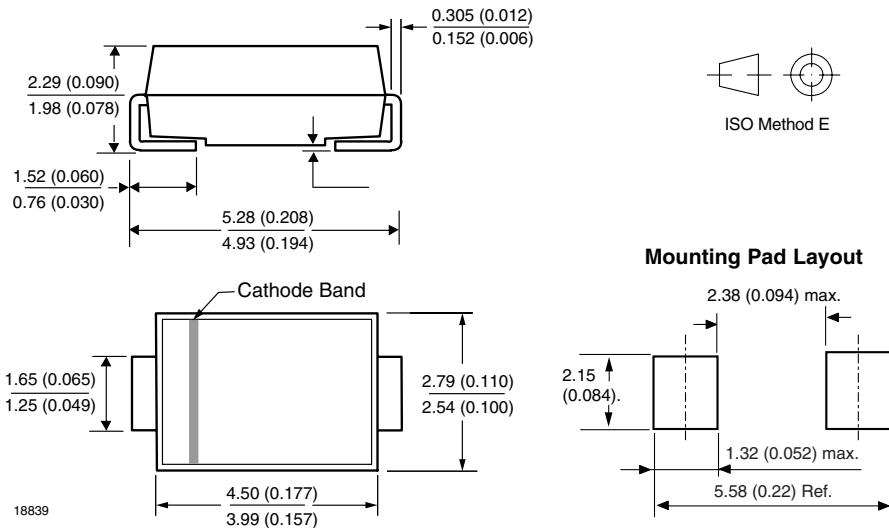

Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively.
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA.
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.