
SPECIFICATIONS					
PARAMETERS	VALUES	UNIT			
RATED VOLTAGE	3	Vp-p			
OPERATING VOLTAGE RANGE	2 ~ 4	Vp-p mA			
RATED CURRENT (MAX)	100				
COIL RESISTANCE	12 ± 2	OHM			
MINIMUM SPL @ 10 CM	78	dBA			
RESONANT FREQUENCY	4,000 ± 500	Hz			
OPERATING TEMPERATURE	-30 ~ +70	°C			
STORAGE TEMPERATURE	-40 ~ +85	°C			
HOUSING MATERIAL	LCP	-			
TERMINAL MATERIAL	Au PLATED PHOSPHOR BRONZE	-			
WEIGHT	0.25	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHEITED.

©2003, Projech Bullimited Inc.

П				
	LTR	DESCRIPTION	DATE	APPROVED
[-	RELEASED FROM ENGINEERING	6/18/2008	
	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	6/4/2010	B.R.

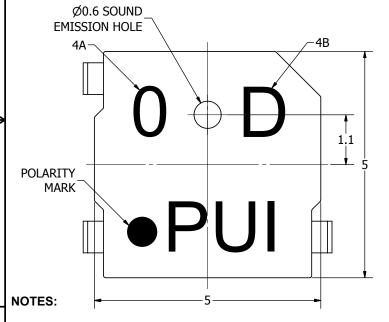

O.7 ± 0.1 (3)

YOKE PLATE

0.7 ± 0.1 (3)

0.7 ± 0.05 (3)

1.95

LEAD (-)

0.8 ± 0.2 (3)

5.5 MAX.

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- 4. DATE CODE:
 - A. FIRST DIGIT REPRESENTS THE NO. OF THE YEAR.
 - B. LAST DIGIT REPRESENTS THE MONTH. (A-JAN~L-DEC.)

UNLESS OTHERWISE SPECIFIED:		Designed by	Date	Checked by	
	SIZE	J.D.	6/18/2008	C	.W.
DIMENSIONS ARE IN MILLIMETERS,		\sim			
TOLERANCES ARE ±0.5 AND	pul.				
ANGLES ARE ±3°.	, (0		al idic	™	Tra
SMT-0540-	T-7-R.idw		a projects unlimited co	nc mpany	Tra

 $\begin{array}{c|c} SMT-0540-T-7-R \\ \hline Transducer (Electro-Mech) & Edition & Sheet \\ - & 1/1 \end{array}$

Date

6/18/2008

Drawn Date

6/4/2010

Approved by

B.R.

Date

6/18/2008

4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: SMT-0540-T-7-R