


SPECIFICATIONS



PARAMETERS	VALUES	UNITS
RATED VOLTAGE	3	V _{p-p}
OPERATING VOLTAGE RANGE	3 ~ 4.5	V _{p-p}
RATED CURRENT (MAX)	90	mA
COIL RESISTANCE	18 ± 3	OHM
MINIMUM SPL @ 10 CM	87	dBA
RESONANT FREQUENCY	2,700 ± 500	Hz
OPERATING TEMPERATURE	-40 ~ +85	°C
STORAGE TEMPERATURE	-50 ~ +85	°C
HOUSING MATERIAL	PA46	-
TERMINAL MATERIAL	Sn PLATED PHOSPHOR BRONZE	-
WEIGHT	1	grams

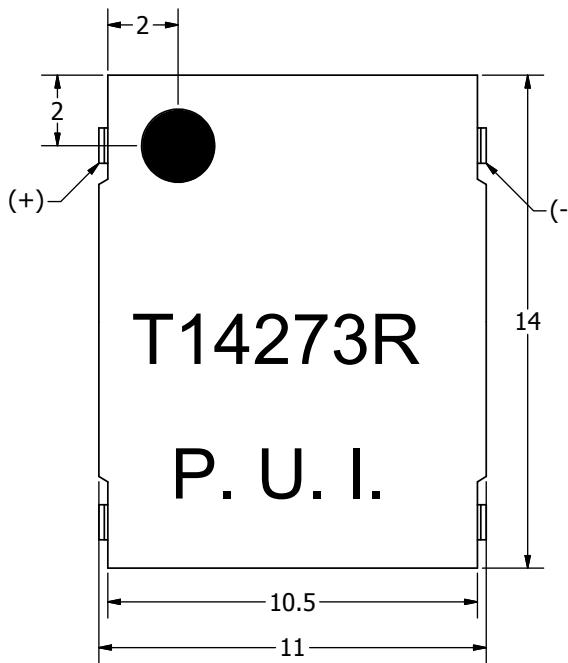

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO
PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED,
INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	2/10/2006	
A	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	5/7/2010	B.R.

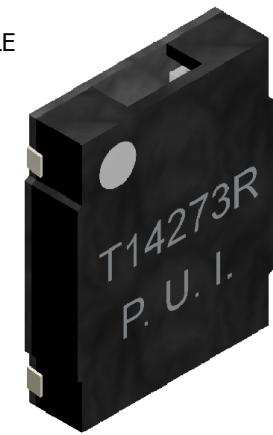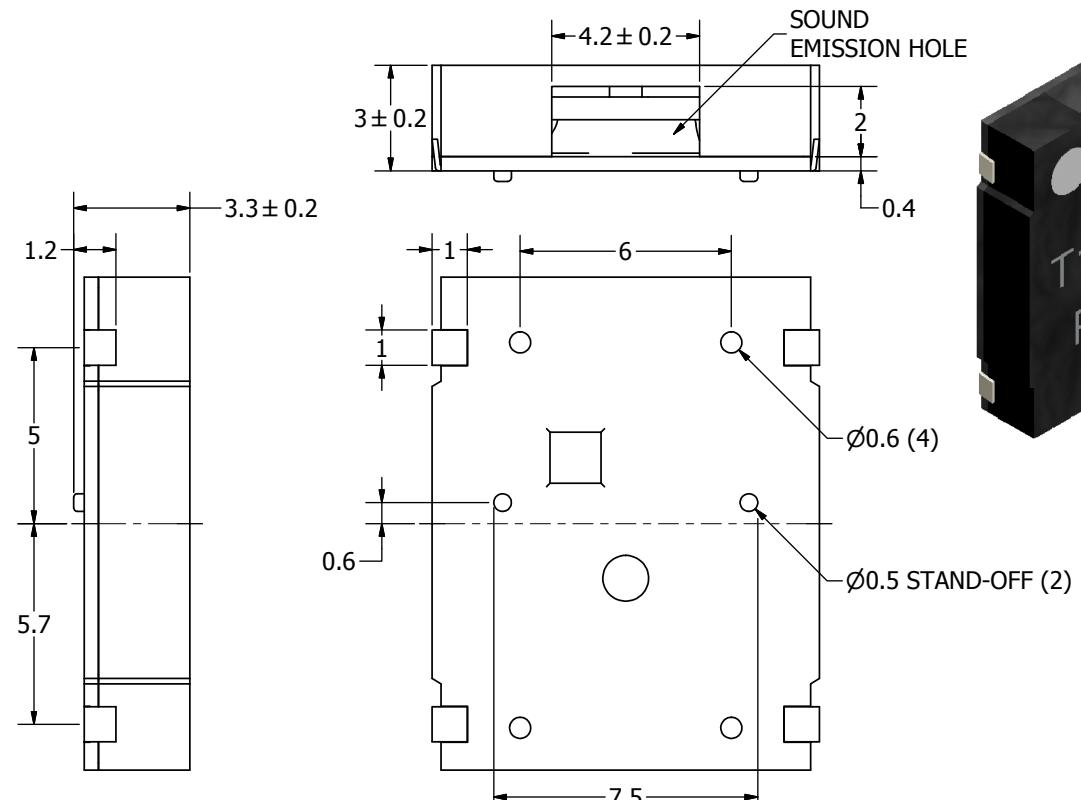

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL
WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE
SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS,
TOLERANCES
ARE ±0.5 AND
ANGLES ARE ±3°.
SMT-1427-S-3-R.idw

SIZE
A3

Designed by J.A.F.	Date 2/10/2006	Checked by E.P.	Date 2/10/2006	Approved by B.R.	Date 2/10/2006	Drawn Date 5/7/2010
-----------------------	-------------------	--------------------	-------------------	---------------------	-------------------	------------------------

 pui
audio™
inc
a projects unlimited company

SMT-1427-S-3-R

Transducer (Electro-Mech)

Edition
-
Sheet
1 / 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[SMT-1427-S-3-R](#)