
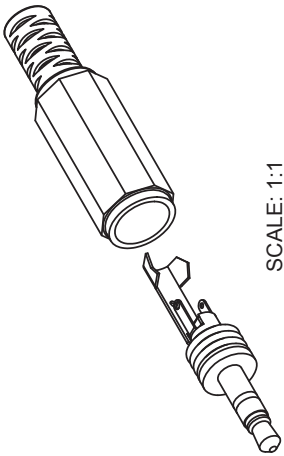


REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/9/2008

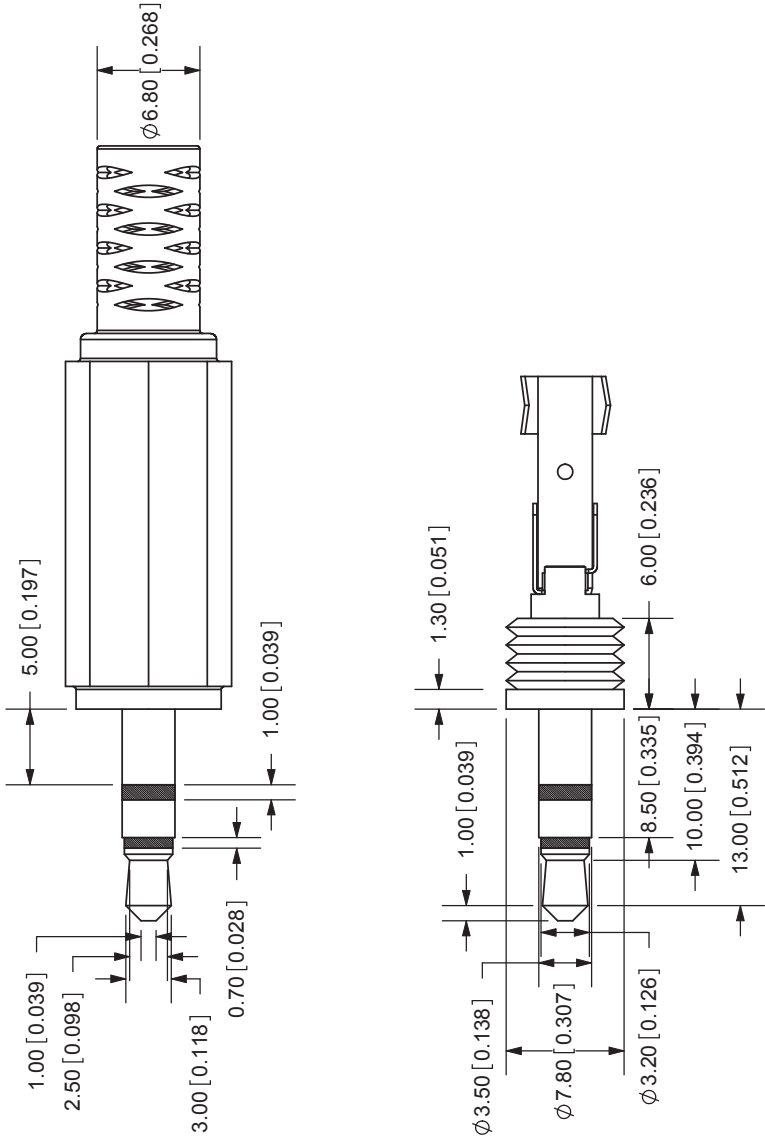

TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED

SPECIFICATIONS:

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC.

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

OPERATING TEMP: -20° ~ +85°C

	MATERIAL	PLATING
RING TERMINAL	Brass	Nickel
TIP TERMINAL	Brass	Nickel
EARTH TERMINAL	Brass	Nickel
SLEEVE	Brass	Nickel
CONTACT HEAD	Brass	Nickel
INSULATOR	POM	black color
BODY	PE	black color

 20050 SW 112th Ave. Tualatin, OR 97062 Phone: 503-612-2300 800-275-4899 Fax: 503-612-2383 Website: www.cui.com	
TITLE: 3.5mm STEREO PLUG	REV: A
PART NO: SP-3501	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
SCALE: 2:1	