



Solder Pot - 2 lb. capacity, Electronic

SP-EL

Plato shears have a thin profile designed for those hard-to-reach areas in electronic assembly. Assemblers love the effortless shearing action, comfort, light weight, and safety for electronics lead and wire cutting. Platoshears use the shear cutting method, which requires 50% less operator effort and extends cutting life because they shear rather than pinch. Handles are cushioned for day long comfort, and automatically spring back to their original position after each use.

Plato solder pots are ideal for tinning lead wires, pre-tinning small electrical parts, or dip soldering small assemblies and circuit devices. **Porcelain Coated Crucibles** Plato's porcelain coated crucible is easy to clean and offers a long service life. Solder will not adhere to the porcelainized surface, allowing for easy maintenance. The coating also resists the corrosion common with activated fluxes and high tin content solders. All Plato solder pots can be ordered with a porcelain coated crucible by adding a "P" to the end of the part number.



Precision electronic controlled solder pots


Plato's Precision Solder Pots exceed the requirements of military specifications ANSI (J-STD-001B). The pots control temperatures to $\pm 5^{\circ}\text{F}$ ($\pm 2.75^{\circ}\text{C}$) of a preselected setting from ambient to 925°F (496°C) and have an LCD temperature display.

- Safety heat shield
- Removable dross tray for easy cleaning
- 2.5" (64mm) diameter by 1.5" (38mm) deep crucible
- LCD that displays preset temperature and operating temperature
- Limits transient voltage spiking to 2mV peak-to-peak or less for voltage sensitive

Product Dimensions

SP-150TP 350W Precision Solder Pot w/Porcelain Crucible - 240V


1 units/case

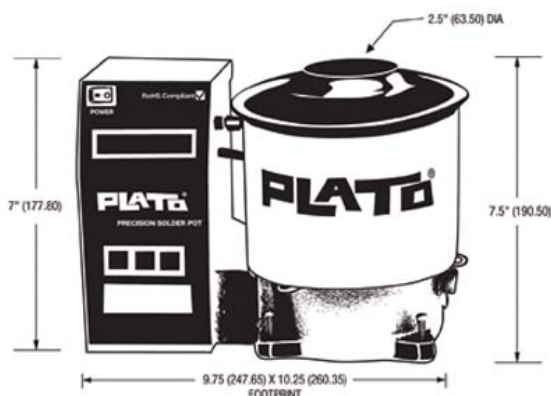



SP-500T 350W Precision Solder Pot - 120V

1 units/case

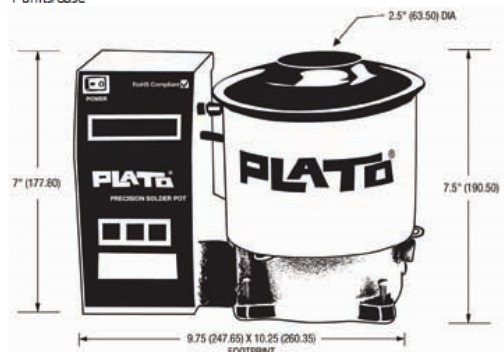

SP-500TP 350W Precision Solder Pot w/Porcelain Crucible - 120V

1 units/case



Environmental Policy

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

North America

Techspray
P.O. Box 949
Amarillo, TX 79105
800-858-4043
Email: tsales@techspray.com

Europe

ITW Contamination Control
Saffierlaan 5
2132 VZ Hoofddorp
The Netherlands
+31 88 1307 400
Email: info@itw-cc.com

Countries Outside US

Call to locate a distributor in your country.



Techspray
P.O. Box 949, Amarillo, TX 79105
800-858-4043 • www.techspray.com



Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

© 2013 Techspray, A Division of ITW