


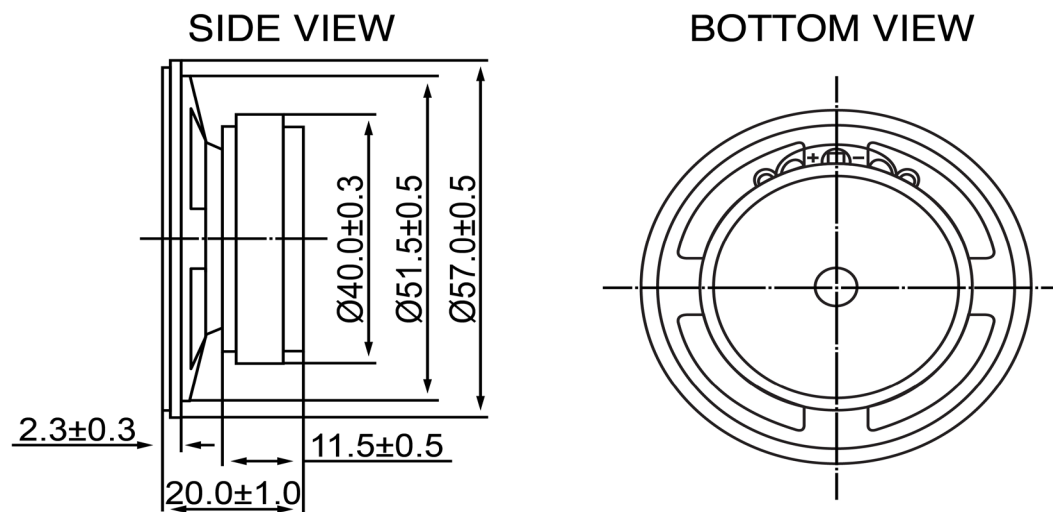

Specifications			Notes	Revision History								
Description	Value	Unit		Version	Description		Date	Approved				
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S				
Resonant Frequency	400	(Hz)										
Frequency Range	400 ~ 4,000	(Hz)										
SPL @ 10cm	106	(dBA)										
Impedance	45	(Ohm)										
Cone Material	Paper											
Nominal Power	0.3	(W)										
Max Power	0.5	(W)										
Mount Type	Flush											
Operating Temperature	-20 ~ +55	°C										
Storage Temperature	-20 ~ +55	°C										
Weight	80	(g)										
						Drawn by		Date	Checked by	Date	Approved by	Date
						A.B.		10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Dynamic Speaker			SP570445-3						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SP570445-3](#)