
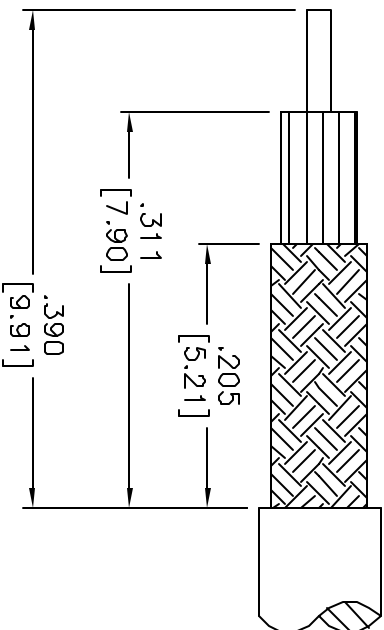
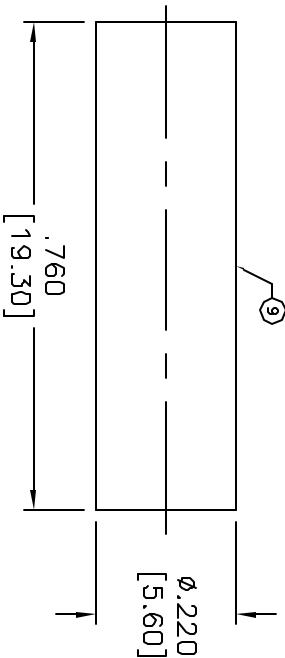




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-FD00A.DWG

REVISIONS				DOC. NO. SPC-FD00A * Effective 7/8/02 * DCP No. 1308	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD
1969	A	RELEASED	JWM	8/29/02	JN
				03/18/08	JN

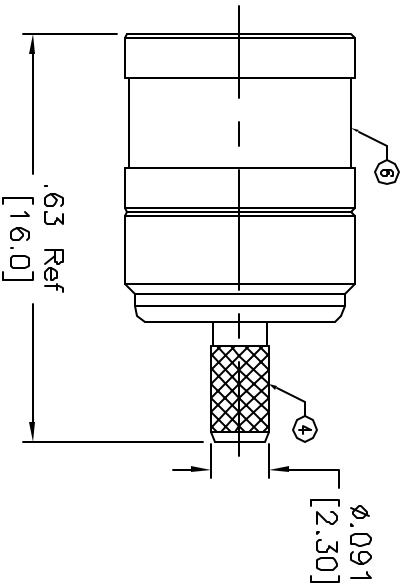

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 75 OHMS
FREQUENCY: DC-4 GHz
FOR RG-179/U

1 BODY	1 BRASS	GOLD, 3 MICRO
2 INSULATOR	1 PTFE	----
3 INSULATOR	1 PTFE	----
4 FERRULE STUD	1 BRASS	GOLD, 3 MICRO
5 RETAINING RING	1 Be, Cu	----
6 SHELL	1 BRASS	GOLD, 3 MICRO
7 CONTACT	1 Be, Cu	GOLD, 30 MICRO
8 FERRULE	1 COPPER	GOLD, 3 MICRO
9 SHRINK TUBING	1 ----	----

#	DESCRIPTION	QTY	MATRL	FINISH
---	-------------	-----	-------	--------

TOLERANCES:

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	8/29/02
CHECKED BY:	DATE:
Jason Nash	03/18/08
APPROVED BY:	DATE:
Jason Nash	03/18/08

DRAWING TITLE:			
SMB Crimp Plug, 75 Ohm			
SIZE	DWG. NO.	ELECTRONIC FILE	
A	SPC10025	18C1898.dwg	
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1