




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

00 10		100000		1000110	<			
27   08   10	<<<	10-08-10	>	13108110	< 			
DATE	APPRVD	DATE	CHECKD	DATE	DRAWN	したいのえてこのス	スピく	DCF #
							]	)
No: 1398	2 * DCP	stive: 7/8/02	s * Effec	DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398	DOC. NO	REVISIONS		

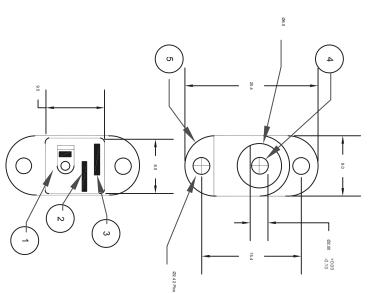

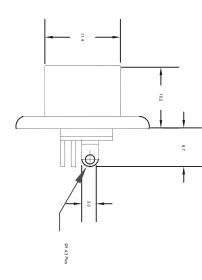

RoHS Compliant





## Specifications:

#### Electrical:

- Contact Rating: 5 at 16 VDC
   Contact Resistance: 30 milliohms maximum.
   Insulation Resistance: 100 Megohms minimum at 500 VDC
   Dielectric Strength: 500 VAC

### Mechanical:

- Insertion Force: 0.3-3.0 kg
   Withdrawal Force: 0.3-3.0 kg
   Operating Life: 5000 insertion/withdrawal cycles

## Environmental:

1. Operating Temperature: -25°C to 70°C

# **Part Number Table**

Item

Pin Terminal
Sleeve Shunt
Sleeve Spring Description

PBT UL94HB	Brass, Nickel Plated	Phosphor Bronze, Silver Plated	Brass, Silver Plated	Brass, Silver Plated	Material/Finish
	DC Power Jack		Description		
	SPC21367		Part Number		

DISCLAMER:  ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HERRIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USEN SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.
17

	ONTAINED UNLESS OT TESTS WE SPECIFIED, DIMENSIONS FOR REFER AND PURPOSES								
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.								
	XXX	APPROVED BY:		JAG	CHECKED BY:	VEE	DRAWN BY:		
,	27-08-10	DAIE:		19-08-10	DATE:	13-08-10	DAIE:		
	SCALE: NTS			XXX	SIZE DWG. NO.		DRAWING TILE:		
	U.O.M.: INCHES [mm]			×××	EL	DC Power Jack			
	SHEET: 1 OF			04N1163	LECTRONIC FILE				

REV