
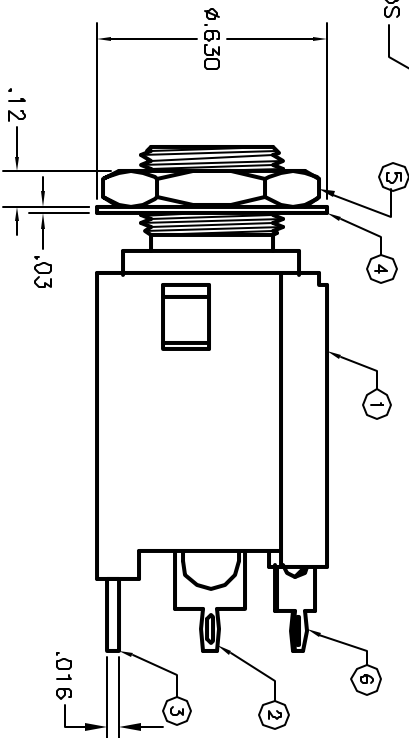
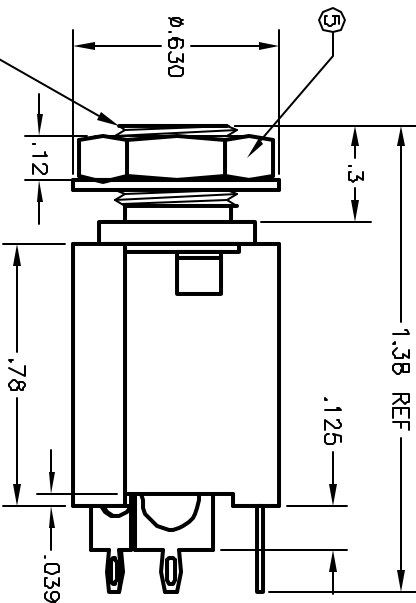
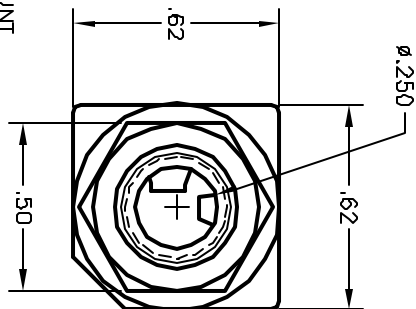


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-P006.DWG

REVISIONS				DOC. NO. SPC-P006	Effective 7/8/02 * DCP No 1398			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1937	A	RELEASED	JWM	8/21/02	JN	04/23/08	JN	04/23/08

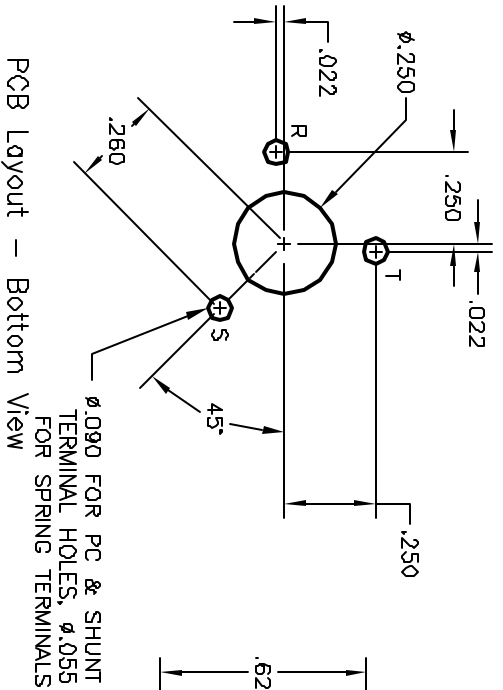

Specifications

ELECTRICAL


Contact rating: 0.25A at 48VDC
Contact Resistance: 20 milliohms Max. Initially,
50 milliohms Max. After life
Insulation Resistance: 50,000 Megohms Min. at 500VDC
Dielectric Strength: 500VAC for One Minute

MECHANICAL

Insertion Force: 0.5 to 3.0 kg
Withdrawal Force: 0.5 to 3.0 kg
Operating Life: 10,000 cycles

ENVIRONMENTAL

Operating Temperature: -40°C to 80°C



PANEL MOUNTING HOLE

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY: Jeff McVicker
CHECKED BY: Jason Nash
APPROVED BY: Jason Nash

DATE: 8/21/02
DATE: 04/23/08
DATE: 04/23/08

DRAWING TITLE:

Three-Conductor Enclosed Phone Jack

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPCSPC21399	11M0594.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1